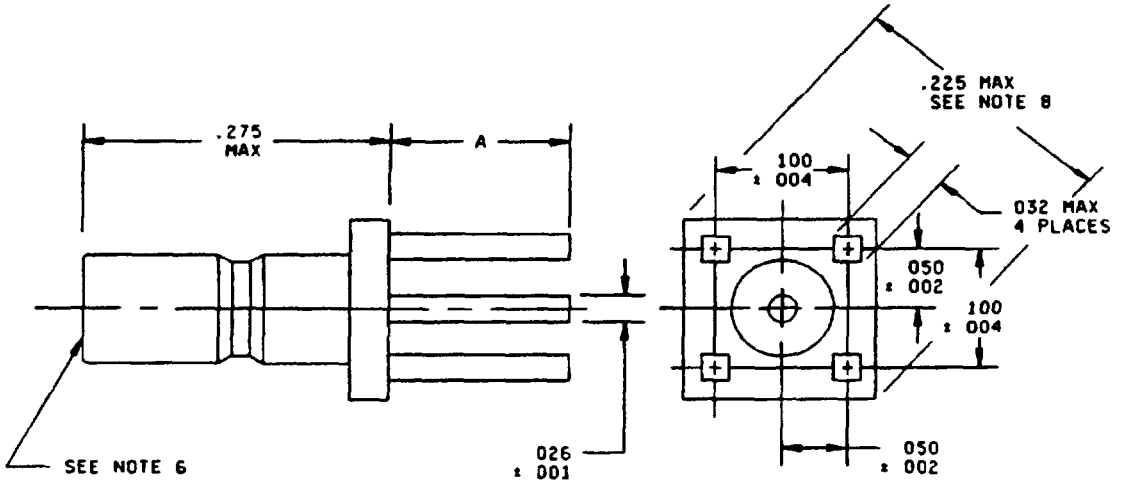
INCH-POUND
MIL-C-39012/141B
29 June 1994
SUPERSEDING
MIL-C-39012/141A
15 November 1993

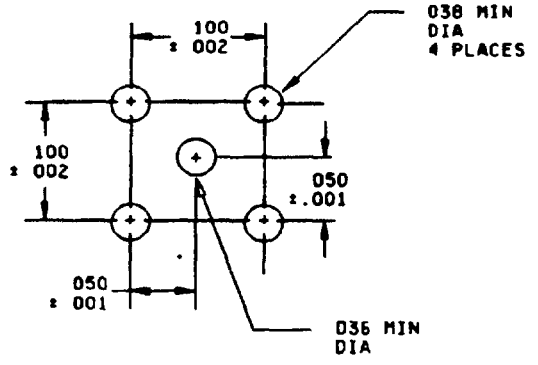
MILITARY SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, SERIES SSMB, PRINTED CIRCUIT BOARD MOUNT, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-39012




RECOMMENDED MOUNTING HOLE CONFIGURATION

FIGURE 1. General configuration


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:22Z
Check the source to verify that this is the current version before use.

| Dash number | Dimension A |
|---|---|
| 0001 (see note 5) | .155 (3.94) ±.010 (0.25) |
| 0002 (see note 5) | .125 (3.18) ±.010 (0.25) |
| 0003 (see note 5) | .093 (2.36) ±.010 (0 25) |
| 0004 (see note 7) | .155 (3 94) ± 010 (0.25) |
| 0005 (see note 7) | 125 (3 18) ± 010 (0 25) |
| 0006 (see note 7) | 093 (2 36) ± 010 (0 25) |

| Inches | mm | Inches | mm |
|---|---|---|---|
| .001 | 0 02 | .038 | 0.97 |
| 002 | 0 05 | .050 | 1.27 |
| .004 | 0 10 | 100 | 2.54 |
| .026 | 0 66 | .221 | 5.61 |
| 030 | 0 76 | .275 | 6.98 |
| 036 | 0 91 | | |

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. All undimensioned pictorial configurations are for reference purposes only
4. Unless otherwise specified, tolerances shall be ±.005 (0.13 mm)
5. Connector bodies shall be gold plated in accordance with MIL-G-45204, type II, class I
6. Series SSMB pin contact interface shall be in accordance with MIL-STD-348
7. Connector bodies shall be silver plated in accordance with MIL-C-39012
8. Configuration of base optional Dimension 225 is the maximum envelope diameter

FIGURE 1 General configuration - Continued



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:22Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA

Nominal impedance. 50 ohms

Frequency range. 0 to 12.4 GHz.

Voltage rating 250 volts rms at sea level, 60 volts rms at 70,000 feet

Temperature rating -65°C to +165°C

REQUIREMENTS

Dimensions and configuration. See figure 1 and MIL-STD-348

Force to engage and disengage

Longitudinal force Not applicable

Torque. Not applicable

Coupling proof torque: Not applicable

Inspection conditions. Not applicable

Mating characteristics. See MIL-STD-348 for dimensions.

Hermetic seal. Not applicable

Leakage (pressurized connectors): Not applicable.

Insulation resistance Method 302, test condition B, MIL-STD-202, 1,000 megohms minimum

Center contact retention: 2 pounds minimum axial force.

Solderability 1/. Method 208 of MIL-STD-202

Corrosion (salt spray): Method 101, test condition B, MIL-STD-202.

Voltage standing wave ratio (VSWR). Not applicable

Connector durability 500 cycles minimum at 12 cycles per minute maximum

Initial: 6.0 pounds maximum engagement.

Final. 6.0 pounds maximum engage and disengage
1.0 pound minimum disengagement

Contact resistance (in milliohms maximum).

| | Initial | After environment |
|---|---|---|
| Center contact: | 4 0 | 6.0 |
| Outer contact: | 1 0 | 1.5 |
| Braid to body | Not applicable | Not applicable |

1/ For quality conformance inspection, the test shall be performed in group B following the insulation resistance test, test 5 samples with no failures permitted.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:22Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage 500 volts rms at sea level

Vibration, high frequency Method 204, test condition B, MIL-STD-202, 15 g's

Shock Method 213, test condition B, MIL-STD-202, 75 g's at 6 milliseconds, 1/2 sine.

Thermal shock Method 107, test condition B, MIL-STD-202.

Contact current rating 1 0 ampere dc

Moisture resistance· Not applicable

Corona level 125 V up to 75,000 feet

RF high potential withstanding voltage

Voltage and frequency. 400 volts rms at 5 0 MHz

Leakage current. Not applicable

Cable retention force. Not applicable

Coupling mechanism retention force Not applicable

RF leakage Not applicable

Insertion loss. Not applicable.

Part or Identifying Number (PIN) M39012/141- (dash number from figure 1).

Group qualification: See table I

NOTE This specification sheet supersedes DESC drawing 86006 when a QPL source is obtained.

TABLE I Group qualification and retention testing

| Group | Submission and qualification of any of the following connectors 1/ | Qualifies the following connectors |
|---|---|---|
| I | M39012/135-0001<br>M39012/135-0002<br>M39012/135-0003<br>M39012/141-0001<br>M39012/141-0002<br>M39012/141-0003 | M39012/135-0001<br>M39012/135-0002<br>M39012/135-0003<br>M39012/141-0001<br>M39012/141-0002<br>M39012/141-0003 |
| II | M39012/135-0004<br>M39012/135-0005<br>M39012/135-0006<br>M39012/141-0004<br>M39012/141-0005<br>M39012/141-0006 | M39012/135-0004<br>M39012/135-0005<br>M39012/135-0006<br>M39012/141-0004<br>M39012/141-0005<br>M39012/141-0006 |

1/ For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of these parts in order to retain qualification for those parts in the corresponding right hand column The part used for qualification retention does not have to be the part initially qualified



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:22Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities
Army - AR, AT, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - ES

(Project 5935-3984)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:22Z
Check the source to verify that this is the current version before use.