
MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), ESTABLISHED RELIABILITY, STYLE CKR05, NATO TYPE DESIGNATION NCC61

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-39014.

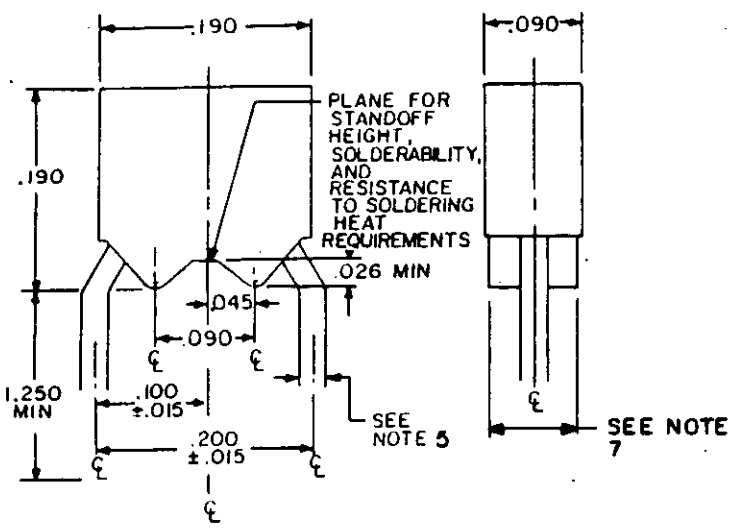

(E) Configuration with standoff.

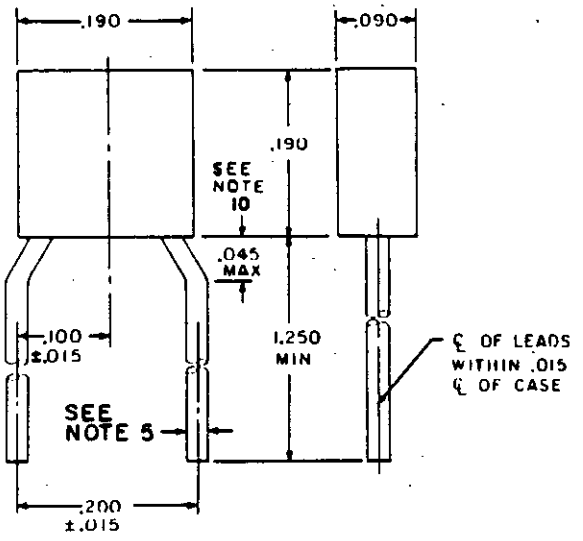

Configuration without standoffs



APPROXIMATE ACTUAL SIZE

Inches	mm
.001	0.03
.004	0.10
.015	0.38
.025	0.64
.026	0.66
.045	1.14
.015	1.90
.090	2.29
.100	2.54
.190	4.83
.200	5.08
1.250	31.75

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Lead length may be a minimum of .625 (15.88 mm) for use in tape and reel automatic insertion equipment, when specified.
5. Lead diameter shall be .023 (0.58 mm) to .029 (0.74 mm).
6. Optional standoffs shall be of triangular shape so that the standoff will provide line contact with the surface upon which the capacitor is mounted.
7. Thickness of the standoffs shall be .075 (1.90 mm) to the body thickness.
8. Insulating coating shall not extend more than .010 (0.22 mm) along lead wires.
9. At the option of the user, the standoff configuration may be substituted as a replacement for the nonstandoff configuration of the same style.
10. For flush mounting .078 (1.98 mm), printed circuit hole diameter is required to clear shoulder.

FIGURE 1. Dimensions and configurations.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Molded or preformed.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Voltage rating: See table I.

Radiographic inspection (failure rate level 'S' (0.001 percent/1,000 hours only)): In accordance with MIL-C-39014.

Dissipation factor: Not more than 2.5 percent.

Dielectric withstanding voltage:

Body insulation: Shall be able to withstand 1,300 volts between leads and case.

Insulation resistance:

At 25°C - Not less than 100,000 megohms or 1,000 megohm-microfarads whichever is less.

At 125°C - Not less than 10,000 megohms or 100 megohm-microfarads whichever is less.

Seal: Not applicable.

Ⓔ Voltage-temperature limits: In accordance with MIL-C-39014.

Capacitance change with reference to 25°C	
Steps A through D of MIL-C-39014, voltage-temperature limit cycle table (table IV) Bias = 0 volt	Steps E through G of MIL-C-39014, voltage-temperature limit cycle table (table IV) Bias = rated voltage
±15 percent	+15, -25 percent

Immersion:

IR - Not less than 50 percent of initial 25°C requirement.

Salt spray (corrosion): Not applicable.

Life:

Rated conditions, 100 percent of dc rated voltage at 125°C.
0 through 3,000 hours:
IR - At 25°C, not less than 50 percent of initial 25°C requirement.
At 125°C, not less than 50 percent of initial 125°C requirement.
ΔC - ±20 percent from initial measured value.
Dissipation factor - Not greater than 2.5 percent.

4,000 through 32,000 hours:
IR - At 25°C, not less than 15 percent of initial 25°C requirement.
At 125°C, not less than 15 percent of initial 125°C requirement.
ΔC - ±20 percent from initial measured value.
Dissipation factor - Not greater than 2.5 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

Accelerated conditions, 200 percent of dc rated voltage at 125°C.
0 and 250 hours:
IR - At 25°C, not less than 50 percent of initial 25°C requirement.
At 125°C, not less than 50 percent of initial 125°C requirement.
ΔC - ±20 percent from initial measured value.
Dissipation factor - Not greater than 2.5 percent.

1,000, 2,000, and 4,000 hours:
IR - At 25°C, not less than 15 percent of initial 25°C requirement.
At 125°C, not less than 15 percent of initial 125°C requirement.
ΔC - ±20 percent from initial measured value.
Dissipation factor - Not greater than 2.5 percent.

Resistance to soldering heat: Resistance to soldering heat shall be in accordance with method 210, test condition D of MIL-STD-202.

ΔC - +15, -5 percent of the initial 25°C measurement.

(E) Solderability: The leads of styles with standoff will be solderable to within .024 inch from the body egress.

(E) Workmanship: Exposed copper or bare leads will be permitted to a maximum of .020 inch from the body egress. For parts without standoffs, workmanship shall be in accordance with MIL-C-39014.

(E) Marking: In accordance with MIL-C-39014 except the minimum marking as shown in the following example will be permitted. Full marking shall be included on the package.

	Front	Reverse side	
	M390	J--	J = Jan, and two digit manufacturer's code or symbol 1/
Specification sheet no.	14/01	8420	
Four digit dash number	1201	A	Date code in accordance with MIL-C-39014
			Lot code

Without optional standoff

Front

M390
14/01
1201V

With optional standoffs

1/ Location of manufacturer's code or symbol is optional.

Part number: M39014/01- (dash number from table I).

Supersession data: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and electrical characteristics.

Dash number				Capacitance	Capacitance tolerance	DC rated voltage
Failure rate level (%/1,000 hours)						
1.0 (M)	0.1 (P)	0.01 (R)	0.001 (S)			
				pF	± percent	volts
1201	1241	1281	1321	10	10	200
1202	1242	1282	1322	10	20	200
1203	1243	1283	1323	12	10	200
1204	1244	1284	1324	15	10	200
1205	1245	1285	1325	15	20	200
1206	1246	1286	1326	18	10	200
1207	1247	1287	1327	22	10	200
1208	1248	1288	1328	22	20	200
1209	1249	1289	1329	27	10	200
1210	1250	1290	1330	33	10	200
1211	1251	1291	1331	33	20	200
1212	1252	1292	1332	39	10	200
1213	1253	1293	1333	47	10	200
1214	1254	1294	1334	47	20	200
1215	1255	1295	1335	56	10	200
1216	1256	1296	1336	68	10	200
1217	1257	1297	1337	68	20	200
1218	1258	1298	1338	82	10	200
1219	1259	1299	1339	100	10	200
1220	1260	1300	1340	100	20	200
1221	1261	1301	1341	120	10	200
1222	1262	1302	1342	150	10	200
1223	1263	1303	1343	150	20	200
1224	1264	1304	1344	180	10	200
1225	1265	1305	1345	220	10	200
1226	1266	1306	1346	220	20	200
1227	1267	1307	1347	270	10	200
1228	1268	1308	1348	330	10	200
1229	1269	1309	1349	330	20	200
1230	1270	1310	1350	390	10	200
1231	1271	1311	1351	470	10	200
1232	1272	1312	1352	470	20	200
1233	1273	1313	1353	560	10	200
1234	1274	1314	1354	680	10	200
1235	1275	1315	1355	680	20	200
1236	1276	1316	1356	820	10	200
1237	1277	1317	1357	1,000	10	200
1238	1278	1318	1358	1,000	20	200
1239	1279	1319	1359	1,200	10	100
1240	1280	1320	1360	1,500	10	100
1441	1481	1521	1561	1,500	20	100
1442	1482	1522	1562	1,800	10	100
1443	1483	1523	1563	2,200	10	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and electrical characteristics - Continued.

Dash number				Capacitance	Capacitance tolerance	DC rated voltage
Failure rate level (Δ/1,000 hours)						
1.0 (M)	0.1 (P)	0.01 (R)	0.001 (S)			
				pF	± percent	volts
1444	1484	1524	1564	2,200	20	100
1445	1485	1525	1565	2,700	10	100
1446	1486	1526	1566	3,300	10	100
1447	1487	1527	1567	3,300	20	100
1448	1488	1528	1568	3,900	10	100
1449	1489	1529	1569	4,700	10	100
1450	1490	1530	1570	4,700	20	100
1451	1491	1531	1571	5,600	10	100
1452	1492	1532	1572	6,800	10	100
1453	1493	1533	1573	6,800	20	100
1454	1494	1534	1574	8,200	10	100
1455	1495	1535	1575	10,000	10	100
1456	1496	1536	1576	10,000	20	100
1457	1497	1537	1577	12,000	10	50
1458	1498	1538	1578	15,000	10	50
1459	1499	1539	1579	15,000	20	50
1460	1500	1540	1580	18,000	10	50
1461	1501	1541	1581	22,000	10	50
1462	1502	1542	1582	22,000	20	50
1463	1503	1543	1583	27,000	10	50
1464	1504	1544	1584	33,000	10	50
1465	1505	1545	1585	33,000	20	50
1466	1506	1546	1586	39,000	10	50
1467	1507	1547	1587	47,000	10	50
1468	1508	1548	1588	47,000	20	50
1469	1509	1549	1589	56,000	10	50
1470	1510	1550	1590	68,000	10	50
1471	1511	1551	1591	68,000	20	50
1472	1512	1552	1592	82,000	10	50
1473	1513	1553	1593	100,000	10	50
1474	1514	1554	1594	100,000	20	50

Capacitors with standoffs shall be designated (i.e., 39014/01-1210V, 39014/01-1358V, etc.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Substitutability data.

Dash number in MIL-C-39014/1E 1/				Dash number in MIL-C-39014/1D 1/				Dash number in MIL-C-39014/1C 1/					Substitutable for dash number in:									
													MIL-C-39014/1A and /1B					MIL-C-39014/1				
M	P	R	S	M	P	R	S	L	M	P	R	S	L 2/	M	P	R	S	L	M	P	R	S
1201	1241	1281	1321	1201	1241	1281	1321	1361	1201	1241	1281	1321	0361	0201	0241	0281	0321	-	0001	0002	0003	0004
1202	1242	1282	1322	1202	1242	1282	1322	1362	1202	1242	1282	1322	0362	0202	0242	0282	0322	-	0005	0006	0007	0008
1203	1243	1283	1323	1203	1243	1283	1323	1363	1203	1243	1283	1323	0363	0203	0243	0283	0323	-	0009	0010	0011	0012
1204	1244	1284	1324	1204	1244	1284	1324	1364	1204	1244	1284	1324	0364	0204	0244	0284	0324	-	0013	0014	0015	0016
1205	1245	1285	1325	1205	1245	1285	1325	1365	1205	1245	1285	1325	0365	0205	0245	0285	0325	-	0017	0018	0019	0020
1206	1246	1286	1326	1206	1246	1286	1326	1366	1206	1246	1286	1326	0366	0206	0246	0286	0326	-	0021	0022	0023	0024
1207	1247	1287	1327	1207	1247	1287	1327	1367	1207	1247	1287	1327	0367	0207	0247	0287	0327	-	0025	0026	0027	0028
1208	1248	1288	1328	1208	1248	1288	1328	1368	1208	1248	1288	1328	0368	0208	0248	0288	0328	-	0029	0030	0031	0032
1209	1249	1289	1329	1209	1249	1289	1329	1369	1209	1249	1289	1329	0369	0209	0249	0289	0329	-	0033	0034	0035	0036
1210	1250	1290	1330	1210	1250	1290	1330	1370	1210	1250	1290	1330	0370	0210	0250	0290	0330	-	0037	0038	0039	0040
1211	1251	1291	1331	1211	1251	1291	1331	1371	1211	1251	1291	1331	0371	0211	0251	0291	0331	-	0041	0042	0043	0044
1212	1252	1292	1332	1212	1252	1292	1332	1372	1212	1252	1292	1332	0372	0212	0252	0292	0332	-	0045	0046	0047	0048
1213	1253	1293	1333	1213	1253	1293	1333	1373	1213	1253	1293	1333	0373	0213	0253	0293	0333	-	0049	0050	0051	0052
1214	1254	1294	1334	1214	1254	1294	1334	1374	1214	1254	1294	1334	0374	0214	0254	0294	0334	-	0053	0054	0055	0056
1215	1255	1295	1335	1215	1255	1295	1335	1375	1215	1255	1295	1335	0375	0215	0255	0295	0335	-	0057	0058	0059	0060
1216	1256	1296	1336	1216	1256	1296	1336	1376	1216	1256	1296	1336	0376	0216	0256	0296	0336	-	0061	0062	0063	0064
1217	1257	1297	1337	1217	1257	1297	1337	1377	1217	1257	1297	1337	0377	0217	0257	0297	0337	-	0065	0066	0067	0068
1218	1258	1298	1338	1218	1258	1298	1338	1378	1218	1258	1298	1338	0378	0218	0258	0298	0338	-	0069	0070	0071	0072
1219	1259	1299	1339	1219	1259	1299	1339	1379	1219	1259	1299	1339	0379	0219	0259	0299	0339	-	0073	0074	0075	0076
1220	1260	1300	1340	1220	1260	1300	1340	1380	1220	1260	1300	1340	0380	0220	0260	0300	0340	-	0077	0078	0079	0080
1221	1261	1301	1341	1221	1261	1301	1341	1381	1221	1261	1301	1341	0381	0221	0261	0301	0341	-	0081	0082	0083	0084
1222	1262	1302	1342	1222	1262	1302	1342	1382	1222	1262	1302	1342	0382	0222	0262	0302	0342	-	0085	0086	0087	0088
1223	1263	1303	1343	1223	1263	1303	1343	1383	1223	1263	1303	1343	0383	0223	0263	0303	0343	-	0089	0090	0091	0092
1224	1264	1304	1344	1224	1264	1304	1344	1384	1224	1264	1304	1344	0384	0224	0264	0304	0344	-	0093	0094	0095	0096
1225	1265	1305	1345	1225	1265	1305	1345	1385	1225	1265	1305	1345	0385	0225	0265	0305	0345	-	0097	0098	0099	0100
1226	1266	1306	1346	1226	1266	1306	1346	1386	1226	1266	1306	1346	0386	0226	0266	0306	0346	-	0101	0102	0103	0104
1227	1267	1307	1347	1227	1267	1307	1347	1387	1227	1267	1307	1347	0387	0227	0267	0307	0347	-	0105	0106	0107	0108
1228	1268	1308	1348	1228	1268	1308	1348	1388	1228	1268	1308	1348	0388	0228	0268	0308	0348	-	0109	0110	0111	0112
1229	1269	1309	1349	1229	1269	1309	1349	1389	1229	1269	1309	1349	0389	0229	0269	0309	0349	-	0113	0114	0115	0116
1230	1270	1310	1350	1230	1270	1310	1350	1390	1230	1270	1310	1350	0390	0230	0270	0310	0350	-	0117	0118	0119	0120
1231	1271	1311	1351	1231	1271	1311	1351	1391	1231	1271	1311	1351	0391	0231	0271	0311	0351	-	0121	0122	0123	0124
1232	1272	1312	1352	1232	1272	1312	1352	1392	1232	1272	1312	1352	0392	0232	0272	0312	0352	-	0125	0126	0127	0128
1233	1273	1313	1353	1233	1273	1313	1353	1393	1233	1273	1313	1353	0393	0233	0273	0313	0353	-	0129	0130	0131	0132
1234	1274	1314	1354	1234	1274	1314	1354	1394	1234	1274	1314	1354	0394	0234	0274	0314	0354	-	0133	0134	0135	0136
1235	1275	1315	1355	1235	1275	1315	1355	1395	1235	1275	1315	1355	0395	0235	0275	0315	0355	-	0137	0138	0139	0140
1236	1276	1316	1356	1236	1276	1316	1356	1396	1236	1276	1316	1356	0396	0236	0276	0316	0356	-	0141	0142	0143	0144
1237	1277	1317	1357	1237	1277	1317	1357	1397	1237	1277	1317	1357	0397	0237	0277	0317	0357	-	0145	0146	0147	0148
1238	1278	1318	1358	1238	1278	1318	1358	1398	1238	1278	1318	1358	0398	0238	0278	0318	0358	-	0149	0150	0151	0152
													MIL-C-39014/1B only									
1239	1279	1319	1359	1239	1279	1319	1359	1399	1239	1279	1319	1359	0399	0239	0279	0319	0359	-	-	-	-	-
1240	1280	1320	1360	1240	1280	1320	1360	1400	1240	1280	1320	1360	0400	0240	0280	0320	0360	-	-	-	-	-
1441	1481	1521	1561	1441	1481	1521	1561	1401	1441	1481	1521	1561	0401	0441	0481	0521	0561	-	-	-	-	-
1442	1482	1522	1562	1442	1482	1522	1562	1402	1442	1482	1522	1562	0402	0442	0482	0522	0562	-	-	-	-	-
1443	1483	1523	1563	1443	1483	1523	1563	1403	1443	1483	1523	1563	0403	0443	0483	0523	0563	-	-	-	-	-
1444	1484	1524	1564	1444	1484	1524	1564	1404	1444	1484	1524	1564	0404	0444	0484	0524	0564	-	-	-	-	-
1445	1485	1525	1565	1445	1485	1525	1565	1405	1445	1485	1525	1565	0405	0445	0485	0525	0565	-	-	-	-	-
1446	1486	1526	1566	1446	1486	1526	1566	1406	1446	1486	1526	1566	0406	0446	0486	0526	0566	-	-	-	-	-
1447	1487	1527	1567	1447	1487	1527	1567	1407	1447	1487	1527	1567	0407	0447	0487	0527	0567	-	-	-	-	-
1448	1488	1528	1568	1448	1488	1528	1568	1408	1448	1488	1528	1568	0408	0448	0488	0528	0568	-	-	-	-	-
1449	1489	1529	1569	1449	1489	1529	1569	1409	1449	1489	1529	1569	0409	0449	0489	0529	0569	-	-	-	-	-
1450	1490	1530	1570	1450	1490	1530	1570	1410	1450	1490	1530	1570	0410	0450	0490	0530	0570	-	-	-	-	-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Substitutability data - Continued.

Dash number in MIL-C-39014/1E 1/				Dash number in MIL-C-39014/1D 1/				Dash number in MIL-C-39014/1C 1/					Substitutable for dash number in:									
													MIL-C-39014/1A and /1B					MIL-C-39014/1				
M	P	R	S	M	P	R	S	L	M	P	R	S	L 2/	M	P	R	S	L	M	P	R	S
1451	1491	1531	1571	1451	1491	1531	1571	1411	1451	1491	1531	1571	0411	0451	0491	0531	0571	-	-	-	-	-
1452	1492	1532	1572	1452	1492	1532	1572	1412	1452	1492	1532	1572	0412	0452	0492	0532	0572	-	-	-	-	-
1453	1493	1533	1573	1453	1493	1533	1573	1413	1453	1493	1533	1573	0413	0453	0493	0533	0573	-	-	-	-	-
1454	1494	1534	1574	1454	1494	1534	1574	1414	1454	1494	1534	1574	0414	0454	0494	0534	0574	-	-	-	-	-
1455	1495	1535	1575	1455	1495	1535	1575	1415	1455	1495	1535	1575	0415	0455	0495	0535	0575	-	-	-	-	-
1456	1496	1536	1576	1456	1496	1536	1576	1416	1456	1496	1536	1576	0416	0456	0496	0536	0576	-	-	-	-	-
1457	1497	1537	1577	1457	1497	1537	1577	1417	1457	1497	1537	1577	0417	0457	0497	0537	0577	-	-	-	-	-
1458	1498	1538	1578	1458	1498	1538	1578	1418	1458	1498	1538	1578	0418	0458	0498	0538	0578	-	-	-	-	-
1459	1499	1539	1579	1459	1499	1539	1579	1419	1459	1499	1539	1579	0419	0459	0499	0539	0579	-	-	-	-	-
1460	1500	1540	1580	1460	1500	1540	1580	1420	1460	1500	1540	1580	0420	0460	0500	0540	0580	-	-	-	-	-
1461	1501	1541	1581	1461	1501	1541	1581	1421	1461	1501	1541	1581	0421	0461	0501	0541	0581	-	-	-	-	-
1462	1502	1542	1582	1462	1502	1542	1582	1422	1462	1502	1542	1582	0422	0462	0502	0542	0582	-	-	-	-	-
1463	1503	1543	1583	1463	1503	1543	1583	1423	1463	1503	1543	1583	0423	0463	0503	0543	0583	-	-	-	-	-
1464	1504	1544	1584	1464	1504	1544	1584	1424	1464	1504	1544	1584	0424	0464	0504	0544	0584	-	-	-	-	-
1465	1505	1545	1585	1465	1505	1545	1585	1425	1465	1505	1545	1585	0425	0465	0505	0545	0585	-	-	-	-	-
1466	1506	1546	1586	1466	1506	1546	1586	1426	1466	1506	1546	1586	0426	0466	0506	0546	0586	-	-	-	-	-
1467	1507	1547	1587	1467	1507	1547	1587	1427	1467	1507	1547	1587	0427	0467	0507	0547	0587	-	-	-	-	-
1468	1508	1548	1588	1468	1508	1548	1588	1428	1468	1508	1548	1588	0428	0468	0508	0548	0588	-	-	-	-	-
1469	1509	1549	1589	1469	1509	1549	1589	1429	1469	1509	1549	1589	0429	0469	0509	0549	0589	-	-	-	-	-
1470	1510	1550	1590	1470	1510	1550	1590	1430	1470	1510	1550	1590	0430	0470	0510	0550	0590	-	-	-	-	-
1471	1511	1551	1591	1471	1511	1551	1591	1431	1471	1511	1551	1591	0431	0471	0511	0551	0591	-	-	-	-	-
1472	1512	1552	1592	1472	1512	1552	1592	1432	1472	1512	1552	1592	0432	0472	0512	0552	0592	-	-	-	-	-
1473	1513	1553	1593	1473	1513	1553	1593	1433	1473	1513	1553	1593	0433	0473	0513	0553	0593	-	-	-	-	-
1474	1514	1554	1594	1474	1514	1554	1594	1434	1474	1514	1554	1594	0434	0474	0514	0554	0594	-	-	-	-	-

1/ Dash numbers in lower FR level columns are substitutable for dash numbers in all higher FR level columns.

2/ Revision B only.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - TD
Air Force - 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1594)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:24Z
Check the source to verify that this is the current version before use.