
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-3202/UF

This specification sheet is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-49030(EL).

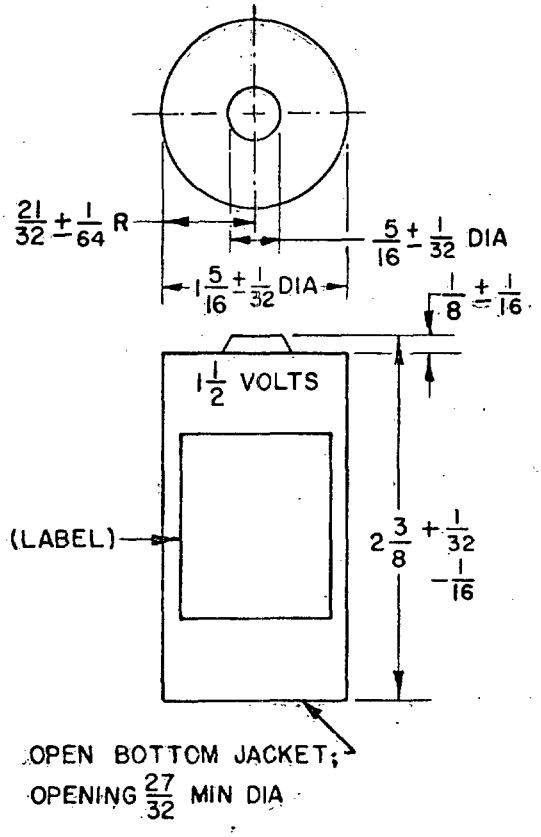

INCHES	MM
1/64	.40
1/32	.79
1/16	1.59
1/8	3.18
5/16	7.94
21/32	16.67
27/32	21.43
1 5/16	33.34
2 3/8	60.33

NOTES:

1. All dimensions shown on figure are in inches.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.5 volts.

Number and type of cells: 1 "D" cell.

Terminals: Flat surface.

Weight (maximum): 5.5 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: I, LT, and HT.

Quality conformance inspection:

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Electrical insulation continuity.
Capacity: LT, HT, T and D.

Methods of examinations and test:

Capacity tests: See requirements for capacity specified herein.

Test	Number of Samples	Storage Period	Temperature	Minimum Svce Required
I (Initial 70°F)	all	48 Hrs. Min.	70°F	2.5 Hrs
LT (-25°F) 1/	all	16 Hrs. Min.	-25°F 1/	5.0 Minutes
HT (160°F)	all	7 days plus	160°F	
		48 Hrs Min.	70°F	1.6 Hrs.
T	2/3	13 Wks plus	113°F	
		48 Hrs Min.	70°F	2.2 Hrs.
	1/3	13 Wks plus	113°F	
		16 Hrs Min.	-25°F 1/	1.0 Minute
D	2/3	52 Wks	70°F	1.8 Hrs
	1/3	52 Wks	70°F	
		16 Hrs Min.	-25°F 1/	1.5 Minutes

1/ Modification from test specified in basic Specification MIL-B-49030(EL). Normal conditions are -25°F ± 2°F; extreme conditions are -30°F through -27°F and -20°F through -23°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Discharge - The battery shall be discharged through 0.81 ohm continuously to an end voltage of 0.775 volt.

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 5.983 ohms.

Electrolyte leakage - The battery shall be discharged through 5.00 ohms for 24 hours.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.35

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - EL

Preparing Activity:
Army - EL

(Project 6135-A142-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.