MIL-C-83390 (USAF)
AMENDMENT 2
27 July 1976
SUPERSEDING
AMENDMENT 1
5 September 1974

MILITARY SPECIFICATION

CONNECTOR, HOSE, QUICK-ACTING, MALE, ANTI-G GARMENT

This amendment forms a part of Military Specification MIL-C-83390 (USAF) dated 1 September 1972.

Page 1, paragraph 2.1, Federal Specifications: Add "QQ-A-200/3 Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire, Extruded, 2024" and "QQ-A-225/6 Aluminum Alloy Bar, Rod, and Wire; Rolled, Drawn, or Cold Finished, 2024".

Page 1, paragraph 2.1, Military Specifications: Add "MIL-A-8625 Anodic Coatings, for Aluminum and Aluminum Alloys".

Page 2, paragraph 3.3.1: Between the second and third sentences add "The metal used to fabricate the body of the connector shall be aluminum alloy 2024, temper T4 of QQ-A-200/3 or QQ-A-225/6 and shall be anodized and dyed black in accordance with type II of MIL-A-8625." Delete "All" in the fifth line and substitute "Unless otherwise specified in figure 1, all".

Page 3, paragraph 3.5.2: Delete and substitute:

> "3.5.2 Emergency pressure relief. When an anti-g garment, pressurized to 8 psi, is disconnected from the air pressure source, the connector shall provide for deflation of the anti-g garment to 1.5 (plus or minus 0.25) psi internal pressure within 4 seconds. The anti-g garment shall maintain the internal pressure of not less than 0.3 psi for a 4-hour period."

Page 4, figure 1: Delete and substitute the figure 1 that forms page 2 of this amendment.

Page 5, paragraph 3.7, second line: Delete "CSU-12/P" and substitute "CSU-12/P, CSU-13A/P, or CSU-13B/P".

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Reviewer:
Air Force - 99

Project No. 4730-F628

☆U.S. GOVERNMENT PRINTING OFFICE: 1976–603-766/6170

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:54Z
Check the source to verify that this is the current version before use.

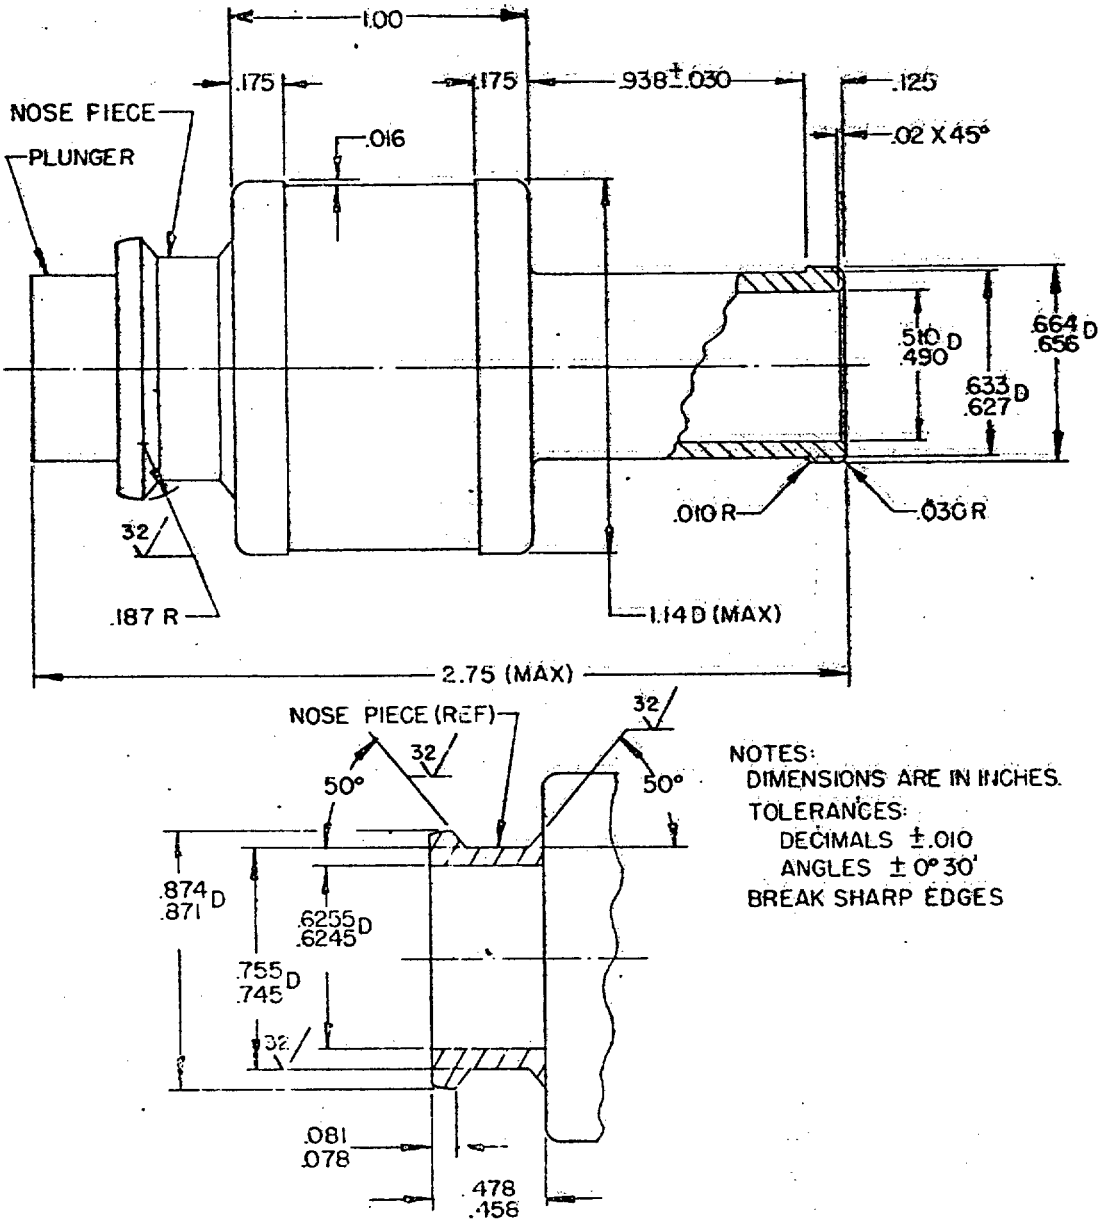


FIGURE 1. Connector

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:54Z
Check the source to verify that this is the current version before use.