MILITARY SPECIFICATION

DESK: FLAT TOP, VEHICULAR MOUNTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a flat-top desk designed for vehicular mounting.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-T-60	- Tape: Packaging, Waterproof.

Military

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

Federal

FED. STD. No. 595	- Colors.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Description. The desk shall be as shown in Figure 1 and as specified herein.

3.2 Material. Material shall be as specified herein. Material not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.2.1 Steel. Unless otherwise specified (see 6.2), steel sheet, tubing, and angle shall be of commercial quality with composition, finish, condition, and temper at option of supplier

3.2.1.1 Sheet steel. Sheet steel shall be not less than 0.036 inch thick.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the currentversion before use.

3.2.1.2 Steel tubing. Steel tubing shall be square shaped, 2.50 inches outside dimension, 0.083 inch wall thickness.

3.3 Construction.

3.3.1 Assembly. All joints shall be welded. Each member constructed of sheet steel shall be braced with reinforcing panels, channels, or sections wherever necessary to form a rigid and stable structure.

3.3.2 Pedestal. The sides, back, and front edges of the pedestal shall be formed from one piece of sheet steel. The front edges shall be formed channel-shaped. The vertical edges of the pedestal shall be rounded to not less than 0.188-inch radii. The bottom horizontal edges shall be rounded to not less than 0.125-inch radii. The overall width of the pedestal shall not be greater than 16.50 inches. The right-hand legs shall be centered from left to right under the pedestal to provide maximum support, and the front and back edges of the pedestal shall overhang the legs by 1.00 inch. A staple plate for the locking bar shall be welded to the pedestal as shown in Figure 1.

3.3.3 End panel. The end panel shall be constructed of two pieces of sheet steel, the outside sheet and the inside sheet. The outside sheet shall be formed box shaped. The bottom edges of the two sheets shall meet each other before welding. The bottom horizontal edges shall be rounded to not less than 0.125-inch radii. The end panel shall extend from leg to leg on the left side of the desk, and the height of the end panel shall be the same as the height of the pedestal.

3.3.4 Knee space back panel. The knee space back panel shall be formed from a single piece of sheet steel and shaped for strength and to provide adequate areas for welding to adjoining members. The bottom edge shall be rolled or otherwise shaped to prevent damage to wearing apparel and injury to the user. The knee space back panel shall be the full height of the pedestal and the end panel.

3.3.5 Top. The top shall be formed box-shaped from a single piece of sheet steel with reinforcement members welded to the bottom surface. The method of reinforcement is at the option of the supplier. The top horizontal edges shall be rounded to not less than 0.188-inch radii. The bottom horizontal edges shall be beaded or otherwise shaped to prevent injury to the user. The four top corners shall be rounded to not less than 0.250-inch radii. The top shall overhang all other components by 1.00-inch on all four sides. The top shall support a weight of 600 pounds for 5 minutes in any 12-inch diameter area of the top surface without deflection of more than 0.125-inch, and without permanent set or other permanent deformation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

3.3.6 Drawers.

3.3.6.1 Dimensions. Any dimensions of the drawer fronts shall not be more than 0.125-inch less than the corresponding dimension of the opening. The minimum inside dimensions of the drawers shall be as follows:

Utility drawer.	- 19 inches wide, 2 inches high, 23 inches deep.
Storage drawer.	- 12 inches wide, 5 inches high, 23 inches deep.
File drawer.	- 12 inches wide, 10 inches high, 23 inches deep.

3.3.6.2 Drawer fronts. The drawer fronts shall be of double wall construction and shall fit squarely in the drawer openings. The center of each drawer pull shall coincide with the horizontal center of the drawer front on which it is installed.

3.3.6.3 Drawer latch. Each drawer shall have an automatic latch which is released by a finger-controlled mechanism. The finger control may be a button or lever, and shall be located so that it can be released when the user's hand is in position on the drawer pull. The latch shall automatically hold the drawer in a closed position. The latch shall prevent the drawer from opening, even when the loaded drawer is subjected to the shock and vibration encountered when the desk is mounted in a motorized van traversing rough terrain, unless the latch is released by the finger control mechanism. The latching mechanism, except for the locking hook, shall be concealed between the drawer pans. The catch may be formed from the drawer suspension member or the front interior vertical reinforcing member in such a way as to positively and automatically engage the hook, and in a manner to prevent shearing or tearing of the catch by the hook. The button or lever shall be fabricated from satin-finished anodized aluminum; Type 302 corrosion-resistant steel; satin-finished chromium on steel; or die-cast zinc, brass, or bronze.

3.3.6.4 Drawer bodies. Each drawer body, not including the drawer back, shall be formed from one piece of sheet steel. The top edges of all sides shall be beaded, channeled, or folded for safety and rigidity.

3.3.6.5 Drawer backs. Each drawer back shall be the same height as the drawer body and shall be welded to the drawer sides and bottom.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:34Z
Check the source to verify that this is the current version before use.

3.3.7 Drawer suspensions and stops. The drawers shall operate on slide suspensions with glides of nylon or other durable material which will permit the drawers to open and close freely without binding. Each drawer shall engage two positive stops, one on each side of the drawer, which will prevent the drawer from falling out when fully extended, but will permit easy removal of the drawer when desired. The stops shall be furnished with bumpers of rubber or other durable energy absorbing material.

3.3.8 Legs. Desk legs shall be of steel tubing and shall not have foot sockets.

3.3.9 Locking bar. A locking bar for keeping the drawers closed shall be fabricated as shown in Figure 1 from steel bar 0.125 inch thick.

3.3.10 Staple plate. A staple plate for the locking bar shall have the dimensions used for a 3-inch hasp.

3.4 Identification marking. The desk shall be identified in accordance with MIL-STD-130.

3.5 Treatment and painting. The portions of the desk normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A, Color No. 24525 of FED. STD. No. 595.

3.6 Workmanship.

3.6.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.6.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parent materials, weld filler metals, and fabrication techniques shall be as required to enable the desk to conform to the

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:34Z
Check the source to verify that this is the currentversion before use.

examination and test requirements specified in Section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch, unless appropriate bridging techniques are used. Unless otherwise specified (see 6.2), the welding process used in fabrication of the desk shall be at the option of the supplier.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of preparation for delivery (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for the major and minor defects specified in 4.4.1. AQL shall be 4.0 percent defective for major defects and 15.0 percent defective for minor defects.

4.3.3 Tests. Samples selected in accordance with 4.3.1 shall be tested as specified in 4.4.2. AQL shall be 4.0 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The desk shall be examined as specified herein for the following defects:

Major

101. Desk not as shown in Figure 1.
102. Material not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

103. Construction not as specified.
104. Workmanship not as specified.

Minor

201. Identification not as specified.
202. Treatment and painting not as specified.

4.4.2 Tests.

4.4.2.1 Top-load. Apply a weight of 600 pounds for 5 minutes to an area 12 inches in diameter directly over the center of the knee space. Measure the deflection of the top surface while the weight is applied. Remove the weight and examine the top surface for any permanent set or other deformation. Nonconformance to 3.3.5 shall constitute failure of this test.

4.5 Inspection of preparation for delivery.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

105. Materials and containers not as specified. Each incorrect material or container shall be considered one defect.
106. Lubrication not as specified for Level A.
107. Desks not wrapped or wrap not secured as specified for Level A.
108. Blocking and bracing not as specified for Level A or B.
109. Fiberboard boxes not closed as specified for Level B.
110. Marking illegible, incomplete or incorrect.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Parts of the desk requiring lubrication shall be lubricated with the manufacturer's recommended lubricant. The table drawers shall be secured in a closed position. The table shall be wrapped with a polyethylene material, 1-1/2 mil minimum thickness. The wrap shall be secured with tape PPP-T-60, Type III or IV.

5.1.2 Level C. The desks shall be packaged to afford protection against deterioration and damage during shipment from the supplier to the initial destination.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A. The desks shall be packed in boxes conforming to PPP-B-601, Overseas Type, Grade B or PPP-B-621, Class 2. The desks shall be blocked and braced in the containers in accordance with MIL-STD-1186 using fiberboard conforming to PPP-F-320, Class Weather Resistant.

5.2.2 Level B. The desks shall be packed and blocked and braced as specified in 5.2.1 for Level A except the boxes shall be Domestic Type; or the boxes shall be in accordance with PPP-B-636, Class Weather Resistant, grade as required for size and weight limitations. Fiberboard boxes shall be closed Method V of the box specification appendix.

5.2.3 Level C. The desks shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest rating in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. Marking of packages and shipping containers shall be in accordance with MIL-STD-129.

6. *NOTES*

6.1 Intended use. The desk is intended for use in a mobile-control section, surveying equipment van. NSN 2540-00-720-1222, which is used in Equipment Set 3610-97-CL-E45, applies thereto. This specification is intended to replace CE PD-458, dated 10 September 1957.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Specific steel sheet, tubing, or angle required, if other than at option of supplier (see 3.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

(c) Welding process required, if other than at option of supplier (see 3.6.2).
(d) Level of preservation and packaging and level of packing required (see 5.1 and 5.2).

Custodian:


Army - ME

Preparing activity:

Army - ME


Project No. 2540-A241

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

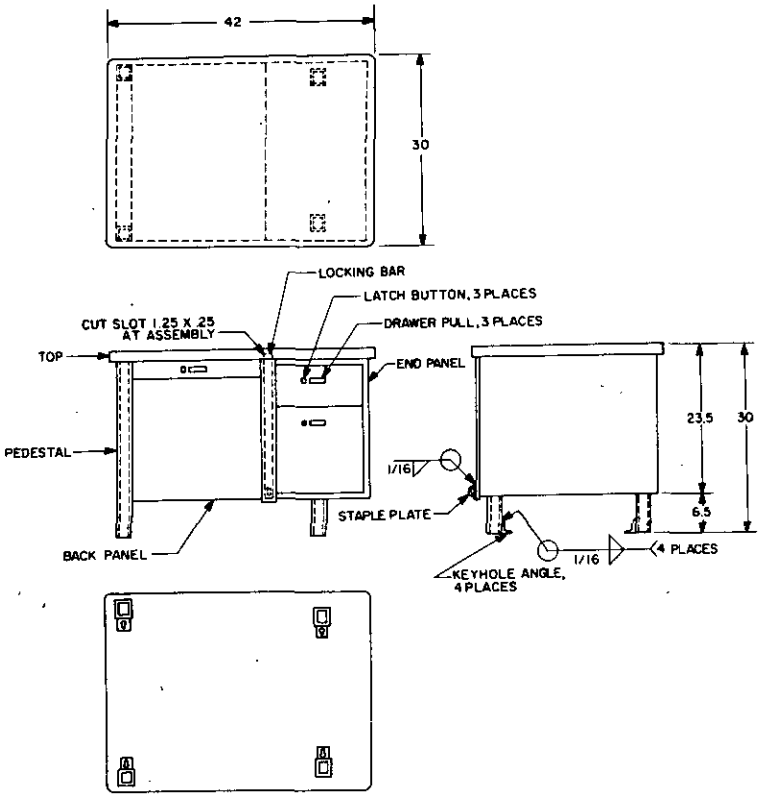


BOTTOM VIEW SHOWING LOCATION OF DESK LEGS AND KEY HOLE ANGLES


NOTE:
ALL DIMENSIONS IN INCHES



KEY HOLE ANGLE, FRONT LEGS



KEY HOLE ANGLE, REAR LEGS

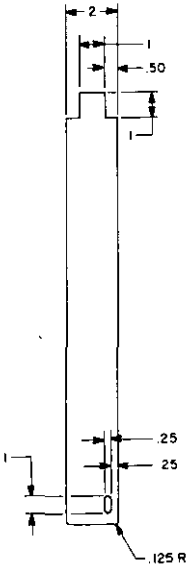

LOCKING BAR, CUT LENGTH TO FIT

FIGURE 1. DESK, FLAT TOP, VEHICULAR MOUNTING

X-2723

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-D-52816(ME) - Desk: Flat Top, Vehicular Mounting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.