NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/88D
26 October 1998
SUPERSEDING
MIL-DTL-11484/88C
27 September 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, APOLLO ACHIEVEMENT, NASA

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

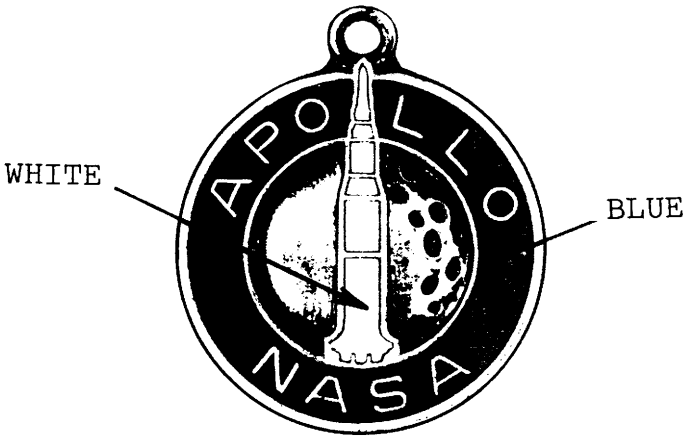

DASH NO.
-1: Male
-2: Female

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Oxidized, Relieved, Matte Finish

DIMENSIONS:
DIAMETER: 11/16 inch (1.75 cm) (REF)
THICKNESS (at edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:35Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below.

COLOR	CHIP NO.
Blue	18
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The illustration shown is Dash No. -2. The design for Dash No -1 is identical except there is no integral lug located above the nose cone of the missile.

5. The attaching device for Dash No. -1 shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

6. The attaching device for Dash No. -2 shall be an integral lug and shall be cut into the working die. The lug shall have a 1/8 inch ± 1/64 inch (0.318 cm ± 0.04 cm)outside diameter with a 1/16 inch ± 1/64 inch (0.159 cm ± 0.04 cm) diameter hole centered inside the lug. Each lapel button shall have a jump ring formed from a 0.035 inch ± 0.005 inch (0.089 cm ± 0.013 cm) diameter brass wire mounted through the lug. The jump ring shall be oblong and 1/8 inch ± 1/32 inch (0.318 cm ± 0.079 cm) long. The ends of the wire shall be either straight or bias cut and shall be aligned and together. The jump ring shall be lacquered.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0959)

Civil Agency Coordinating activities:
NASA - NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:35Z
Check the source to verify that this is the current version before use.