NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/93E
8 April 2020
SUPERSEDING
MIL-DTL-11484/93D
30 September 2008

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, AWARD FOR EXCELLENCE, DEFENSE INTELLIGENCE AGENCY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

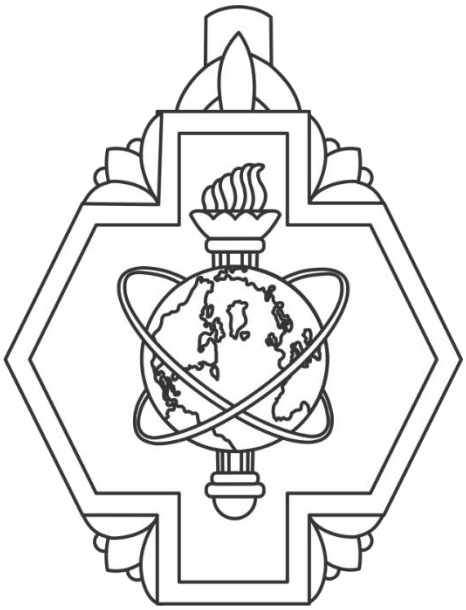

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Metal Finish Chip Number 8.

DIMENSIONS:

HEIGHT (Overall): 9/16 inch (REF)
WIDTH (Overall): 1/2 inch (REF)
THICKNESS (At edge): 0.050 inch ± 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:37Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:

1. Attaching device shall be prong with pick and wing type clutch.

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lapel button shall be lacquered.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
DIA - DI

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-254)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:37Z
Check the source to verify that this is the current version before use.