NOT MEASUREMENT SENSITIVE

MIL-L-11484/95B
14 January 1994
SUPERSEDING
MIL-L-11484/95A
27 June 1988

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, CONGRESSIONAL SPACE MEDAL OF FREEDOM

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

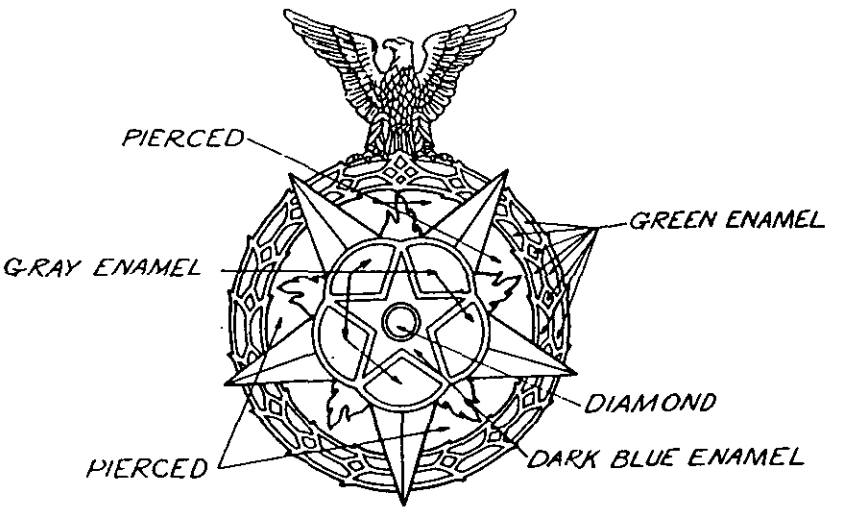

MATERIAL: Gilding Medal

DIMENSIONS:
HEIGHT (Overall): 3/4 inch (1.91 cm) (REF)
WIDTH (Overall): 7/16 inch (1.11 cm) (REF)
THICKNESS (On Flat of Star): 0.085 inch ± 0.005 inch (0.216 cm ± 0.012 cm)

FINISH: Hard Enameled, Gold Plated, Rose Gold Plated, Relieved, Matte Finish

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T16:38Z
Check the source to verify that this is the current version before use.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Green	11
Blue	20
Gray	34

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Piercing shall be as indicated.

5. The diamond shall be 0.02 carat and shall be set in a 3 or 4 bead setting.

6. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

7. The entire lapel button shall be lacquered.

Custodians:
Army - IH

Review activities:
DLA - CT

User activities:
Other - NASA

Preparing activity:
Army - IH

(Project No. 8455-0743)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:38Z
Check the source to verify that this is the current version before use.