MILITARY SPECIFICATION

INDICATOR, TEMPERATURE, SYNCHRO

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a single-pointer, white-lighted, 115V synchro-operated indicator with 100°C to 1200°C temperature range.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood Cleated-Plywood
PPP-B-636	Box, Shipping, Fiberboard

MILITARY

MIL-P-116	Preservation, Methods of
MIL-E-5400	Electronic Equipment, Aerospace, General Specification for
MIL-I-7057	Indicator, Synchro, Aircraft, General Specification for
MIL-S-20708	Synchros, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio ALC/MMEDO, Kelly AFB, Texas 78241 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6685

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

MIL-C-25516/17	Connector, Electrical, Miniature, Coaxial, Environmental Resistant Type, Coaxial Hermetically Sealed Receptacle, Series IV, Class H, Type 4
MIL-L-27160	Lighting, Instrument, Integral, White, General Specification for
MIL-I-83262	Indicator, Temperature, Thermocouple, Hermetically Sealed, General Specification for

STANDARDS

FEDERAL

FED-STD-595	Colors

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-461	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-704	Aircraft Electric Power Characteristics
MIL-STD-794	Part and Equipment, Procedures for Packaging and Packing of
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-831	Test Reports, Preparation of
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking and Waterproofing with Appropriate Test Methods
* MS33558	Numeral and Letter, Aircraft Instrument Dial, Standard Form of
MS33585	Pointer, Dial, Standard Design of Aircraft Instrument
MS33639	Case, Instrument, Clamp-Mounted, Aircraft
MS33678	Connector, Receptacle, Electric, Integral Mounting

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 - Standard Practice for Commercial Packaging.

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First Article. When specified, a sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.2 General specification. The requirements of MIL-I-7057 apply as requirements of this specification with the exceptions and additions specified herein. When the two specifications conflict, this specification shall govern.

3.3 Design and Construction

3.3.1 Indicator synchro. The indicator shall incorporate a synchro torque receiver to position the pointer on the indicator dial. The synchro shall be designed for continuous operation in an ambient temperature of at least 100°C while maintaining the performance specified herein. The electrical characteristics of the synchro shall conform to the applicable requirements of MIL-S-20708 and shall be such that the synchro error will not exceed 30 minutes of arc when positioned by Clifton Precision Products synchro torque transmitter, part number CGH-10-NS-9, or equal. The synchro rotor shall be designed for 115V 400-cps power input and the maximum stator voltages, as measured between any pair of stators, shall be 11.8V ±3 percent. The indicator shall be designed to operate satisfactorily when connected to an indicator conforming to MIL-I-83262.

3.4 Performance. The indicator shall be capable of meeting the following requirements:

a. Scale error not exceeding the tolerances specified in table I

TABLE I Test Tolerances

Test Point °C	Scale Error And Friction Tolerances For All Tests Except Voltage and Frequency Variation		Voltage and Frequency Variation ±°C
	Scale Error ±°C	Friction °C	
100	6	6	9
200	6	6	9
400	6	6	9
500	2	2	3
600	2	2	3
700	2	2	3
800	2	2	3
900	6	6	9
1,000	6	6	9
1,100	6	6	9
1,200	6	6	9

* b. After completion of the salt fog test, the room temperature scale errors shall not differ from the room temperature scale error readings taken before the salt fog test by more than 2°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

c. Case leakage not exceeding 0.1 micron cubic foot per hour.

* d. Operate satisfactorily within a range of temperatures from -65°C to +100°C.

e. Withstand applied vibration of 2g's at frequencies ranging from 5 to 500 cps; pointer oscillation shall not exceed 5°C double amplitude

f. Withstand pressures ranging from 30 inches Hg down to 0.309 inch Hg (approximately sea level to 100,000 feet)

g. Withstand magnetic effect when positioned 5 ±1/2 inch from a magnet which produces a field intensity of 0.17 to 0.19 oersteds at the indicator

h. Withstand frequency variations ranging from 300 to 500 cps and voltage variations from 104 to 126V

i. Withstand eight cycles of immersion in tap water maintained at 85° ±2°C and 5° ±2°C

j. Pointer cycling from 100 to 1,000°C and return to 100°C for 100,000 cycles at a rate of 15 ±2 cpm

k. Exposure to salt sea atmosphere for a period of 48 hours

l. Indication change not exceeding 2°C with a lead length change from 5 to 500 feet

m. Withstand voltage surges to 195V to 70 ±5 milliseconds

n. Position error not exceeding 2°C within the range of 500° to 800°C.

* 3.4.1 Electromagnetic interference. The indicator shall meet the electromagnetic interference requirements of MIL-STD-461 for class A1 equipment.

3.5 Case. The case shall conform to MS33639 for the 2-inch diameter case, shall be finished in durable dull black, and shall be hermetically sealed. The seal shall be accomplished in such a manner that it will not be dependent upon materials that might be affected by the action of any atmosphere to which the case may be subjected. The front edge of the case shall not extend beyond the outer surface of the cover glass by more than 1/16 inch. The case length shall be 2.75 ±0.125 inch, exclusive of the electrical receptacle. The design of the case shall be such that the internal mechanism may be removed, replaced, and the case resealed without the use of special tools unless they are approved by the procuring activity.

3.5.1 Filling medium. The filling medium shall be of at least 98 percent purity, free of dust particles, and shall contain not more than 0.006 milligram of water vapor per liter (dewpoint -65°C) at the filling pressure. The filling medium shall be a mixture of 88 to 92 percent nitrogen and the remainder helium. The absolute pressure of the filling medium in the case shall be 12 to 14.7 psi.

3.5.2 Filler tube. A tube or other facility used for evacuating and filling the case shall be provided at the rear of the case and shall be recessed beneath the level of the back-plate surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

3.5.3 Nameplate. A permanently attached nameplate shall be provided on the rear of the case. Where applicable, the information shall conform to MIL-STD-130. Metal decals shall not be used.

3.6 Dial. The indicator dial shall conform to figure 1. The diameter of the dial scale, as measured across the outer ends of the scale graduations, shall be 1.75 inches minimum. The total scale arc shall be 340° ±2°. The 100°C graduation shall be located on the horizontal centerline at the right side of the dial.

3.6.1 Dial to cover glass distance. The maximum distance between the inner surface of the cover glass and the indicator dial shall be 0.188 inch.

3.7 Pointer. The pointer shall conform substantially to MS33585-8 with deviations as required for integral lighting.

3.7.1 Pointer overswing. The pointer overswing shall be not less than 3 angular degrees beyond each end of the scale.

3.8 Lighting. The dial and pointer shall be lighted in accordance with MIL-L-27160.

3.9 Markings


3.9.1 Dimensions and colors. The dimensions and colors of the indicator shall be as follows: The colors shall conform to FED-STD-595.

	Height or Length Inch ±0.005	Width of Line or Graduation Inch ±0.005	Colors
Numerals	0.156	0.031	37875
100°C graduations	0.156	0.031	37875
50°C graduations (500° to 800°C	0.156	0.031	37875
50°C graduations (Except 500° to 800°C	0.125	0.020	37875
10°C graduations	0.125	0.020	37875
Background of dial	---	---	37038
Pointer	---	---	37875
TEMP, °C x 100	0.093	0.020	37875

3.9.2 Numerals and letters. Numerals and letters shall conform to MS33558.

* 3.10 Electrical receptacles. The indicator shall have a MS33678-14S-5P electrical receptacle on the back panel and a M25516/17-03 electrical, respectively, as shown in Figure 2. The M25516/17-03 receptacle shall be wired as the external ground for the indicator case and integral lighting circuit. The MS33678 connector shall be connected as follows:


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

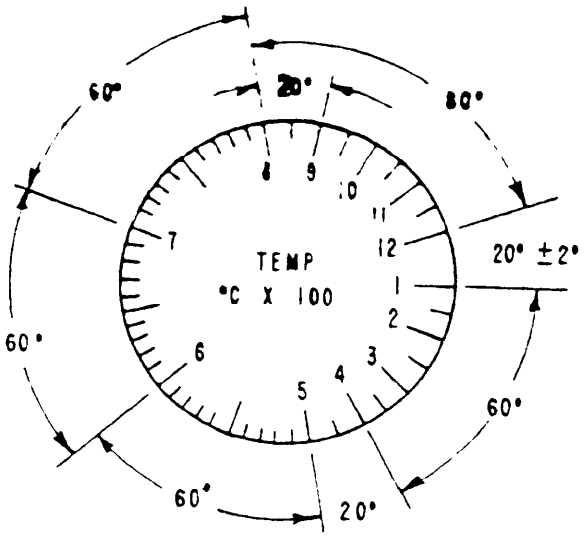

TOLERANCES: ANGLES ±0°30'

FIGURE 1. DIAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

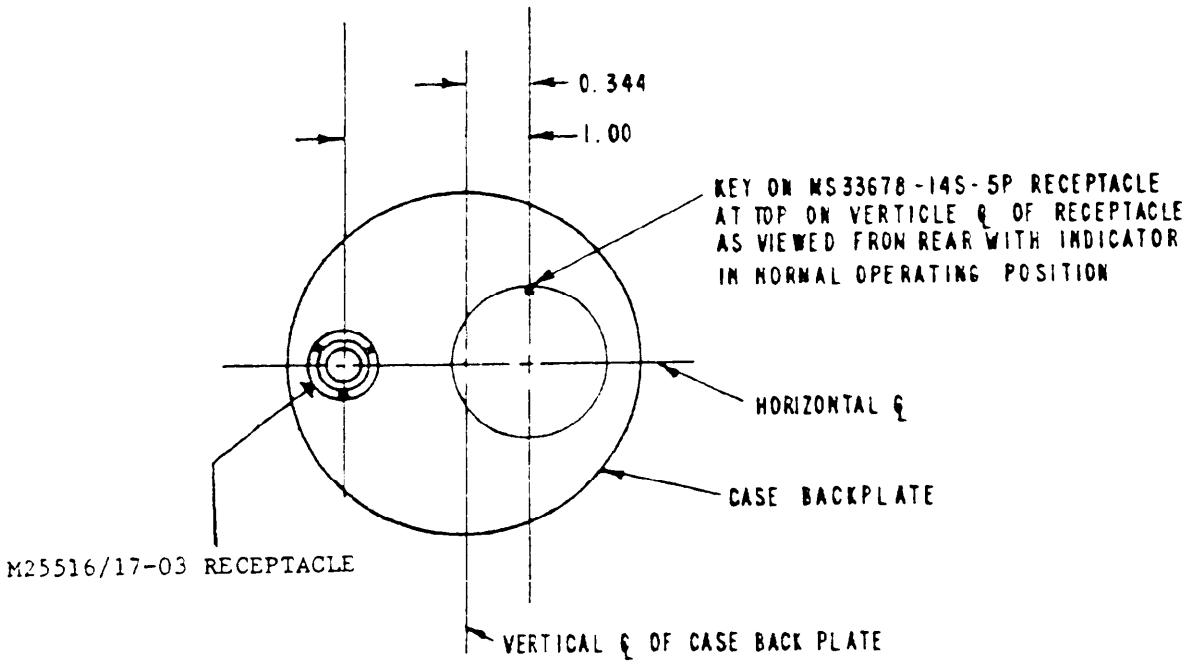

DIMENSIONS IN INCHES
TOLERANCE : ±.016

FIGURE 2. CASE BACKPLATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

MS33678 Receptacle

Pin	Connection
A	Synchro terminals S2 and R2 (input power ground)
B	Synchro terminal S3
C	Synchro terminal S1
D	Synchro terminal R1 (input power 115V, 400 Hz)
E	5V input power for integral lighting circuit.

M25516/ 17-03 Receptacle

3.11 Power. The indicator shall be designed to operate satisfactorily on 115V 400-cps power which conforms to MIL-STD-704 except that the frequency may vary from 300 to 500 cps with voltage surges to 195V as specified in section 4 of this specification.

3.12 Preliminary list of electronic parts. A preliminary list of electronic parts shall be furnished directly to the procuring activity in accordance with MIL-E-5400 prior to ordering or fabricating components for the production quantity. The parts shall conform to MIL-E-5400. The use of nonstandard parts shall be fully justified with the inclusion of test data and shall be approved by the procuring activity prior to the fabrication of the completed item. Whenever practical, the supplier shall make use of designs which permit the use of standard electronic parts.

3.13 Weight. The weight of the indicator shall not exceed 0.6 pound.

3.14 Workmanship. The indicator shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, wiring, impregnation of coils, welding, riveting, brazing, plating, painting machine, screw assemblies, and freedom of parts from burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 General specification. The inspection and testing of indicators shall be in accordance with MIL-I-7057 except as specified herein.

4.3 Test conditions

4.3.1 Attitude. Unless otherwise specified, the indicator shall be tested in the normal operating position with the plane of the dial in a vertical plane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

4.3.2 Power supply. Unless otherwise specified, the indicator shall be tested with 115 ±2V, single-phase and 400 ±5 cps a-c power and with 4.5 ±0.5V a-c or d-c power applied to the lighting circuit. Brightness and color measurements shall be made using the voltages specified in MIL-L-27160.

4.3.3 Integral lighting. The integral lighting tests shall be conducted in the sequence specified and in accordance with the methods specified in MIL-L-27160.

* 4.4 First Article Tests. The first article tests shall consist of all the tests specified under 4.6 and in MIL-L-27160.

4.4.1 Test samples. The first article test samples shall consist of three indicators representative of the production equipment. The samples shall be identified with the manufacturer's part number and such other information as required by the procuring activity.

4.4.2 Test report. After the contractor completes the first article tests, he shall prepare a test report in accordance with MIL-STD-831 and furnish three complete copies, including a reproducible copy of the report to the procuring activity.

4.5 Acceptance tests. Acceptance tests shall consist of:

a. Individual tests

b. Sampling tests

4.5.1 Individual tests. Each indicator shall be subjected to the following tests as described under 4.6:

a. Examination of product

b. Dielectric strength

c. Individual tests of MIL-L-27160

d. Electrical zero

e. Scale error and friction

f. Position error

g. Sealing.

* 4.5.2 Sampling tests. One indicator shall be selected at random from each 100 or less produced on the contract or order and subjected to the following tests as described under 4.6:

a. Individual tests

b. Sampling plan A tests of MIL-L-27160

c. Vibration

d. Low temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

e. High temperature.

f. Voltage and frequency variation.

g. Voltage surge.

4.5.2.1 Rejection and retest. When one item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected.

4.5.2.2 Individual tests may continue. For operational reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or later produced shall not be made until it is determined that items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.6 Test methods.

4.6.1 Examination of product. The indicator shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, markings, and dimensions. Prior to assembly, dials, pointers, and synchros shall be inspected as to markings, dimensions, and finishes.

4.6.2 Dielectric strength. No failure of the wire insulation or any component of the indicator shall result from this test.

4.6.3 Scale error and friction. Scale and friction errors shall not exceed the tolerances specified in table I.

4.6.4 Position error. Position error shall not exceed $2^{o}C$ within the range of 500° to $800^{o}C$.

* 4.6.5 Sealing. Use helium leak check, model 24-120A (Consolidated Engrg. Pasadena, Calif) or equivalent, to check case assembly and end cover assembly for leaks. The leak rate shall not exceed 1.04 Micro ATM-CM 3/S at a pressure differential of .8436 to 1.03 kg/cm^2.

4.6.6 Vibration. The indicator shall be subjected to a vibration test in accordance with MIL-STD-810, method 514.3, equipment class 1, mounting C, test curve A. A synchro signal shall be maintained on the stators of the indicator synchro to provide an indication of $700^{o}C$. Pointer oscillation shall not exceed $5.0^{o}C$ double amplitude. Upon completion of this test, the indicator shall be subjected to the scale error test at room temperature. The scale errors shall not exceed the tolerances specified in table I.

4.6.7 Low temperature. The scale and friction error tolerances for low temperature shall not exceed those specified in table I. The time required for the pointer to travel full scale, upon application of power from a standard synchro transmitter, shall not exceed 4 seconds. Subsequent applications of full-scale power shall be accomplished and the time required for full-scale travel shall not exceed 2 seconds after the application of power.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

4.6.8 High temperature. The scale error and friction tolerances shall not exceed those specified in table I. The test temperature shall be 100° ±2°C.

4.6.9 Voltage and frequency variation. A scale error test shall be conducted using the following values of input voltage and frequency: 104 ±1V 300 ±2 cps; 126 ±1V 300 ±2 cps; and 104 ±1V 500 ±2 cps. The errors shall not exceed the tolerances specified in table I.

4.6.9.1 Frequency cycling. The voltage shall be adjusted to 115 ±1V and the frequency shall be cycled from 320 to 480 cps in accordance with figure 3. One cycle shall consist of frequency variations from 0 to 100 seconds and return to zero through the time-frequency curve of figure 3. This procedure shall be repeated at a rate of 18 cycles per hour for 8 hours. Power shall then be removed for a minimum period of 2 hours and reapplied at 121 ±1V 320 ±2 cps for 1 hour. Immediately following this 1-hour period, the indicator shall be frequency cycled for 1 hour as indicated above with 115 ±1V applied. Any damage that would prevent compliance with the scale error test when conducted at room temperature shall be cause for rejection.

4.6.10 Voltage surge. A voltage of 108 ±1V and a frequency of 480 ±2 cps shall be applied to the indicator for 1 hour followed immediately by application of 121 ±1V 480 ±2 cps for an additional hour. At the end of the second 1-hour period, the Voltage and frequency shall be adjusted to 115 ±1V 320 ±2 cps. A voltage surge shall be applied to the power input to provide a momentary root mean square (rms) voltage of 160 ±5V and return to 115 ±1V. The duration of the surge, including rise and decay time, shall be 0.09 ±0.005 second. The frequency shall then be increased to 430 ±2 cps and a voltage surge applied to provide a momentary rms voltage of 195 ±5V and return to 115 ±1V. The duration of the surge, including rise and decay time, shall be 0.07 ±0.005 second. At the end of this test, the voltage and frequency shall be adjusted to 115 ±1V 400 ±2 cps. The scale error test shall then be conducted at room temperature. The scale errors shall not exceed those specified in table I. During this test, the indicator shall be connected to a synchro transmitter and shall be positioned at electrical zero.

4.6.11 Effect of lead length. The change in indication shall not exceed 2°C. This test may be conducted at any major or minor graduation from 510° to 790°C.

4.6.12 Low temperature exposure. The initial full-scale deflection when power is first applied at the end of the 24-hour soak at -55° ±2°C shall be timed and shall not exceed 4 seconds. Subsequent full-scale deflections from the 100°C graduation shall not require more than 2 seconds. The scale errors shall not exceed the tolerances specified in table I.

4.6.13 High temperature exposure. The scale errors shall not exceed the tolerances specified in table I. The test temperature shall be 100° ±2°C.

4.6.14 Low pressure. The low pressure test shall be conducted in accordance with MIL-STD-810, method 500.2, procedure II with the chamber pressure equivalent to an altitude of approximately 100,000 feet. The rate of pressure change throughout this test shall not exceed an average of 3 psi per second. At the end of the 1-hour period and with temperature and pressure maintained, the scale error and friction test shall be conducted. The errors shall not exceed the tolerances specified in table I. This test may be conducted concurrently with the low temperature exposure test.

Source: https://assist.dla.mil -- Downloaded: 20260-20T11:23Z
Check the source to verify that this is the current version before use.

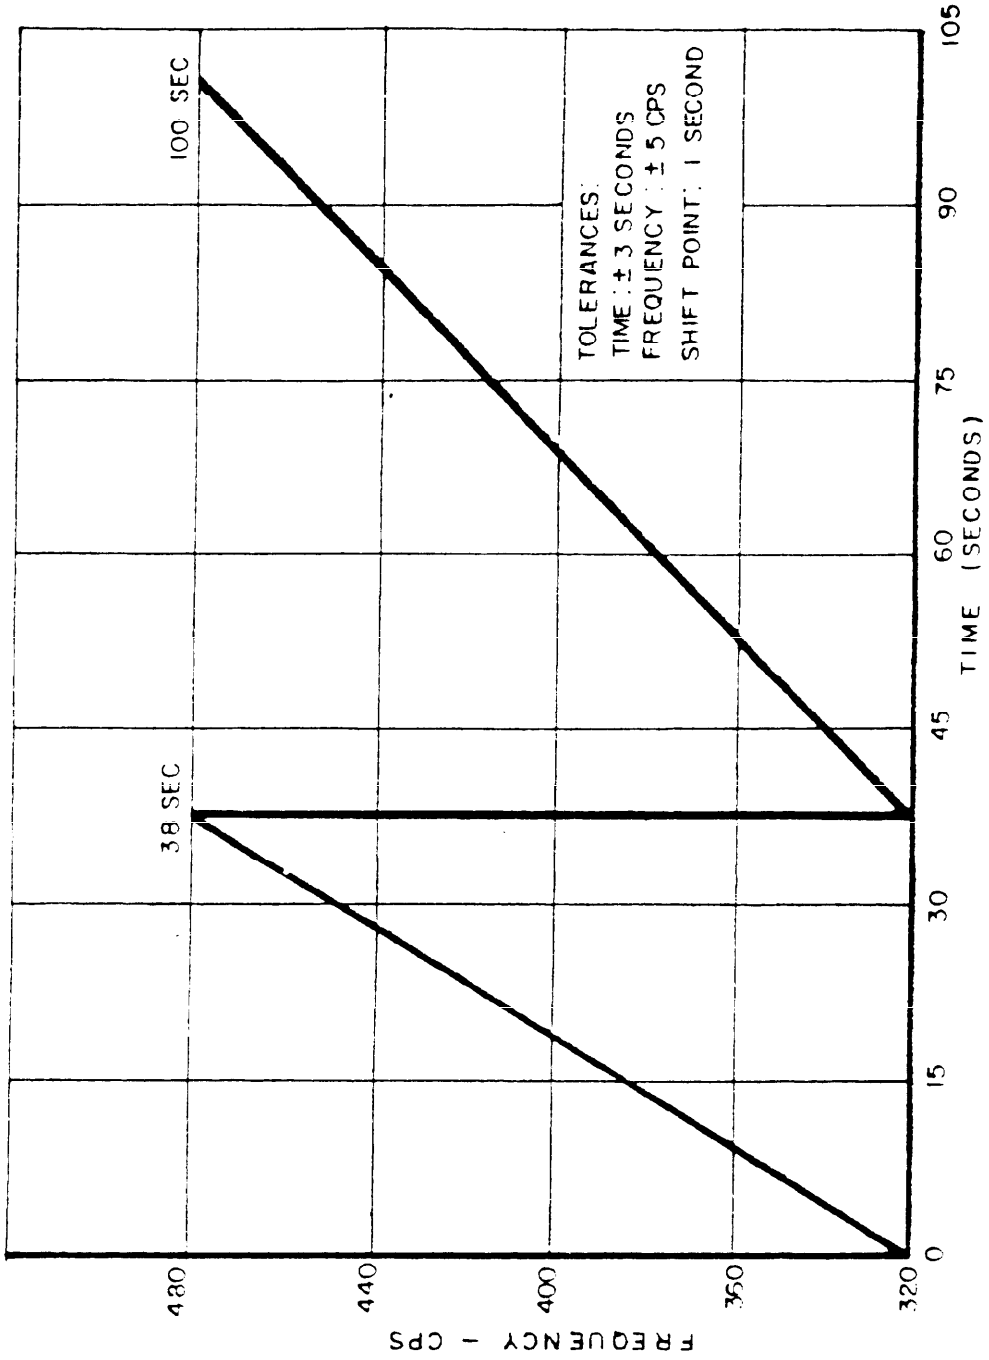


FIGURE 3. TIME-FREQUENCY CURVE

Source: https://assist.dla.mil -- Downloaded: 202610-20T11:23Z
Check the source to verify that this is the current version before use.

4.6.15 Thermal shock. During this test, fogging of the cover glass or blistering of the paint shall be cause for rejection. The leak rate for the sealing test following thermal stock shall not exceed the rate specified for the initial sealing test.

4.6.16 Salt spray. At the conclusion of the salt spray test, the indicator shall be subjected to the scale error test at room temperature. The scale errors shall not exceed the tolerances specified in Table I.

* 4.6.17 Electromagnetic interference. The electromagnetic interference test shall be conducted in accordance with MIL-STD-462. The test methods shall be as specified in MIL-STD-461 for class AI equipment.

4.6.18 Endurance test. The indicator shall be subjected to 100,000 cycles of operation at room temperature. Each cycle shall consist of pointer deflection from 100° to 1,000°C and return to 100°C at a rate of 15 $\pm$2 cpm. This test may be interrupted for weekend shutdowns. At the completion of the 100,000 cycles of operation, the indicator shall be subjected to the scale error and friction test. The scale error and friction shall not exceed 150 percent of the applicable tolerances specified in Table I.

* 5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be Level A, C or Commercial/Industrial as specified (see 6.2).

5.1.1 Level A. Indicators shall be preserved and packaged in accordance with Method IC of MIL-P-116.

5.1.2 Level C. The Level C preservation for indicator shall conform to the MIL-STD-794 requirements of this level.

5.1.3 Commercial. Commercial preservation of indicator shall be in accordance with the requirements of ASTM D 3951.

5.2 Packing. Packing shall be level A, B, C or Commercial, as specified (see 6.2).

5.2.1 Level A. The indicator preserved and packaged as specified in 5.1.1 shall be packed in a container conforming to PPP-B-601, overseas type. The closure shall be in accordance with the appendix of the container specification.

5.2.2 Level B. The indicator preserved and packaged as specified in 5.1.1 shall be packed in a container conforming to PPP-B-636, weather-resistant. The closure shall be in accordance with the appendix of the container specification.

5.2.3 Level C. The indicator preserved and packaged as specified in 5.1.2 shall be packed in a container conforming to PPP-B-636, domestic. The closure shall be in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

5.2.4 Commercial. The indicator preserved and packaged as specified in 5.1.3 shall be packed in accordance with ASTM D 3951.

5.3 Physical protection. Cushioning, blocking, bracing and waterproofing shall be in accordance with MIL-STD-1186. Waterproofing requirements for cushioning material and containers shall be waived for domestic shipments. The drop tests of MIL-STD-1186 shall be waived when the item is preserved, packaged and packed for immediate use or when the drop tests of MIL-P-116 are applicable.

5.4 Marking.

5.4.1 Level A, B & C. In addition to any special or other identification marking required by the contract (see 6.2) each unit pack intermediate and exterior container and unitized load shall be marked in accordance with MIL-STD-129.

5.4.2 Commercial. Commercial marking shall be in accordance with the requirements of ASTM D 3951.

5.5 Palletization. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized in accordance with MIL-STD-147. Palletized loads shall be uniform in size and quantities to the greatest extent possible. If the container is of a size which does not conform to any of the pallet pattern specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The indicators covered by this specification are intended for use on jet aircraft that require exhaust gas temperature indication at two panel locations for each engine, and which require a master indicator of the self-balancing potentiometer type.

6.1.1 This indicator can be used on instrument panels requiring case mounting in accordance with MS33639 by application of either an instrument mounting bezel in accordance with MIL-B-6836 or a mounting clamp in accordance with MS28042.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification

b. Type of indicator required (see 1.2)

* c. Selection of applicable levels of preservation, packaging, packing, marking and commercial/industrial (See 5.1, 5.2 and 5.4).

d. When palletization is required (see 5.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

6.3 First Article. When a first article inspection is required, the item will be tested and should be a first article sample or it may be a standard production item from the contractor's current inventory. The first article should consist of three units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests and approval of the first article.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.5 Certain provisions of this specification are the subject of international standardization agreement ASCC AIR STD 10/63. When amendment, revision, or cancellation of this specification is proposed which will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels including departmental standardization offices to change the agreement or make other appropriate accommodations.

Custodian:
Air Force - 99

Review Activities:
DLA-GS

Preparing Activity:
Air Force - 82

Project No. 6685-0756

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office 19[illegible]-360-879/5804

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

San Antonio ALC/MMEDO
Kelly AFB. Tex 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T11:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-I-22470	Indicator, Temperature, Synchro

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-20T11:23Z
Check the source to verify that this is the current version before use.