MIL-R-27208/10A
19 December 1969
SUPERSEDING
MIL-R-27208/10
13 December 1968

MILITARY SPECIFICATION

RESISTORS, VARIABLE, WIRE-WOUND

(ADJUSTMENT TYPE, LEAD-SCREW ACTUATED),

STYLE RT26

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for style RT26, adjustment type, lead-scres actuated, wire-wound, variable resistors.

2. APPLICABLE DOCUMENTS

2.1 The following document of the issue in effect on date of invitation for bids or request for proposal forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-27208 - Resistors, Variable, Wire-Wound (Adjustment Type), General Specification for.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-27208, and as specified herein.


3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure.

3.3 Power rating. The power rating shall be 1/4 watt, based on full-load operation at an ambient temperature of 85° C.


3.4 Nominal resistance value, maximum resolution, and maximum rated ac or dc working voltage. Nominal resistance values, maximum resolutions, and maximum rated ac or dc working voltages are as specified in table I.


3.5 Actual effective electrical travel. Actual effective electrical travel shall be 10 turns minimum, and 25 turns maximum.

3.6 Operating torque. Operating torque shall be a maximum of 3 ounce-inches.

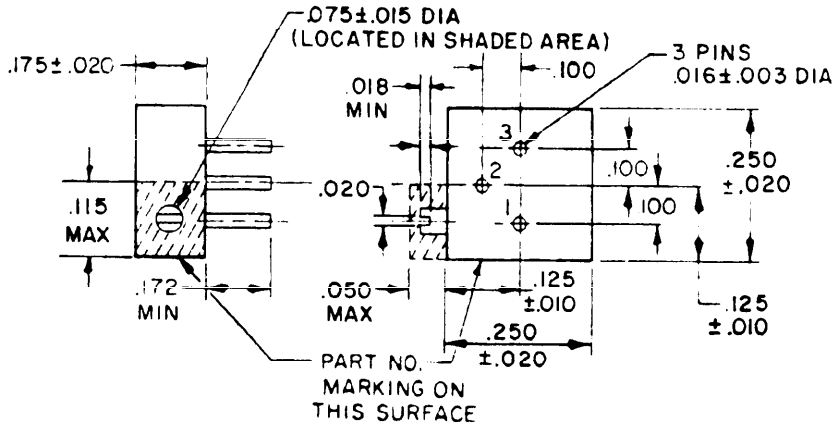

TERMINAL TYPE P



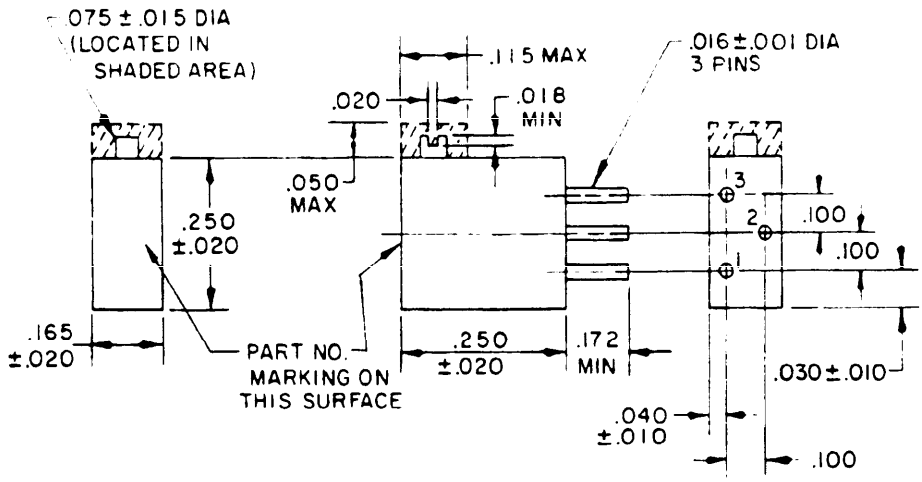

TERMINAL TYPE X

INCHES	MM
.001	.03
.003	.08
.010	.25
.015	.38
.016	.41
.018	.46
.020	.51
.030	.76
.040	1.02
.050	1.27
.075	1.91
.100	2.54
.115	2.92
.125	3.18
.165	4.19
.172	4.37
.175	4.45
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. The entire slot of the actuating screw must be above the surface of the unit.

FIGURE 1. Style RT26 resistors - Continued.

TABLE I. Nominal resistance value, maximum resolution, and maximum rated ac or dc working voltage.

Nominal resistance value	Maximum resolution 3/	Maximum rated ac or dc working voltage
(Ohms)	(Percent)	(Volts)
10	1.85	1.58
20	1.50	2.23
50	1.39	3.54
100	1.05	5.0
200	0.86	7.07
500	0.65	11.1
1,000	0.57	15.8
2,000 1/	0.44	22.3
5,000 2/	0.35	35.4

1/ Value based on the use of wire having no less than 0.001-inch nominal diameter.
2/ Value based on the use of wire having no less than 0.0008-inch nominal diameter.
3/ Maximum resolutions shown are theoretical.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-27208.

4.2 Dielectric withstanding voltage. In the dielectric withstanding voltage test, the applied potential shall be 600 volts rms at atmospheric pressure, and 250 volts rms at reduced barometric pressure.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-27208.

6. NOTES

6.1 Notes. The notes specified in MIL-R-27208 are applicable to this specification.

6.2 Weight. The maximum weight is 0.6 gram.

6.3 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, MU
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 11

Agent:
DSA-ES

(Project 5905-0693-6)