MIL-C-14637A
1 September 1982
Superseding
MIL-C-0014637 (IH)
1 August 1982

MIL-C-9828A(USAF)
13 August 1963

MILITARY SPECIFICATION

CASE, FLAG, INTERMENT

1. SCOPE

1.1 This specification covers one type of plastic flag case for use with the interment flag.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards and drawings of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-375 - Plastic Film, Flexible, Vinyl Chloride
PPP-B-621 - Boxes Wood, Nailed and Locked-Corner
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup

MILITARY

MIL-F-10884 - Fasteners, Snap

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22314, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

THE INSTITUTE OF HERALDRY

5-1-451 - Case, Flag, Interment

(Copies of specifications, standards and drawings required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figure 1 is a miniature copy of the reference drawing and is attached for information only).

3. REQUIREMENTS

3.1 First article samples. Unless otherwise specified in the contract or purchase order (see 6.2), before production is commenced three completely fabricated cases shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of the responsibility for compliance with all provisions of this specification. The first articles will be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material. The material shall conform to the referenced specifications and the requirements specified herein.

3.2.1 Vinyl film. The film for the case shall be a colorless, flexible vinyl film conforming to type I, class 1 of L-P-375, except the resistance to accelerated weathering exposure shall be 40 hours and the requirement for the following characteristics shall not apply: stiffness, extraction in soapy water, volatility and lacquer lifting. The vinyl film shall have a dull matte finish on both faces and shall be 0.012 $\pm$ .001 inch thick.

3.2.1.1 Reinforcement patches. The vinyl film for the reinforcement patches shall be as specified in 3.2.1, except the thickness shall be 0.020, $\pm$ .004, - .002 inch.

3.2.2 Snap fastener. The snap fastener shall be a soft action type conforming to style 2, finish 3, line 20 of MIL-F-10884.

3.3. Construction. The flag cases shall conform to the details and dimensions shown on drawing 5-1-451 and the requirements specified herein.

3.3.1 Case. The case shall be fabricated from vinyl specified in 3.2.1 and the front and back panels shall be heat sealed (flat seam) along two sides with a 3/8 $\pm$ 1/16 inch wide heat seal set in 1/4 inch from the edge, or the front and back panels may be heat sealed along two sides with a 1/8 inch minimum width heat seal with or without a rolled edge. The top of the back panel shall be folded upon itself to the inside with the cut edge turned under not less than 1/16 inch to form a hem and heat sealed. The finished width of the heat seal shall be 13/16 $\pm$ 1/8 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

3.3.2 Reinforcement. The entire inside edge of the front panel shall be reinforced with a 1 ± 1/8 inch wide piece of vinyl film as specified in 3.2.1 and shall be heat sealed. In addition, a reinforcement patch 1 ± 1/8 inch square shall be heat sealed at the locations of both the male and female portions of the snap fastener. Both these reinforcement patches shall be heat sealed to the inside of the panels with a smooth surface on all edges and with sufficient thickness to inhibit detachment of snap fastener.

3.3.3 Snap fastener. The snap fastener parts shall be positioned as shown in the drawing. The snap fastener shall be attached through the heat sealed reinforcement pieces, with the stud and eyelet on the back panel and the button and socket on the front panel flap.

3.3.4 Workmanship. The cases shall be clean, well made, and shall be the acceptable quality level established by this specification.

3.3.5 Label. A white paper identification label, approximately 2" x 4" shall be inserted in each plastic flag case. The label shall contain the following information:

STOCK NUMBER
NOMENCLATURE
CONTRACT NUMBER

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When a first article is required, inspection and testing of the first article shall be made on three completely finished cases for all provisions applicable to end product examination and tests.

4.3 Inspection for acceptance. Unless otherwise indicated, inspection shall be in accordance with MIL-STD-105.

4.3.1 Certification of compliance. The snap fastener may be accepted on the contractor's certification of compliance that it meets the requirements of 3.2.2.

4.3.2 End item examination. Defects found during the examination shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The lots shall be inspected in accordance with 4.3.2.3. The sample unit for these examinations shall be one completely fabricated case.

4.3.2.1 Examination for visual characteristics. Defects designated by an asterisk (*) shall be classified as major when they seriously affect appearance or serviceability and minor when they affect appearance or serviceability, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	(*)	Minor
Quality of plastic material	Not type specified.....	x	-	-
	Not uniformly colorless or not clear.....	-	-	x
	Finish not smooth dull matte on both sides.....	-	-	x
	Tear, cut, hole, crack or break.....	x	-	-
	Deep gouge or scratch.....	-	(*)	-
	Scuff, crease, blister, bubble, pimple, or pit.....	-	-	x
	Any dirt, oil, foreign matter, spot, stain or other discoloration which requires a cleaning agent for removal.....	-	-	x
	Objectionable odor.....	-	-	x
Snap fastener	Missing,loose, mismated or otherwise defective.....	-	(*)	-
	Improperly clinched resulting in cutting of the vinyl film.....	-	(*)	-
	Any sharp burrs or metal slivers which may affect serviceability.....	-	-	x
	Stud not aligned with the socket causing a noticeable bulge or twist on the flap when snapped.....	-	(*)	-
	Improperly finished.....	-	-	x
	Insecurely clinched.....	x	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	(*)	Minor
Workmanship and assembly	Open seam.....	x	-	-
	Heat seal not as specified.	-	(*)	-
	Seal not in proper location.....	-	(*)	-
	Any area of seal not continuous (or thin) resulting in weak or incomplete juncture.....	-	(*)	-
	Heat seal ends torn, rough, or not trimmed more than 1/16 inch	-	(*)	-
	Poor heat seal, resulting in inadequate fusion.....	x	-	-
	Width of heat seal along sides, not as specified...	-	-	x
	Heat seal not set in from edge as specified.....	-	-	x
	Snap fastener missing....	x	-	-
	Snap fastener has sharp or rough edge which may damage the case or cause injury in handling.....	x	-	-
	Snap fastener has defective component, failing to serve intended purpose.....	-	(*)	-
	Not reinforced as specified.....	x	-	-
	Reinforcement improperly located.....	-	(*)	-
	Any part missing or misplaced.....	x	-	-
	Any part not attached or assembled as specified.....	x	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination of case, flag interment. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.2.3 AQL's and inspections levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units, shall be as follows:

	Inspection level	AQL Major	AQL Total
For defects applicable to 4.3.2.1	II	2.5	10.0
For defects applicable to 4.3.2.2	S-3	One class	4.0

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects for closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping.
Content	Number of intermediate containers is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1. Level A. Flag case shall be folded into a rectangle approximately 10 inches by 12 inches by folding in the corners of the triangle. Ten of the folded cases shall be packaged flat in a set-up paperboard box conforming to type I, variety 1, class A, style 1 of PPP-B-676. Box closure shall be in accordance with the appendix of the container specification. The use of Scotch Brand box closing filament tape No. 898 or equal, 1/2", using a minimum of two 1/2" x 4" ("L" Clips) on each edge, may be utilized as an alternate method for effecting closure of set-up boxes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Flag cases shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Cases packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class weather resistant, type V3c or V3s of PPP-B-636. Closure shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B. Flag cases packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight in each shipping container shall not exceed the weight and size limitation of the container specification.

5.2.3 Level C. Flag cases, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Cases covered by this specification are intended to be used to contain the folded interment flag which is presented to the next of kin.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article sample is not required (see 3.1).

c. Applicable levels of packaging and packing (see 5.1 and 5.2).

CUSTODIANS:
Army - IH
Air Force - 11
Navy - NU
REVIEW ACTIVITIES:
Navy - NU, MC
Air Force - 99
DLA - CT
USER ACTIVITIES:
Air Force - 45
Navy - CG

PREPARING ACTIVITY:

The Institute of Heraldry,
United States Army

Project No. 8345-0117

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

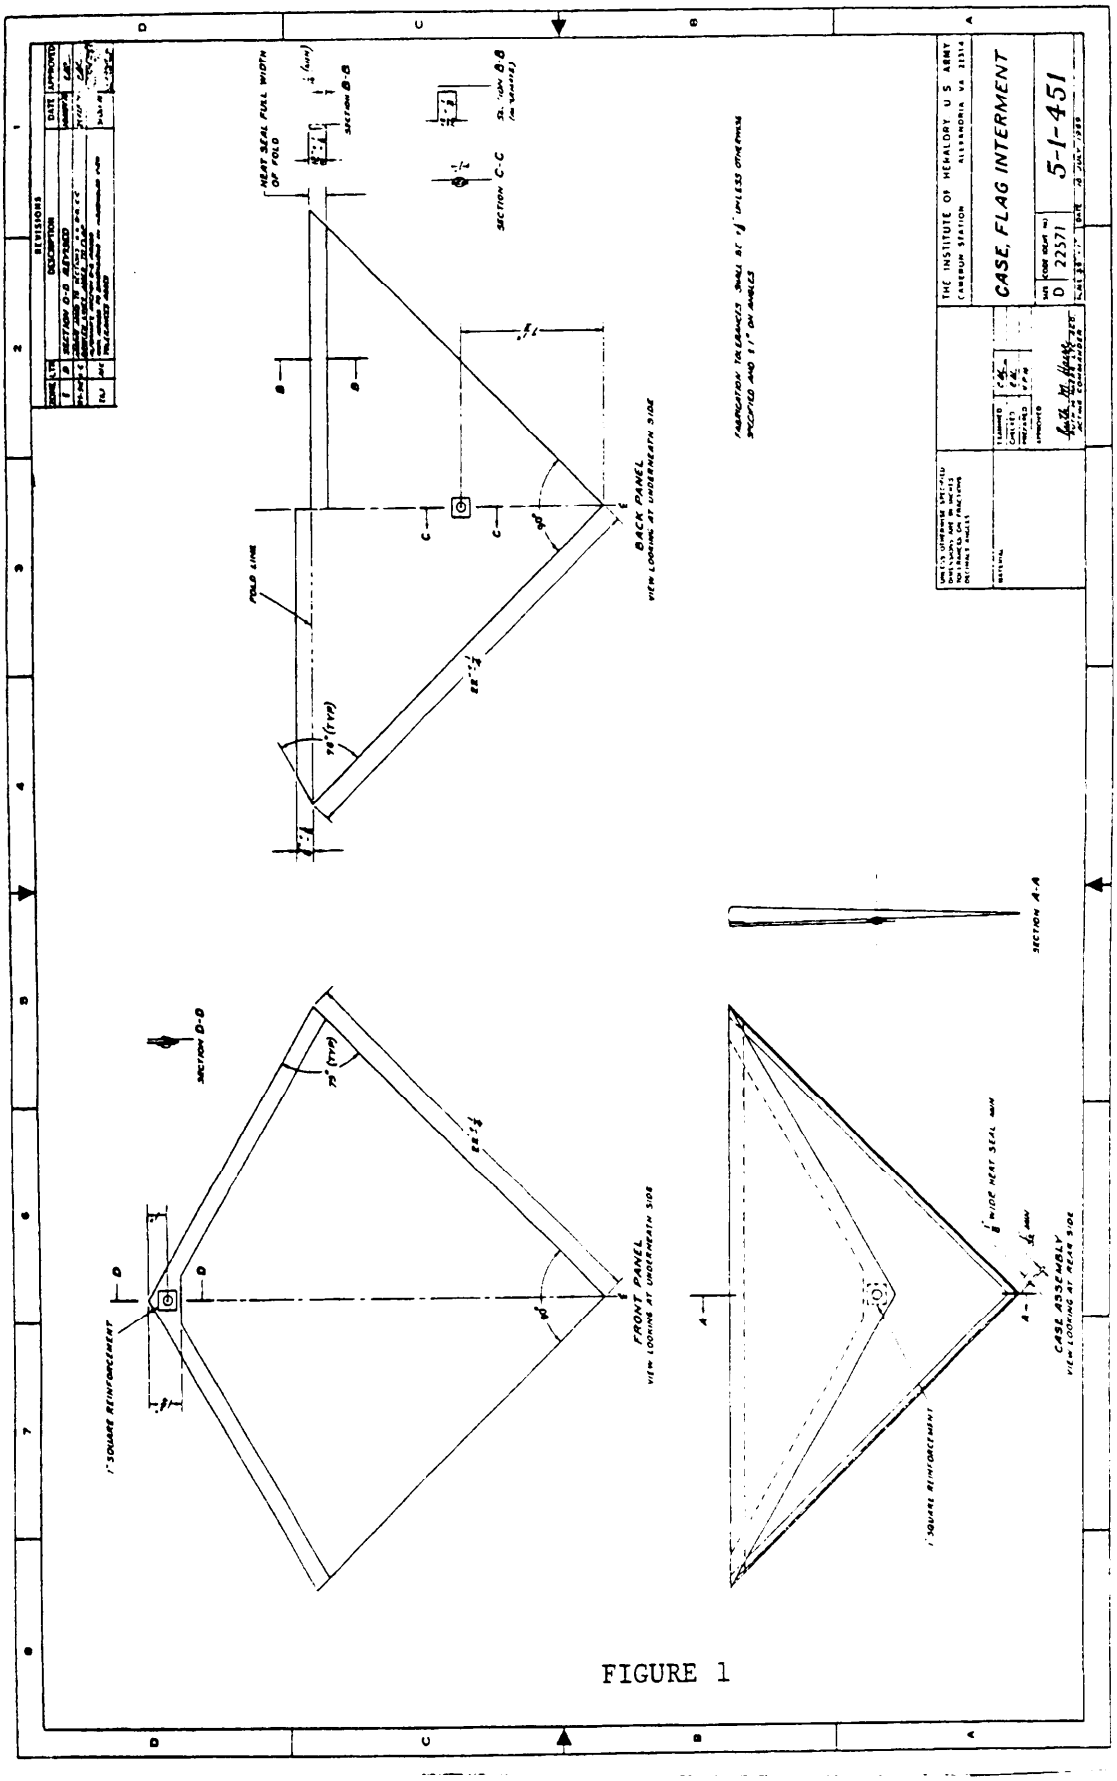


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-14637A Case, Flag, Interment

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:54Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Director
The Institute of Heraldry, US Army
Cameron Station
Alexandria, VA 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:54Z
Check the source to verify that this is the current version before use.