INCH-POUND

MIL-PRF-6106/35B
1 June 2000
SUPERSEDING
MIL-PRF-6106/35A
2 May 1983

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, BUTTON, PLUG MOUNTING TRACK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-PRF-6106.

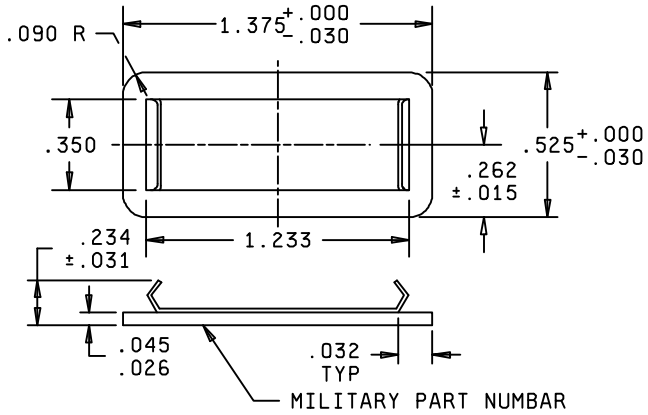

Inches	mm	Inches	mm
.015	.38	.234	5.94
.026	.66	.262	6.65
.030	.76	.350	8.89
.031	.79	.525	13.34
.032	.81	1.233	31.32
.045	1.14	1.375	34.92
.090	2.23		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.127 mm) and angles ±1/2°.
4. The plugs are intended to cover unused relay cutouts in MIL-PRF-12883/49, Sockets and accessories for Plug-In Electronic Components, (Mounting Tracks for Relays, 10 Amperes (MIL-PRF-6106, MIL-PRF-83536, and MIL-PRF-83726).
5. These plugs shall remain in tracks during all shock and vibration tests.

FIGURE 1. Outline dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Corrosion resistant.

Finish: Passivate.

Weight: .18 ounces (5 grams) maximum.

Part number: M6106/35-001.

Supersession data: M6106/35-001 supersedes M6106/35-002.

Custodians:
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-1091-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:30Z
Check the source to verify that this is the current version before use.