INCH-POUND

MIL-PRF-6106/41D
12 March 2024
SUPERSEDING
MIL-PRF-6106/41C
22 March 2012

PERFORMANCE SPECIFICATION SHEET

RELAY, ELECTROMAGNETIC, 25 AMPERES, 3PNO, WITH 2 AMPERE 1PDT AUXILIARY CONTACTS, HERMETICALLY SEALED, TYPE I

Inactive for new design after 15 November 2002. No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relays described herein shall consist of this specification and the latest issue of MIL-PRF-6106.


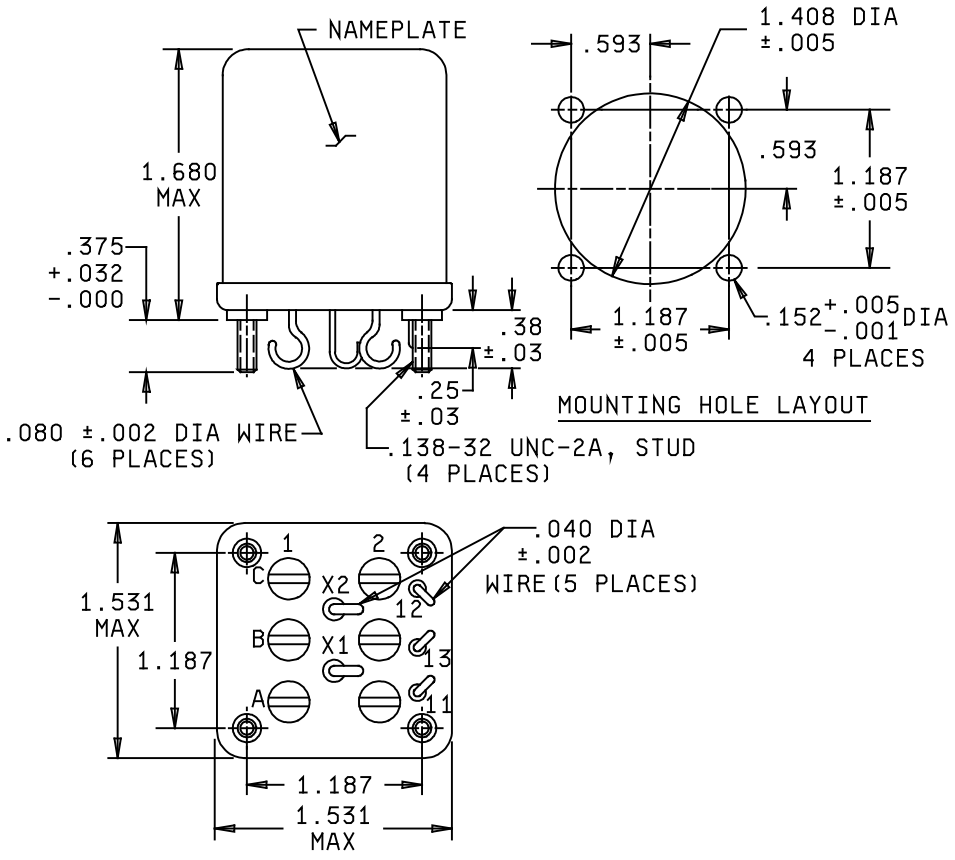


FIGURE 1. Dimensions and configurations.


AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.

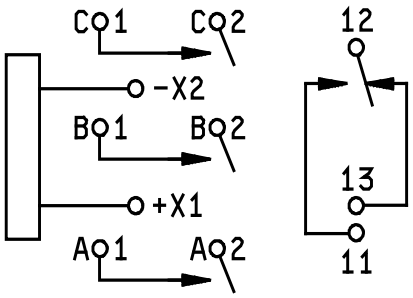

CIRCUIT DIAGRAM
DASH NUMBER -001,-002,-003
SEE NOTE 5

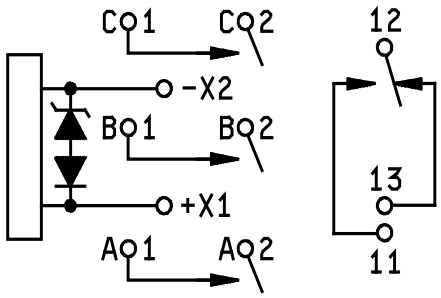

CIRCUIT DIAGRAM
DASH NUMBER -004

Inches	mm	Inches	mm
0.001	0.03	0.25	6.4
0.002	0.05	0.375	9.53
0.005	0.13	0.38	9.7
0.03	0.8	0.593	15.06
0.032	0.81	1.187	30.15
0.040	1.02	1.406	35.71
0.080	2.03	1.531	38.89
0.152	3.86	1.680	42.67

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is .010 (0.25 mm).
4. Terminal numbers need not appear on the relay header provided there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.
5. The use of diodes on ac relays is optional. Actual application must be shown on label.

FIGURE 1. Relay, outline drawing - Continued.

REQUIREMENTS:

Coil data:

Coil data: See table I.

Duty rating: Continuous.

Operational data:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.

Rated contact load: See table II.

Operate time: See table I.

Release time: See table I.

Maximum induced transient voltage (when specified): 42 V.

Physical:

Dimensions and configurations: See figure 1.

Weight (maximum): 0.44 pound (200 grams).

Terminal type: See figure 1 and table I.

Strength of terminals and mounting studs: Applicable.

Terminal solderability:

Finish: Flat black.

ENVIRONMENTAL CHARACTERISTICS:

Temperature rating: -70°C to +125°C.

Maximum altitude rating: 80,000 feet.

Shock, g-level: 50 g.

Duration: 11 ms.

Maximum duration contact opening: 2 ms.

Vibration - sinusoidal:

Operating:

G-level: 10 g.

Frequency range: 5 to 1,500 Hz.

Nonoperating:

G-level: 15 g.

Frequency range: 20 to 2,000 Hz.

Acceleration: 10 g.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.

TABLE I. Mounting, termination, and operating characteristics.

Dash no.	Coil terminal X1, X2	Coil data											Time (milliseconds-maximum)						Terminals	Mounting
		Nominal			Maximum		Max pickup voltage 1/			Hold voltage 2/	Drop out voltage 2/	Operate 3/	Release 4/	Contact bounce						
														Main		Aux				
		Volts 1/	Freq	Res ±10%	Volts	Amp	Nominal 2/	High temp test	Cont current test					NO	NC	NO	NC			
-001	DC	28	DC	---	29	0.25	18	19.5	22.5	7.0	1.5	20	10	2.0	---	4.0	4.0	Solder hook	4 Studs
-002	AC	115	400	---	122	.055	96	100	108	40	5.0	25	50	2.0	---	4.0	4.0	Solder hook	4 Studs
-003	AC	115	50/60	---	122	.06	96	100	108	40	5.0	25	50	2.0	---	4.0	4.0	Solder hook	4 Studs
-004	DC 5/	28	DC	160	29	0.25	18	19.5	22.5	7.0	1.5	20	10	2.0	---	4.0	4.0	Solder hook	4 Studs

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With nominal coil voltage.
4/ From nominal coil voltage.
5/ Suppressed dc coil: Back EMF 42 volts maximum.

TABLE II. Rated contact load (amperes per pole) case grounded.

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate footnote
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	50/60 Hz	400 Hz	60 Hz	400 Hz	50/60 Hz	400 Hz	60 HZ	
Resistive	50	25	---	2	2	25	25	2	---	25	25	---	---	---
Inductive	10	15	---	1	1	25	25	1	1	25	25	---	---	2/
Motor	50	20	---	---	---	20	12	---	---	20	12	---	---	---
Lamp	50	10	---	.5	.5	10	10	.5	---	10	10	---	---	---
Transfer load		---	---	---	---	---	---	---	---	---	---	---	---	3/
Mechanical life reduced current	100	6.3	---	.5	.5	6.3	6.3	.5	---	6.3	6.3	---	---	---
Mixed loads	Applicable per specification													

1/ Absence of value indicates relay is not rated for 3 phase applications.
2/ .7 pF, inductive.
3/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.

ELECTRICAL CHARACTERISTICS:

Insulation resistance:

Initial: 100 megohms.

After life or environmental tests: 50 megohms.

Dielectric withstanding voltage (sea level):

	Initial	After life tests
Coil to case	1,250 V rms	1,000 V rms
Auxiliary contacts	1,000 V rms	750 V rms
All other points	1,500 V rms	1,125 V rms

Dielectric withstanding voltage (altitude):

	80,000 feet
Coil to case	500 V rms
Auxiliary contacts	250 V rms
All other points	500 V rms

Maximum contact drop:

Initial: 0.150 volt.

After life test: 0.175 volt.

Overload current: 80 amperes dc, 120 amperes ac.

Rupture current: 100 amperes dc, 150 amperes ac.

RFI specification (applicable to coil currents of ac operated relays):

MIL-STD-461.

PART NUMBER: M6106/41 (plus dash number from table I).

Qualification by similarity: See MIL-PRF-6106.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.

Referenced document. In addition to MIL-PRF-6106, this document references the following:

MIL-STD-461

Custodian:
Air Force - 85
DLA-CC

Preparing activity:
DLA-CC

(Project 5945-2024-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:32Z
Check the source to verify that this is the current version before use.