
MILITARY SPECIFICATION SHEET

RELAY, ELECTROMAGNETIC, 300 AMPERES, SPST, NO, UNSEALED ENCLOSURE

This specification sheet is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-R-6106.

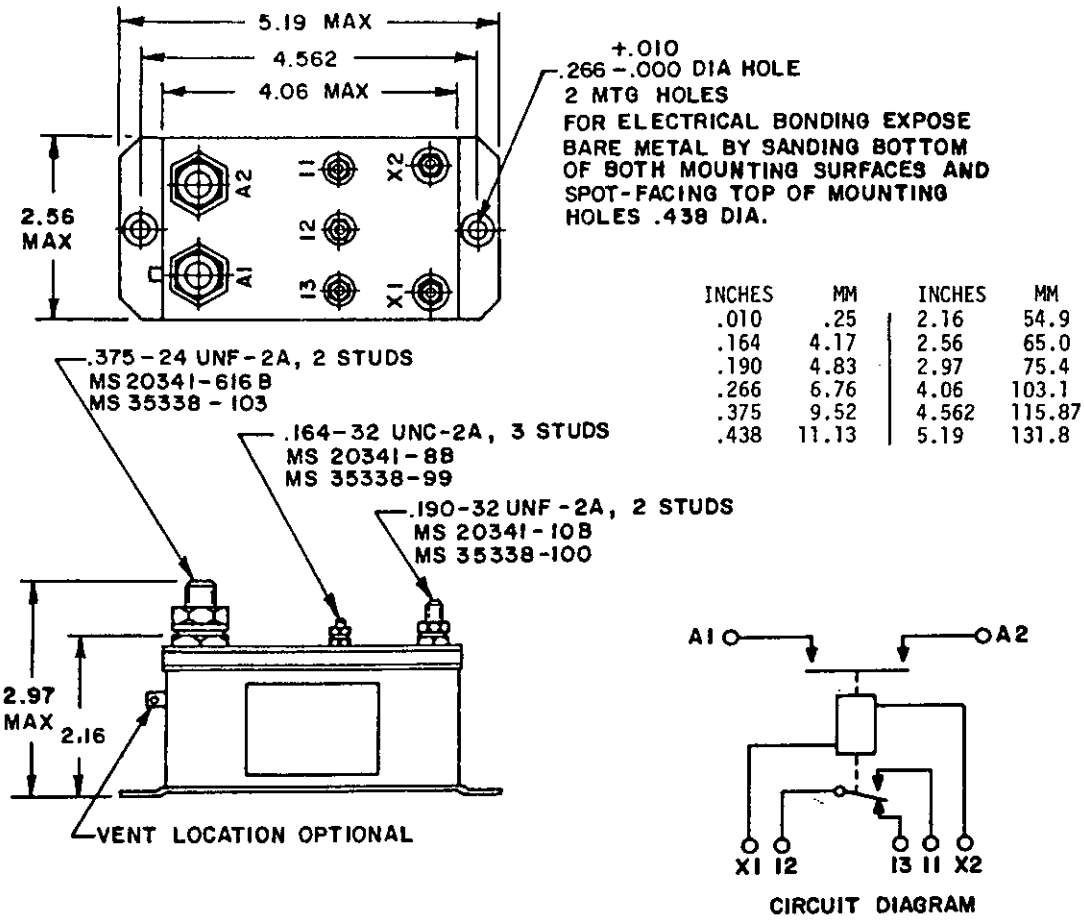

INCHES	MM	INCHES	MM
.010	.25	2.16	54.9
.164	4.17	2.56	65.0
.190	4.83	2.97	75.4
.266	6.76	4.06	103.1
.375	9.52	4.562	115.87
.438	11.13	5.19	131.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.
4. Terminal numbers need not appear on the relay header providing there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified.

FIGURE 1. Relay, outline drawing.

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 20260-17T06:29Z
Check the source to verify that this is the current version before use.

FSC 5945

TABLE I. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac 3 phase			
		Main		Aux		Main(Hz)		Aux(Hz)		Main(Hz)		Aux(Hz)	
		NO	NC	NO	NC	400	50/60	400	50/60	400	50/60	400	50/60
Resistive	50	300	---	5	5	---	---	5	---	---	---	---	---
Inductive	50	---	---	5	5	---	---	5	---	---	---	---	---
Inductive Motor	---	---	---	---	---	---	---	---	---	---	---	---	---
Lamp	---	---	---	3	3	---	---	3	---	---	---	---	---
Transfer, load	---	---	---	---	---	---	---	---	---	---	---	---	---
Mechanical life	100	---	---	---	---	---	---	---	---	---	---	---	---
Reduced current	---	---	---	---	---	---	---	---	---	---	---	---	---
Min. current		APPLICABLE PER SPECIFICATION											

REQUIREMENTS:

COIL DATA:

Nominal operating voltage: 28 V dc.

Maximum operating voltage: 29 V dc.

Pickup voltage: 16 V dc, maximum, at 25°C.

Dropout voltage: 1.5 V dc at 25°C.

(A) Hold voltage: 5.5 V dc at 25°C.

Duty: Continuous.

Coil current at 25°C: 0.40 ampere, maximum, at 28 V dc.

OPERATIONAL DATA:

Operate time: 50 milliseconds, maximum.

Dropout time: 50 milliseconds, maximum.

Contact load: See table I.

Contact bounce time: 15 milliseconds, maximum.

Contact drop: 150 millivolts, maximum, initially
175 millivolts, maximum, after life test.

Overload current: 2400 amperes.

Rupture current: 3000 amperes.

PHYSICAL DATA:

Weight: 2 pounds maximum.

Terminal strength: Applicable.

Finish: Black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:29Z
Check the source to verify that this is the current version before use.

Seal: Gasket sealed (vented).

Terminal barriers:

Base cover: Glass mat polyester per MIL-M-14.

Can: Aluminum.

ENVIRONMENTAL DATA:

Temperature range: -55° to 71°C.

Altitude: 50,000 feet.

Dielectric withstanding voltage:

	Sea level	
	Initial	After life
Coil to case	1,050 V rms	1,000 V rms
Aux contacts	1,050 V rms	1,000 V rms
All other points	1,050 V rms	1,000 V rms
	50,000 feet	
Coil to case	500 V rms	500 V rms
Aux contacts	500 V rms	500 V rms
All other points	500 V rms	500 V rms

Insulation resistance: 100 megohms minimum at 500 volts.

Vibration (sinusoidal): .06 D.A., 10 to 57 Hz, 10 G's, 57 to 500 Hz.

Shock: 25 G's for 6 milliseconds (half-sine).

Acceleration: 10 G's.

Part number: M6106/34-001.

Custodian:
Air Force - 85

Review activities:
Air Force - 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5945-F473-26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:29Z
Check the source to verify that this is the current version before use.