INCH-POUND

A-A-59554
21 DECEMBER 2004

COMMERCIAL ITEM DESCRIPTION

Corrugated Collapsible Reusable Bulk Packing System

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. SCOPE. This specification covers the minimum requirements of corrugated box and pallet system used in the Defense Depots.

.

2. CLASSIFICATION.

2.1 Classification. Corrugated collapsible reusable bulk packing system will be of the followinf styles, as specified (see 6.2).

2.1.1 Style. The styles of corrugated collapsible reusable bulk packing system are as follows:

Style A – 48”Length X 40” Width Pallet with 30 cubic feet Box
Style B – 48”Length X 40” Width Pallet with 20 cubic feet Box
Style C – 44”Length X 35” Width Pallet with 23 cubic feet Box
Style D – 40”Length X 24” Width Pallet with 12 cubic feet Box
Style E – 40”Length X 24” Width Pallet with 5 cubic feet Box
Style F – 28”Length X 20” Width Pallet with 8 cubic feet Box

2.2 Part or Identifying Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. The PIN to be used for corrugated collapsible reusable bulk packing system acquired to this CID is created as follows:

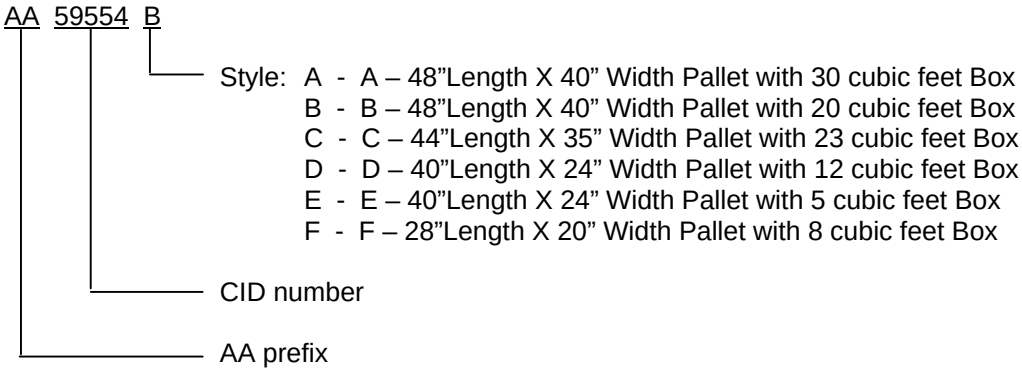

Comments, suggestions, or questions on this document should be addressed: Defense Supply Center Philadelphia, ATTN: DSCP-ITD, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or emailed to dscpg&ispeccomments@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Reclaimable Material: Bulk Pack System shall be 100% recyclable and 100% repulpable.

3.2 4 Way Entries: Full 4-way entry capability of the pallet shall be provided.

3.3 Set-up: Bulk packing system shall be designed to be both set-up and knock down, one-man operation.

3.4 Collapsibility: Box component shall collapse upon corrugated pallet. Lid will fit snuggly over collapsed unit. Unit shall have a height no greater than 8” total, length of 49” and width of 41” in a collapsed state. The pallet height shall be 4.5” maximum.

3.5 Pallet Construction: Pallet upper deck corrugated material shall be a minimum of 275 double-wall, C/B flute. Pallet lower deck (bottom surface) corrugated material shall be 2 laminated sheets of 275 lb. double wall, C/B flute. There will be 9 pallet cores each measuring 8" X 8" X 3.75" actual or 8" X 3.75" actual diameter circular. The strength of each core should be 275 lb. double wall, C/B flute. Each core will be "wrapped" 3 times to provide support and stacking strength. Cores shall be secured in place to help prevent shifting and shearing. Honeycomb and build-ups will not be acceptable. Forklift Tine positions shall be 11.75 “ – 12” width on the 48” side and 7.50” – 7.75” width on the 40” side. The forklift tine opening shall begin at 8.25” – 8.50” from each end on all sides. The height of the forklift tine opening shall be 3.75”.

3.6 Box Construction: Box corrugated material shall be a minimum of 400 lb. double-wall. Style shall be Half Slotted Container (HSC) with Regular Slotted Container (RSC) bottom. Fluting shall be C/Jumbo A. Fluting shall be vertical to the depth of the box. Manufacturer’s Joint, closure shall be stitched.

3.7 Box Lid Construction: Lid-corrugated material shall be a minimum of 400-lb. double-wall. Lid to be die-cut, pre-glued out fold 5” deep.

3.8 Components: Unit shall be of singular construction with no inner packing or liners.

3.9 Adhesive: Box, Pallet and Lid shall use waterproof Adhesive (WPA) in construction.

3.10 Box Attachment: Box shall be attached to corrugated pallet by Pressure Sensitive Hot Melt Adhesive.

3.11 Bottom Surface: The load-bearing surface in contact with the ground (pallet footprint) shall be a minimum of 40 percent of the top deck area.

3.12 Flatness. When the pallet bottom is placed on a flat surface, the pallet top shall not vary more than 0.25” from the average pallet height.

3.13 Identification Marking. The following marking shall be applied to the pallet for identification: Box Certification Stamp and Manufacturer’s CAGE Code

4. PRODUCT CONFORMANCE PROVISIONS..

4.1 Inspection. The following verifications pertain to the bulk packing system:

4.1.1 Pallet Component. Measure the pallet length and width. The length and the width of the pallet shall be within specified style plus or minus tolerance of 0.25”, otherwise shall be grounds for rejection.

4.1.2 Box Component. Measurement of the cubic feet of the fully assembled box within specified style, shall have a plus or minus tolerance of 1%, otherwise grounds for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

4.2 4-Way Entry: Pallet shall be checked for complete 4-way entry with a forklift. Forks shall be fully extended through the 40” side of the pallet. Pallet jack entry need only be 2 way. Grounds for rejection if not demonstrated.

4.3 Bottom Surface: Measure the bottom deck and calculate the surface area. Calculate the top deck area. If the total bottom deck area is less than 40 percent of the top deck area, this shall be grounds for rejection.

4.4 Forklift Tine Openings: The openings on the four pallet sides shall be measured and compared to the criteria. Any opening smaller than the criteria shall be grounds for rejection.

4.5 Height: The height of a bulk packing system shall be measured. Any bulk packing system exceeding 7” in the collapsed mode shall be grounds for rejection.

4.6 Flatness: Measure the pallet height at the four corners and at the midpoints of the perimeter. Average the eight measurements. Place the pallet on a flat surface. At the same eight points, measure the distance from the flat surface to the pallet top. No measurement shall exceed the average pallet height by more then 0.25” otherwise shall be grounds for rejection.

4.7 Squareness: Measure the two diagonals of the top deck. If the difference in the two measurements is greater than 0.75”, it shall be grounds for rejection.

4.8 Identification Marking: Visually inspect for presence of identification markings. If missing, incorrect or illegible, then shall be grounds for rejection.

4.9 Compression Test: Box compression must meet an average of 3500 lb. compression at 1.270 inches, in accordance with ASTM D4577, otherwise shall be grounds for rejection.

4.10 Board Flexural Rigidity Test: Board must meet an average flex rigidity value tested on a Composite Flex Tester of 70 N-m on combined board samples, otherwise shall be grounds for rejection.

4.11 Temperature: Pallet/box system shall be tested at minus 54 degrees Celsius (minus 65 degrees Fahrenheit) and at plus 76 degrees Celsius (plus 165 degrees Fahrenheit).

5. PACKAGING. Preservation, packing and marking shall be as specified in the contract or order.

6. NOTES.

6.1 Intended use.

6.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Style of corrugated box and pallet system shall be as specified (see 2.1).

6.3 Sources of documents.

6.3.1 Source for Government documents. Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

6.4 Definitions:

6.4.1 Pallet/Box System: A corrugated collapsible box with lid adhered to a corrugated pallet platform used for packing, storing, stacking, handling, and transporting bulk materials.

6.4.2 Recycled, Recovered, or Environmentally Preferable Materials: Recycled, recovered or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

6.4.3 Flexural Rigidity: The measure of deflection and an indicator of bulge resistance.

MILITARY INTEREST:

Custodians:
Army - AV
Navy – SA
Air Force - 99

Reviewer:
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
DLA - IS

Project 3990-0027

The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.