INCH-POUND

A-A-59554A
4 August 2009
SUPERSEDING
A-A-59554
21 December 2004

COMMERCIAL ITEM DESCRIPTION

CORRUGATED COLLAPSIBLE REUSABLE BULK PACKING SYSTEM

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. SCOPE. This specification covers the minimum requirements of corrugated box and pallet system used in the Defense Depots.

2. CLASSIFICATION.

2.1 Classification. Corrugated collapsible reusable bulk packing system will be of the following styles, entry designation, and weather resistant designation, as specified.

2.1.1 Style:
"A" – 48"Length X 40" Width Pallet with 30 cubic feet Box
"B" – 48"Length X 40" Width Pallet with 20 cubic feet Box

2.1.2 Entry designation:
"2" – Two Way Entry
"4" – Four Way Entry

2.1.3 Weather resistant designation:
"W" – Weather Resistant Material
" " – Non-Weather Resistant Material

2.2 Part or Identifying Number (PIN): The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a PIN for CID A-A-59554.

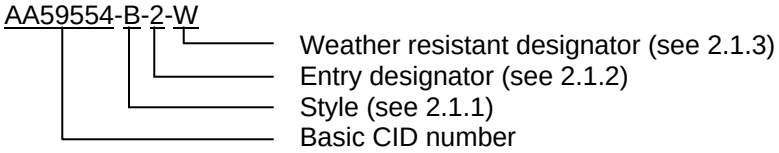

48"Length X 40" Width Pallet with 20 cubic feet Box - Two Way Entry – Weather Resistant

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&inspecomments@dla.mil . Since contact information can change, you may want to verify the currency of this address information using ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Reclaimable material. Bulk packing system shall be 100% recyclable.

3.2 Set-up. Bulk packing system shall be designed to be both set-up and knock down, one-man operation.

3.3 Collapsibility. Box component shall collapse upon corrugated pallet. Lid will fit snuggly over collapsed unit. Unit shall have a height no greater than 12'' total. The pallet height shall be no greater than 6" maximum.

3.4 Pallet construction. Pallet upper deck corrugated material shall be a minimum of 275 lb/sq. inch (psi) double-wall. Pallet lower deck (bottom surface) corrugated material shall be 2 laminated sheets of 275 lb/msf double wall. Pallets shall have either 9 cores or 3 stringers minimum. Cores and stringers shall be wrapped to in place to help secure and prevent shifting and shearing. Forklift tine positions shall be a minimum of 7.50" and a maximum of 12". The forklift tine opening shall begin at 8.25" – 8.50" from each end on all sides. The height of the forklift tine opening shall be 3" minimum.

3.5 Box construction. Box corrugated material shall be a minimum of 400 psi double-wall. Style shall be Half Slotted Container (HSC) with Regular Slotted Container (RSC) bottom. Fluting shall be vertical to the depth of the box. Box maximum capacity shall be 2500 pounds.

3.6 Weather resistant material. When specified, single face flute shall include a water resistant resin to enhance and ensure flute formation and bonding. All water resistant pallets shall be assembled using a high performance water based adhesive product, developed to bond paper.

3.7 Adhesive. Box, pallet and lid shall use waterproof adhesive (WPA) in construction.

3.8 Box attachment. Box shall be attached to corrugated pallet. Pallet and box shall be of singular construction.

3.9 Bottom surface. The load-bearing surface in contact with the ground (pallet footprint) shall be a minimum of 40 percent of the top deck area.

3.10 Flatness. When the pallet bottom is placed on a flat surface, the pallet top shall not vary more than 0.25" from the average pallet height.

3.11 Box lid material. Lid-corrugated material shall be a minimum of 400 psi double-wall.

3.12 Identification marking. The following marking shall be applied to the pallet for identification: Box certification stamp and manufacturer's CAGE code.

4. PRODUCT CONFORMANCE PROVISION.

4.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

4.2 Inspection. The bulk packing system shall be inspected as specified below to determine compliance with all requirements specified in this CID.

4.2.1 Pallet component. Measure the pallet length and width. The length and the width of the pallet shall be within specified style plus or minus tolerance of 0.25".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

4.2.2 Box component. Measurement of the cubic feet of the fully assembled box within specified style shall have a plus or minus tolerance of 1%.

4.2.3 Entry. Forks shall be fully extended through the shorter side of the pallet. Pallet jack entry need only be 2 way.

4.2.4 Bottom surface. Measure the bottom deck and calculate 40 percent of the top deck area.

4.2.5 Forklift tine openings: The openings on the four pallet sides shall be measured and shall be within as specified (see 3.4).

4.2.6 Height. The height of a bulk packing system shall be measured not to exceed 12” in the collapsed mode.

4.2.7 Flatness. Measure the pallet height at the four corners and at the midpoints of the perimeter. Average the eight measurements. Place the pallet on a flat surface. At the same eight points, measure the distance from the flat surface to the pallet top. No measurement shall exceed the average pallet height by more then 0.25”.

4.2.8 Squareness. Measure the two diagonals of the top deck. The differences of the two measurements shall not be greater than 0.75”.

4.2.9 Identification marking. Visually inspect for presence of identification markings.

4.2.10 Compression test. Box compression shall meet an average of 3500 lb. compression at 1.270 inches, in accordance with ASTM D4577 (Section 7.2 no fewer than 5 samples).

4.2.11 Board flexural rigidity test. Board shall meet an average flex rigidity value tested on a Composite Flex Tester of 70 N-m on combined board samples (no fewer than 5 samples).

4.2.12 Resiliency. Bulk packing system shall be capable of withstanding automatic banding equipment and moving through an automated conveyor system.

5. PACKAGING. Preservation, packing and marking shall be as specified in the contract or order.

6. NOTES.

6.1 Ordering data. The contract or order should specify the following:
a. CID document number, revision, and CID PIN.
b. Packaging requirements.

6.2 Styles C,D, E, and F are deleted under this revision without replacement.

6.3 Sources of documents.

6.3.1 ASTM International standards. ASTM standards are available online at www.astm.org or from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM D4577 - Standard Test Method for Compression Resistance of a Container Under Constant Load

6.4 Key words.

Box
Lid
Pallet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Military interests:

Custodians:
Army – AV
Navy – SA
Air Force – 99

Preparing activity:
DLA - IS

(Project 3990-2009-002)

Review activity:
Air Force - 84

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.