INCH-POUND
A-A-59555
23 June 2000
SUPERSEDING
MIL-P-55149/7C
17 February 1972

COMMERCIAL ITEM DESCRIPTION

POST, BINDING, ELECTRICAL, WATERPROOF (INSULATED), TOP ENTRY

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for an insulated electrical binding post to be used as a wiring termination on terminal boards and test set panels.

2. CLASSIFICATION. The electrical binding post shall be classified and identified by type in accordance with the characteristics specified in table I. The selected product to be supplied shall be specified in the acquisition order (see 7.4(b)).

TABLE I. Electrical binding post (waterproof) dimensions.

Type	Insulation color	Dimensions					
		A[1] (max)	B[1] (max)	C[1] (max dia.)	D[1] Thread	E[1] (±.001)	F[1] (±.002)
I	Olive drab (or as specified)	1.612	1.072	.400	8-36 UNF-2A	.241	.272

[1] See figure 1.

3. SALIENT CHARACTERISTICS

3.1 Components. The electrical binding post shall be similar to the one shown in figure 1. The product shall consist of the binding post, insulated spring-loaded cap, insulated mounting washers, o-ring, and all mounting hardware.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

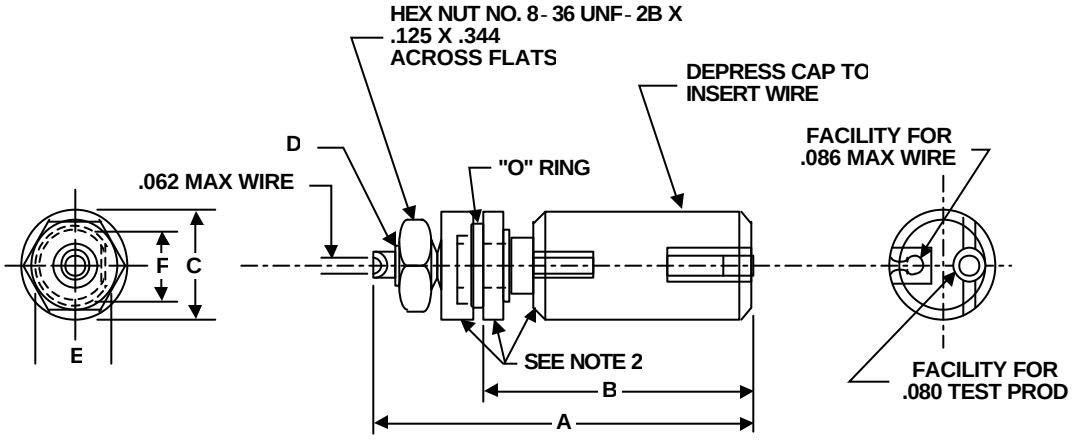

FIGURE 1. Binding post configuration.

Notes:
1. The figure depicts only general characteristics and is not intended to limit specific manufacturing processes.
2. This is the insulated portion.
3. Dimensions (listed in table I) are in inches. Tolerance is ±0.015 inch unless otherwise shown.

3.2 Materials.

3.2.1 Metal. Unless specified otherwise in the acquisition order (see 7.4(c)), the current-carrying portions of the binding post shall be brass conforming to the requirements of the American Society for Testing and Materials (ASTM) B 16, "Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines" (DoD adopted).

3.2.2 Finish. Unless specified otherwise in the acquisition order (see 7.4(d)), metal portions of the binding post shall be nickel plated in accordance with the latest revision of QQ-N-290, "Nickel Plating (Electrodeposited)".

3.2.2.1 Unless otherwise specified in the acquisition order (see 7.4(e)), the solder terminal end shall be hot solder dipped/coated.

3.2.3 Insulation. The material used for the insulated portions of the binding post shall be specified in the acquisition order (see 7.4(f)). The insulated parts of an individual binding post shall all be of the same color, and unless otherwise specified in the acquisition order (see 7.4(g)), the color shall be olive drab.

3.3 Cap and cap spring. The cap shall be insulated and non-removable. The strength of the cap spring shall permit the cap to be depressed using a force of 3 to 5 pounds.

3.4 Non-turn feature. Unless specified otherwise in the acquisition order (see 7.4(h)), the non-turn feature shall be a flatted boss on the molded-on insulated piece configured to fit the typical mounting hole as shown in figure 2 and oriented with respect to the wire and probe openings as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

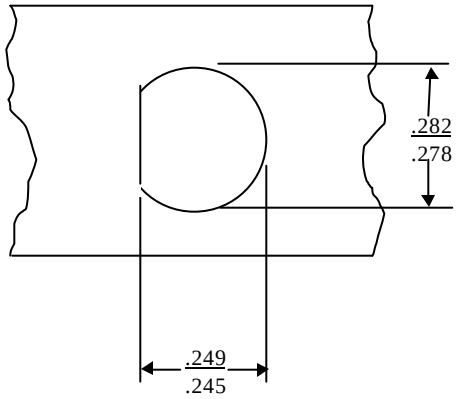

FIGURE 2. Typical mounting hole.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(i)).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AA59555 – X

Dash number (1 = Type I (see table I))

CID number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.2 Sources of documents.

7.2.1 Government documents. Copies of the FAR and federal specifications may be obtained from the U.S. Government Printing Office, Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-9328. Electronic copies of federal specifications may be obtained from http://astimage.daps.dla.mil/quicksearch/.

7.2 2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 National stock number (NSN). The NSN listed below is assigned for the listed product type (see table I). Other NSNs may also correspond with this document.

NSN	Type
5940-00-883-8376	I

7.4 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Product classification (type) (see table I)
c. Current-carrying material, if different (see 3.2.1)
d. Binding post finish, if different (see 3.2.2)
e. Solder terminal end finish, if different (see 3.2.2.1)
f. Insulation material (see 3.2.3)
g. Cap and insulated mounting washer color, if different (see 3.2.3)
h. Non-turn feature, if different (see 3.4)
i. Packaging requirements (see 6.1)

7.5 Substitution data. See table II.

TABLE II. Substitution data.

PIN number in A-A-59555	Part number in MIL-P-55149/7C
AA59555 - 1	PB07FA01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - EC
Air Force - 11

Reviewer:
Air Force - 99

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS

(Project 5940-1396)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.