INCH-POUND

A-A-59555A
22 March 2007
SUPERSEDING
A-A-59555
23 June 2000

COMMERCIAL ITEM DESCRIPTION

POST, BINDING, ELECTRICAL, WATERPROOF (INSULATED), TOP ENTRY

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers an insulated electrical binding post used as a wiring termination on terminal boards and test set panels.

2. CLASSIFICATION. The electrical binding post shall be classified and identified by the type in accordance with the characteristics specified in table I. The selected product to be supplied shall be specified in the acquisition order (see 7.3(b)).

TABLE I. Electrical binding post (waterproof) dimensions.

Type	Insulation color	Dimensions					
		A[1] (max.)	B[1] (max.)	C[1] (max. dia.)	D[1] Thread	E[1] (±0.001)	F[1] (±0.002)
I	Olive drab (or as specified)	1.612	1.072	0.400	8-36 UNF-2A	0.241	0.272


[1]See figure 1.

3. SALIENT CHARACTERISTICS

3.1 Components. The electrical binding post shall be similar to the one shown in figure 1. The product shall consist of the binding post, insulated spring-loaded cap, insulated mounting washers, o-ring, and all mounting hardware.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

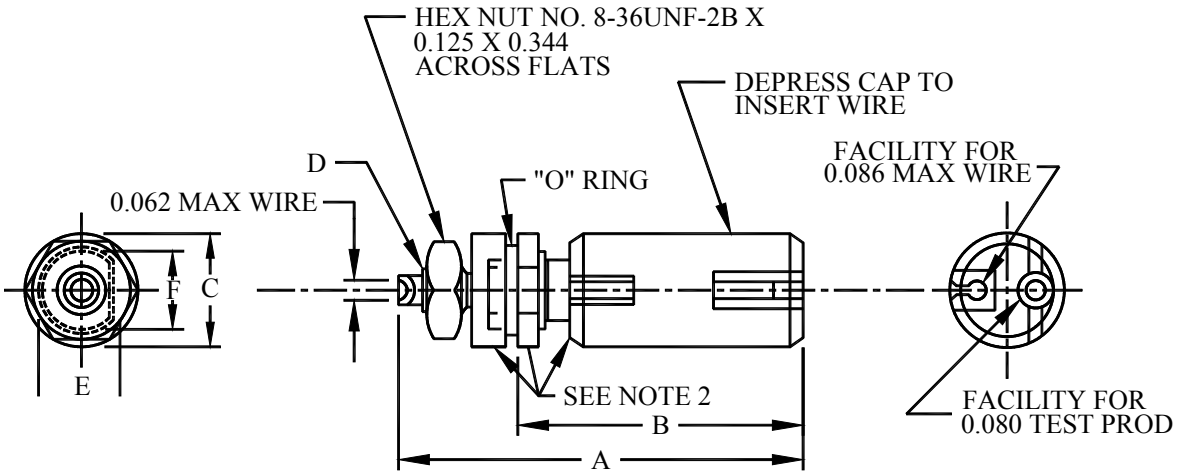

NOTES:
1. The figure depicts only general characteristics and is not intended to limit specific manufacturing processes.
2. This is the insulated portion.
3. Dimensions (listed in table I) are in inches. Tolerance is ±0.015 inch unless otherwise shown.

FIGURE 1. Binding post configuration.

3.2 Materials.

3.2.1 Metal. Unless specified otherwise in the acquisition order (see 7.3(c)), the current-carrying portions of the binding post shall be brass conforming to the requirements of ASTM B16/B 16M, "Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines".

3.2.2 Finish. Unless otherwise specified in the acquisition order (see 7.3(d)), metal portions of the binding post shall be nickel plated in accordance with SAE AMS-QQ-N-290, "Nickel Plating (Electrodeposited)".

3.2.2.1 Solder coating. Unless otherwise specified in the acquisition order (see 7.3(e)), the solder terminal end shall be hot solder dipped/coated.

3.2.3 Insulation. The material used for the insulated portions of the binding post shall be specified in the acquisition order (see 7.3(f)). The insulated parts of an individual binding post shall all be of the same color and unless otherwise specified in the acquisition order (see 7.3(g)), the color shall be olive drab.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.3 Cap and cap spring. The cap shall be insulated and non-removable. The strength of the cap spring shall permit the cap to be depressed using a force of 3 to 5 pounds.

3.4 Non-turn feature. Unless otherwise specified in the acquisition order (see 7.3(h)), the non-turn feature shall be a flattened boss on the molded-on insulated piece configured to fit the typical mounting hole as shown in figure 2 and oriented with respect to the wire and probe openings as shown in figure 1.

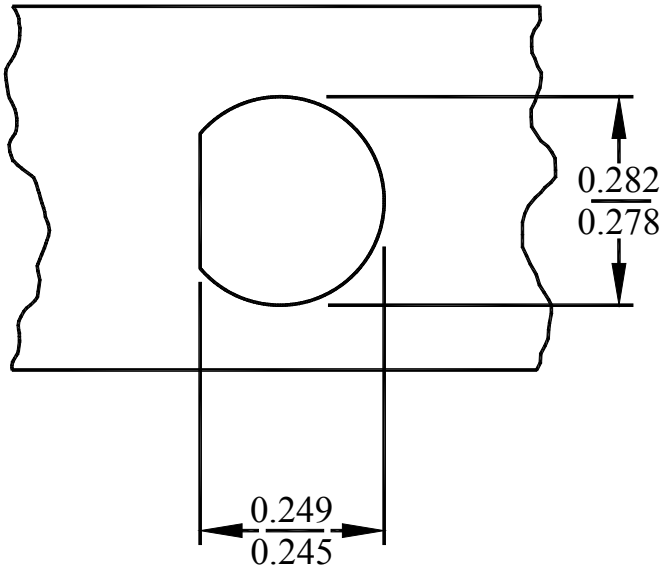


FIGURE 2. Typical mounting hole.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(i)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

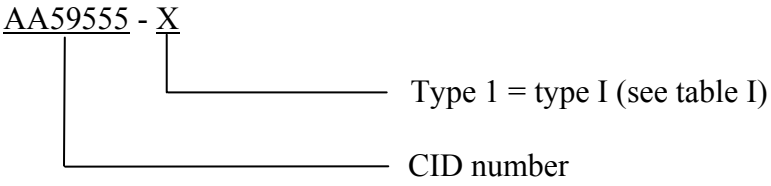

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

7.2.3 SAE standards. Copies of SAE standards may be obtained from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001. Electronic copies of SAE standards may be obtained from http://www.sae.org/.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type required (see table I).
c. Current-carrying material, if different (see 3.2.1).
d. Binding post finish, if different (see 3.2.2).
e. Solder terminal end finish, if different (see 3.2.2.1).
f. Insulation material (see 3.2.3).
g. Cap and insulated mounting washer color, if different (see 3.2.3).
h. Non-turn feature, if different (see 3.4).
i. Preservation, Packing, and marking requirements (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.4 Subject term (key word) listing.

spring-loaded cap
terminal board
test set panels
wiring
termination

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - EC
Air Force - 11

Review Activity:
Air Force - 99

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
DLA - GS2

(Project 5940-2006-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.