INCH-POUND
A-A-59557
23 June 2000
SUPERSEDING
MS51925B
22 January 1971

COMMERCIAL ITEM DESCRIPTION

RING, DEE - MEDIUM

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for dee rings to be used on various equipage items.

2. CLASSIFICATION. The dee rings shall all conform to a single type and shall be identified in accordance with the material classes listed in table I and the sizes listed in table II.

2.1 Material class. The dee ring material class shall be one of the coded options listed in table I and shall be specified in the acquisition order (see 7.5(b)).

TABLE I. Material classes.

Code	Class	Material type
A	2	Steel wire
	3	Malleable iron
B	5	Molding plastic (nylon) rigid

2.2 Size. The dee ring dimensions shall conform to the requirements specified in table II for each of the coded dee ring sizes. The listed dimensions refer to the characteristics of the dee ring drawing shown as figure 1. For unlisted dee ring sizes, the dimensional requirements shall be specified in the acquisition order (see 7.5.(c)).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 5365

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

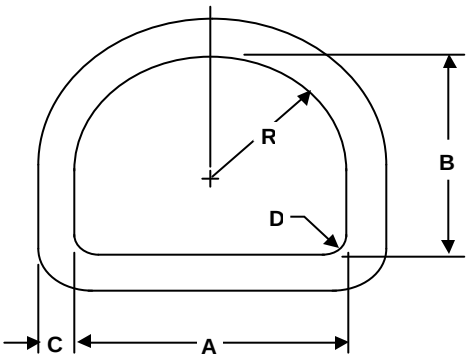

FIGURE 1. Dee ring.

TABLE II. Dimensional requirements (dimensions in inches).

Dee ring size code	Strap size	A ±.02	B ±.03	C DIA ±.005 *	D ±.02	R ±.03
1	5/8	.62	.50	.048	.06	.31
2	3/4	.75	.62	.048	.06	.38
3	7/8	.88	.75	.162	.09	.44
4	1	1.00	.88	.192	.09	.50
5	1-1/4	1.25	1.00	.192	.12	.62
6	1-1/2	1.50	1.25	.243	.12	.75
7	1-3/4	1.75	1.50	.243	.12	.88

* Tolerance on "C" diameter of malleable iron rings shall be ±.015.

3. SALIENT CHARACTERISTICS

3.1 Materials. The dee ring materials specified shall conform to applicable specifications and requirements specified hereinafter. Commercial tolerances apply to wire diameters. The use of recycled materials is encouraged (see 3.1.3).

3.1.1 Steel wire. Steel wire shall conform to steel Number 1006 through 1020, finish 1, annealed in process, as specified in the American Society for Testing and Materials (ASTM) A 853, "Standard Specification for Steel Wire, Carbon, for General Use" (DoD adopted).

3.1.2 Malleable iron. Malleable iron castings shall conform to Grade 35018 of ASTM A 47/A 47M, "Standard Specification for Ferritic Malleable Iron Castings" (DoD adopted).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.1.3 Plastic, nylon. The plastic dee rings shall be molded from virgin nylon conforming to PA 181, polyamide nylon, Group 1 (66 nylon), Class 8 (weather stabilized), Grade 1 of ASTM D 4066, "Standard Classification System for Nylon Injection and Extrusion Materials (PA)" (DoD adopted). Clean unburned plastic material in the form of imperfect parts, sprues, runners or other scrap of the same composition as the virgin material, and produced in the molding or finishing operation, may be reground and mixed with the virgin material specified. When reground is mixed with the virgin material, the reground shall not exceed a level of 25 percent by weight of the blended mixture.

3.2 Protective finish. The finished rings shall be free from corrosion, dirt, discoloration, and areas of no finish. Finishes shall be as follows:

3.2.1 Class 2 and Class 3 rings. All Class 2 and Class 3 rings shall be finished with zinc-plate and shall conform to type II, SC2 of ASTM B 633, "Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel" (DoD adopted), followed by baking enamel. The enamel shall conform to 3.3.

3.2.2 Class 5 rings. The surfaces of the Class 5 dee rings shall have a smooth and lusterless or semi-gloss finish. All surfaces shall be free of dirt, dust, and foreign matter inclusion. The finish shall be produced from a die which has the cavity surfaces finished in a vapor blast, water hone, or similar satin finish, and not result from the application of any protective coating lacquers or other materials. The resultant surface gloss shall not exceed that of semi-gloss color black chip number 27038 of FED-STD-595, "Colors Used in Government Procurement", by visual comparison.

3.3 Enamel. The enamel shall be semi-gloss alkyd enamel conforming to A-A-2962, "Enamel, Alkyd, Exterior, Solvent Based, Low VOC".

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Preservation, packing, and marking. Rings shall be preserved, packed, and marked in accordance with ASTM D 3951, "Standard Practice for Commercial Packaging" (DoD adopted), unless otherwise specified in the acquisition order (see 7.5(d)). Each interior package and shipping container shall be marked with the quantity of rings contained therein.

7. NOTES

7.1 Sources of documents.

7.1.1 Government documents. Copies of the FAR and federal standards may be obtained from the U.S. Government Printing Office, Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-9328. Electronic copies of federal standards may be obtained from http://astimage.daps.dla.mil/quicksearch/.

7.1.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.2 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

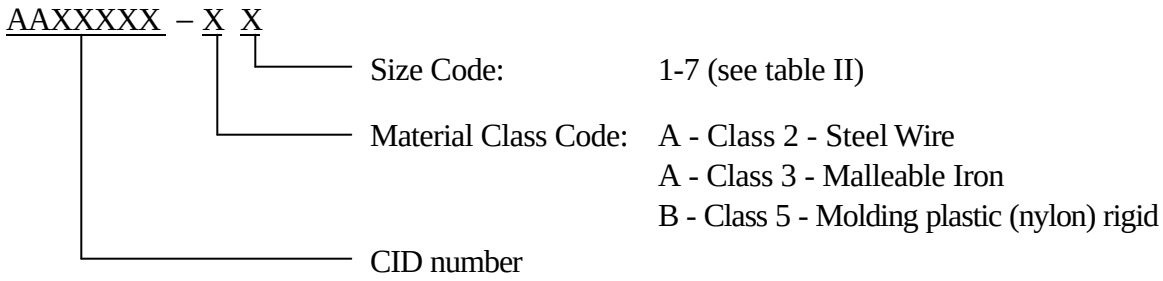

7.3 National stock number (NSN). The NSNs listed in table III are assigned for the listed product sizes (see table II). Other NSNs may also correspond with this document.

TABLE III. Assigned NSNs.

Size code	NSN
1	5365-01-031-9674
2	5365-00-202-0228
4	5365-00-127-7449
6	5365-00-823-4836

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.4 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products that meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Albest Metal Stamping Corporation
One Kent Avenue
Brooklyn, NY 11211-1014

Columbia Nut and Bolt Corporation
50 Graphic Place
Moonachie, NJ 07074-1106

Dialogic Corporation
3161 State Road
Bensalem, PA 19020

Kampi Components Company Inc.
210 Rt. 13
Bristol, PA 19007-0721

7.5 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Dee ring material class (see 2.1)
c. Dee ring size, if different specify dimensional requirements (see 2.2)
d. Preservation, packing, and marking requirements, if different (see 6.1)

7.6 Cross-reference table. Table IV is a cross-reference of the part number used previously under MS51925B, to the corresponding part number applicable under this CID.

TABLE IV. Cross reference.

CID part number	MS51925B part number
AA59557-A1	MS51925-1
AA59557-A2	MS51925-2
AA59557-A3	MS51925-3
AA59557-A4	MS51925-4
AA59557-A5	MS51925-5
AA59557-A6	MS51925-6
AA59557-B1	MS51925-15
AA59557-B2	MS51925-16
AA59557-B3	MS51925-17
AA59557-B4	MS51925-18
AA59557-B5	MS51925-19
AA59557-B6	MS51925-20
AA59557-B7	MS51925-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army - AR

Reviewers:
Army - AT, MI

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS

(Project 5365-0015)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.