INCH-POUND

A-A-59559A
22 March 2007
SUPERSEDING
A-A-59559
23 June 2000

COMMERCIAL ITEM DESCRIPTION

POST, BINDING, ELECTRICAL, WATERPROOF (INSULATED), DUAL O-RING SEAL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers an insulated electrical binding post used as a wiring termination on terminal boards and test set panels.

2. CLASSIFICATION. The electrical binding post shall be classified and identified by the types in accordance with the characteristics specified in table I. The selected types of products to be supplied shall be specified in the acquisition order (see 7.3(b)).

TABLE I. Electrical binding post dimensions.

Type	Cap color	Dimensions		
		A[1]	B[1] (±0.015)	C[1] (+0.016/-0.049)
I	Black	2.000 (max.) 1.950 (min.)	1.000	0.719
II	Red	2.000 (max.) 1.950 (min.)	1.000	0.719


[1]See figure 1.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Components. The electrical binding post shall be similar to the one shown in figure 1. The product shall consist of the binding post, insulated spring-loaded cap and mounting washers, o-rings, and all mounting hardware.

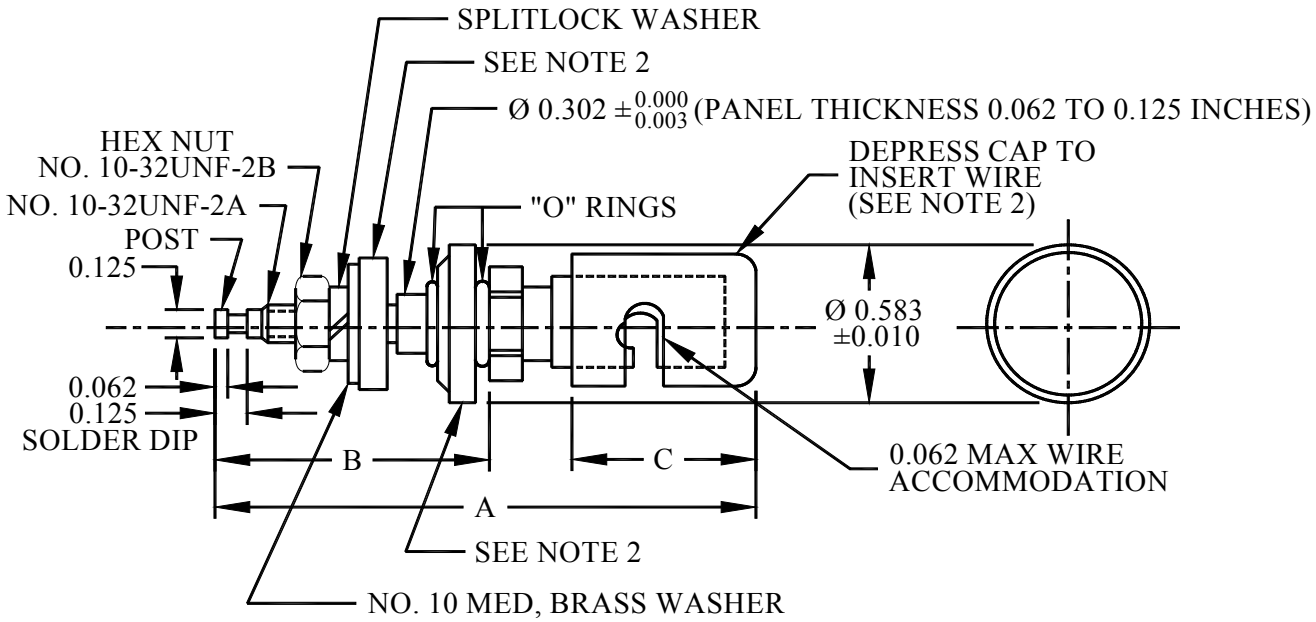

NOTES:
1. The figure depicts only general characteristics and is not intended to limit specific manufacturing processes.
2. This is the insulated portion.
3. Dimensions (listed in table I) are in inches. Tolerance is ±0.015 inch unless otherwise shown.

FIGURE 1. Binding post configuration.

3.2 Materials.

3.2.1 Metal. Unless specified otherwise in the acquisition order (see 7.3(c)), the current-carrying portions of the binding post shall be brass conforming to the requirements of the ASTM B16/B 16M, "Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines".

3.2.2 Finish. Unless otherwise specified in the acquisition order (see 7.3(d)), metal portions of the binding post shall be nickel plated in accordance with the SAE AMS-QQ-N-290, "Nickel Plating (Electrodeposited)".

3.2.2.1 Solder coating. Unless otherwise specified in the acquisition order (see 7.3(e)), the solder terminal end shall be hot solder dipped/coated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.2.3 Insulation. The material used for the insulated portions of the binding post shall be specified in the acquisition order (see 7.3(f)). The insulated washers of the binding post shall be natural/milky white unless otherwise specified in the acquisition order (see 7.3(g)). The insulated cap shall be the color listed in table I.

3.2.4 Cap and cap spring. The cap shall be insulated and non-removable. The strength of the cap spring shall permit the cap to be depressed using a force of 5 to 10 pounds.

3.3 Dielectric withstanding voltage. When specified in the acquisition order (see 7.3(h)), the insulated binding post shall be tested in accordance with method 301 of MIL-STD-202, "Test Method Standard for Electronic and Electrical Component Parts". The following details and exceptions shall apply:

a. The binding post shall be mounted on a 0.125 inch thick bare metal test mount. The binding post shall be mounted with insulators and o-rings by applying a torque of 10 ± 2 inch-pounds.
b. The magnitude of the test voltage shall be 1,200 VAC RMS. The harmonic content of the voltage shall not exceed 0.50 percent of the fundamental waveform.
c. The duration of application of test voltage shall be 1 minute ± 5 seconds.
d. The test voltage shall be applied between the conductor accommodation and the metal test mount.
e. The binding post shall show no evidence of damage, arcing, or breakdown after application of the test voltage.

3.4 Contact resistance. When specified in the acquisition order (see 7.3(i)), the binding post contact resistance shall be tested as follows:

a. A solid AWG size 16 copper conductor shall be inserted in the contact cavity.
b. A test current of 1 ampere shall be passed through the contact.
c. Contact resistance shall be determined by measuring the potential drop between the extreme terminal end of the binding post and the copper conductor.
d. The potential drop shall not be greater than 0.002 V.

3.5 Solderability of solder terminal end. When specified in the acquisition order (see 7.3(j)), the solderability of the binding post solder terminal end shall be tested in accordance with method 208 of MIL-STD-202.

3.6 Insulation resistance. When specified in the acquisition order (see 7.3(k)), the binding post insulation resistance shall be tested in accordance with method 302 of MIL-STD-202. The following details shall apply:

a. Test condition A.
b. The points of measurement shall be between two mutually insulated portions.
c. The insulation resistance shall not be less than 1,000 megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.7 Panel seal. When specified in the acquisition order (see 7.3(l)), the binding post panel seal shall be tested as follows:

a. The contact end of the binding post shall be immersed in tap water to a depth equivalent to six feet for a minimum of 24 hours.
b. The binding post shall be examined for leakage through the mounting hole. There shall be no visible leakage.

3.8 Conductor retention. When specified in the acquisition order (see 7.3(m)), conductor retention shall be tested as follows:

a. The assembled mounting post shall be mounted on a test panel.
b. A test bar, 0.062 inch diameter drill rod, 3 inches long, closed at one end with 1/4 inch diameter loop bent so that its center is common to the axis of the bar, shall be heat treated to a hardness of 45-50 on the Rockwell "C" scale as defined in ASTM E 18, "Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials". This bar shall be free from burrs and have a 32 micro-finish (minimum).
c. The test bar shall be inserted between the binding post jaws allowing 1/2 inch to project from the free end.
d. Attach one end of a spring scale to the loop on the bar and apply a pull force of approximately 3 pounds to the bar through the scale along the axis of the bar.
e. Gradually increase the force to 9.5 pounds ± 0.5 pounds.
f. There shall be no breakage of the binding post and no slippage of the test bar.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.


6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(n)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

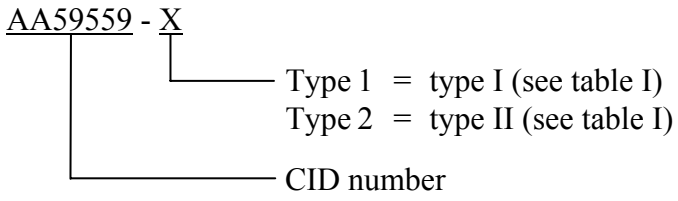

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.2.2 Military specifications and standards. Copies of military specifications and standards may be obtained from Standardization Documents Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. Electronic copies of military specifications and standards may be obtained from http://assist.daps.dla.mil.

7.2.3 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

7.2.4 SAE standards. Copies of SAE standards may be obtained from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001. Electronic copies of SAE standards may be obtained from http://www.sae.org/.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type required (see 2).
c. Current-carrying material, if different (see 3.2.1).
d. Binding post finish, if different (see 3.2.2).
e. Solder terminal end finish, if different (see 3.2.2.1).
f. Insulation material (see 3.2.3).
g. Insulated washer color, if different (see 3.2.3).
h. Dielectric withstanding voltage test, if required (see 3.3).
i. Contact resistance test, if required (see 3.4).
j. Solderability test, if required (see 3.5).
k. Insulation resistance test, if required (see 3.6).
l. Panel seal test, if required (see 3.7).
m. Conductor retention test, if required (see 3.8).
n. Preservation, packing, and marking (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.4 Subject term (key word) listing.

spring-loaded cap
terminal board
test set panels
wiring termination

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodians: Army - CR Navy - SH Air Force - 11	GSA - FSS
Review Activities: Army - AR, AT, MI Navy - AS, MC, OS Air Force - 99	Preparing Activity: DLA - GS2 (Project 5940-2006-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.