INCH-POUND
A-A-59560
23 June 2000
SUPERSEDING
MIL-P-55149/1D
16 July 1991

COMMERCIAL ITEM DESCRIPTION

POST, BINDING, ELECTRICAL (INSULATED)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for an insulated electrical binding post to be used as a wiring termination and banana plug receptacle on terminal boards and test set panels.

2. CLASSIFICATION. The electrical binding post shall be classified and identified by the types in accordance with the characteristics specified in table I. The selected type of product to be supplied shall be specified in the acquisition order (see 7.4(b)).

TABLE I. Binding post dimensions.

Type	Color	A[1]	B[1]	C[1]	D[1]	E[1]
I	Red	.690	.980	.468	8-32	.343
II	Black	.690	.980	.468	8-32	.343
III	Red	.870 min .910 max.	1.05	.640	10-32	.468
IV	Black		1.05	.640	10-32	.468

[1] See figure 1.

3. SALIENT CHARACTERISTICS

3.1 Components. The product shall be similar to the one shown in figure 1. The product shall consist of the binding post, insulated captive head and washers, and all mounting hardware.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

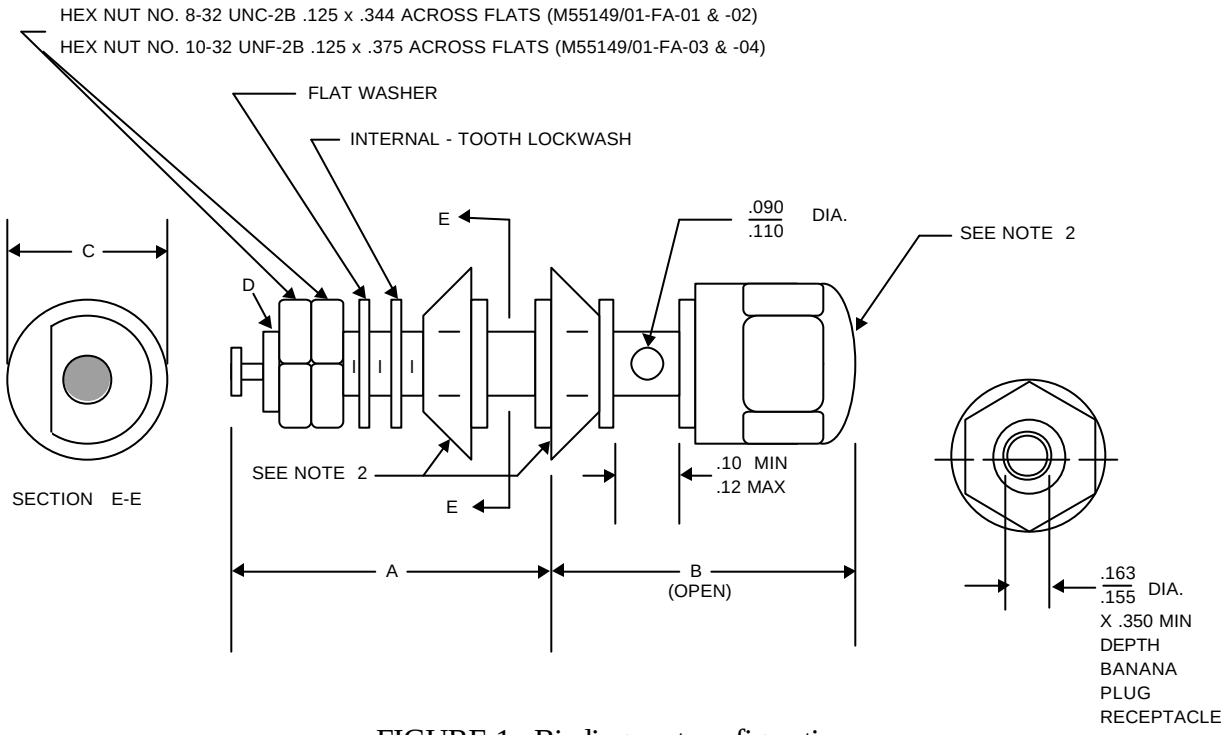

FIGURE 1. Binding post configuration.

Notes:
1. The figure depicts only general characteristics and is not intended to limit specific manufacturing processes.
2. This is the insulated portion.
3. Dimension (listed in table I) are in inches. Tolerance is ±0.015 inch unless otherwise shown.

3.2 Materials.

3.2.1 Metal. Unless specified otherwise in the acquisition order (see 7.4(c)), the current-carrying portions of the binding post shall be brass conforming to the requirements of the American Society for Testing and Materials (ASTM) B 16, "Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines" (DoD adopted).

3.2.2 Finish. Unless specified otherwise in the acquisition order (see 7.4(d)), metal portions of the binding post shall be gold plated in accordance with ASTM B 488, "Standard Specification for Electrodeposited Coatings of Gold for Engineering Uses" (DoD adopted).

3.2.2.1 Unless otherwise specified in the acquisition order (see 7.4(e)), the solder terminal end shall be tin plated in accordance with ASTM B 545, "Standard Specification for Electrodeposited Coatings of Tin" (DoD adopted).

3.2.3 Insulation. The material used for the insulated portions of the binding post shall be specified in the acquisition order (see 7.4(f)). The insulated parts of an individual binding post shall all be of the same color and, unless otherwise specified in the acquisition order (see 7.4(g)), shall be the color listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.3 Non-turn feature. Unless specified otherwise in the acquisition order (see 7.4(h)), the non-turn feature shall be a flatted boss as shown in figure 1.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(i)).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AAXXXXX – X

- X: Dash number (1 = Type I (see table I)) (2 = Type II (see table I)) (3 = Type III (see table I)) (4 = Type IV (see table I))
- AAXXXXX: CID number

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.2 2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 National stock number (NSN). The NSNs listed in table II are assigned for the listed product types (see table I). Other NSNs may also correspond with this document.

TABLE II. Binding post NSNs.

Type	Assigned NSN
I	5940-00-842-6483
II	5940-00-044-1583
III	5940-00-269-2220
IV	5940-00-269-2219

7.4 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Product classification (type) (see table I)
c. Current-carrying material, if different (see 3.2.1)
d. Binding post finish, if different (see 3.2.2)
e. Solder terminal end finish, if different (see 3.2.2.1)
f. Insulation material (see 3.2.3)
g. Insulation material color, if different (see 3.2.3)
h. Non-turn feature, if different (see 3.3)
i. Packaging requirements (see 6.1)

7.5 Substitution data. See table III.

TABLE III. Substitution data.

PIN number in A-A-59560	Part number in MIL-P-55149/1D
AA59560 - 1	M55149/01-FA-01
AA59560 - 2	M55149/01-FA-02
AA59560 - 3	M55149/01-FA-03
AA59560 - 4	M55149/01-FA-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - EC
Air Force - 11

Reviewers:
Army - MI
Air Force - 99

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS

(Project 5940-1394)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.