INCH-POUND
A-A-59561B
25 November 2019
SUPERSEDING
A-A-59561A
24 August 2011

COMMERCIAL ITEM DESCRIPTION

SHIM, SOLID, ROUND

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for shims to be used for maintaining a predetermined distance between two surfaces.

2. CLASSIFICATION. The shims shall be similar to that shown in figure 1 and classified by the types listed below and by the sizes listed in table I. The type and size shall be specified in the acquisition order (see 7.4(b)).

Type I - Aluminum alloy, anodized
Type II - Aluminum alloy, chemically treated
Type III - Brass, black chemical finish
Type IV - Corrosion resistant steel (CRES), passivated
Type V - Carbon steel, cadmium plated

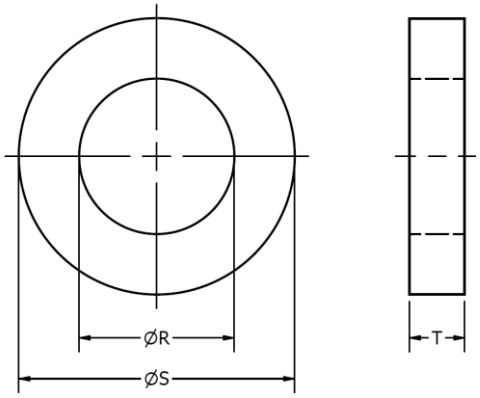


FIGURE 1. Shim, solid, round.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 5365

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

TABLE I. Size codes and dimensions.

Thickness (T)												
T = .001			T = .005			T = .010			T = .013			
Size	ØR	ØS	Size	ØR	ØS	Size	ØR	ØS	Size	ØR	ØS	
0001	0.088	0.153	0050	0.100	0.188	0087	0.093	0.187	0140	0.128	0.315	
0002	0.125	0.187	0051	0.127	0.218	0088	0.094	0.205	0141	0.199	0.305	
0003	0.187	0.500	0052	0.128	0.281	0089	0.128	0.315	0142	0.320	0.425	
0004	0.190	0.246	0053	0.130	0.188	0090	0.156	0.250	0143	0.502	0.750	
0005	0.252	0.344	0054	0.190	0.344	0091	0.198	0.450	T = .014			
0006	0.447	0.625	0055	0.252	0.344	0092	0.199	0.305	Size	ØR	ØS	
T = .002			0056	0.255	0.390	0093	0.234	0.500	0144	0.128	0.315	
Size	ØR	ØS	0057	0.317	0.470	0094	0.252	0.308	0145	0.198	0.450	
0007	0.128	0.250	0058	0.377	0.498	0095	0.252	0.344	0146	0.210	0.510	
0008	0.130	0.188	0059	0.393	0.627	0096	0.255	0.350	0147	0.324	0.520	
0009	0.200	0.400	0060	0.415	0.470	0097	0.260	0.300	0148	0.630	0.781	
0010	0.250	0.359	0061	0.503	0.625	0098	0.260	0.335	0149	1.110	1.250	
0011	0.250	0.748	0062	0.600	0.740	0099	0.258	0.368	T = .015			
0012	0.275	0.360	0063	0.625	0.734	0100	0.281	0.500	Size	ØR	ØS	
0013	0.275	0.750	0064	0.752	1.000	0101	0.284	0.544	0150	0.128	0.315	
0014	0.393	0.627	0065	0.753	0.975	0102	0.312	0.415	0151	0.187	0.250	
0015	0.395	0.930	0066	1.000	1.250	0103	0.320	0.425	0152	0.235	0.290	
0016	0.399	0.555	0067	1.432	1.623	0104	0.324	0.520	0153	0.265	0.500	
0017	0.500	0.700	0068	1.650	1.840	0105	0.377	0.498	0154	0.380	0.625	
0018	0.753	0.975	0069	2.190	2.438	0106	0.378	0.810	0155	0.520	0.660	
0019	0.795	0.867	0070	3.050	3.313	0107	0.380	0.585	0156	0.750	0.990	
0020	0.900	0.995	T = .006			0108	0.393	0.627	0157	0.752	1.000	
0021	1.000	1.375	Size	ØR	ØS	0109	0.531	1.000	0158	1.031	1.281	
0022	1.432	1.623	0071	0.200	0.510	0110	0.753	0.975	T = .016			
0023	2.190	2.438	0072	0.280	0.500	0111	0.840	1.310	Size	ØR	ØS	
0024	2.435	2.873	0073	0.280	0.760	0112	1.078	1.375	0159	0.094	0.160	
0025	3.050	3.313	0074	0.320	0.700	0113	1.320	2.000	0160	0.109	0.245	
T = .003			0075	0.681	1.000	0114	2.182	2.750	0161	0.128	0.375	
Size	ØR	ØS	0076	0.800	0.980	0115	2.190	2.438	0162	0.140	0.312	
0026	0.096	0.140	0077	0.812	2.000	0116	2.435	2.873	0163	0.150	0.300	
0027	0.125	0.250	0078	1.020	1.325	0117	2.515	3.225	0164	0.156	1.375	
0028	0.166	0.250	0079	1.080	1.490	0118	2.598	3.313	0165	0.160	0.205	
0029	0.190	0.265	0080	1.320	2.050	0119	3.050	3.313	0166	0.166	0.250	
0030	0.250	0.359	0081	3.515	4.015	0120	6.000	6.250	0167	0.175	0.245	
0031	0.252	0.344	T = .007			0121	10.930	12.312	0168	0.200	0.313	
0032	0.313	1.000	Size	ØR	ØS	T = .011			0169	0.203	0.265	
0033	0.377	0.498	0082	0.377	0.498	Size	ØR	ØS	0170	0.203	0.625	
0034	0.377	0.625	0083	0.377	0.625	0122	0.128	0.315	0171	0.261	0.497	
0035	0.393	0.627	T = .008			0123	0.255	0.390	0172	0.390	0.465	
0036	0.415	0.470	Size	ØR	ØS	0124	0.312	0.495	0173	0.530	1.000	
0037	0.570	0.875	0084	0.100	0.200	T = .012			0174	0.594	0.734	
0038	0.753	0.975	0085	1.758	3.250	Size	ØR	ØS	0175	0.644	0.844	
0039	1.000	1.375	0086	1.891	2.469	0125	0.128	0.250	0176	0.752	1.250	
0040	1.250	1.375				0126	0.128	0.315	0177	1.202	1.310	
0041	1.432	1.623				0127	0.198	0.450	0178	2.190	2.480	
0042	2.190	2.438				0128	0.199	0.305				
0043	2.435	2.873				0129	0.250	0.480				
0044	3.050	3.313				0130	0.252	0.344				
T = .004						0131	0.255	0.531				
Size	ØR	ØS				0132	0.258	0.368				
0045	0.135	0.234				0133	0.320	0.425				
0046	0.170	0.360				0134	0.324	0.520				
0047	0.195	0.468				0135	0.500	0.875				
0048	0.252	0.344				0136	1.210	1.550				
0049	0.375	0.500				0137	2.002	2.490				
						0138	2.002	2.740				
						0139	3.125	3.675				

[1] Dimensions are in inches, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Tolerances. Unless otherwise specified in the acquisition order (see 7.4(c)), tolerances for the shims listed in table I shall be as shown below in table II:

Table II. Tolerances.

Thickness (T)	Thickness (T) Tolerance	Size Codes for The Respective Thickness (T)		Outside Diameter (ØS)	Outside Diameter (ØS) Tolerance
.001 to .005	±10%	0001 – 0070		Up to 1"	±.003
.006 to .010	±.0005	0071 – 0121		Over 1", up to 3"	±.005
.011 to .016	±.001	0122 – 0178		Over 3"	±.010

[1] Dimensions are in inches, unless otherwise specified.

3.2 Materials.

3.2.1 Type I and II shims shall be aluminum alloy 5052, (unified numbering system (UNS) A95052), temper H38, in accordance with ASTM B209, "Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate".

3.2.2 Type III shims shall be brass alloy UNS C26000, temper H02 (formerly half-hard), in accordance with ASTM B36/B36M, "Standard Specification for Brass Plate, Sheet, Strip, And Rolled Bar".

3.2.3 Type IV shims shall be austenitic CRES type 302, UNS S30200, temper 1/4 hard in accordance with ASTM A666, "Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar".

3.2.4 Type V shims shall be low-carbon steel, selected from designations 1010 through 1015 (UNS G10100 through G10150), in accordance with ASTM A568/A568M, "Standard Specification for Steel, Sheet, Carbon, Structural, and High-Strength, Low-Alloy, Hot-Rolled and Cold-Rolled, General Requirements for".

3.3 Protective finish or surface treatment.

3.3.1 Type I shims shall be anodic coated in accordance with ASTM B580, "Standard Specification for Anodic Oxide Coatings on Aluminum".

3.3.2 Type II shims shall be chemically treated in accordance with MIL-DTL-5541, "Chemical Conversion Coatings on Aluminum and Aluminum Alloys".

3.3.3 Type III shims shall be protective finished as specified in MIL-F-495 unless the acquisition order provides for an alternative method (see 7.4(d)).

3.3.4 Type IV shims shall be cleaned, descaled, and passivated in accordance with ASTM A967/A967M, "Standard Specification for Chemical Passivation Treatments for Stainless Steel Parts".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

3.3.5 Type V shims shall be cadmium plated in accordance with ASTM B766, "Standard Specification for Electrodeposited Coatings of Cadmium".

3.4 Roughness Depth (Rmax). The product shall have a maximum Rmax of 63 µin, determined in accordance with ASME B46.1, "Surface Texture (Surface Roughness, Waviness, and Lay)".

3.5 Cracks. The shims shall be free from visible cracks, flaws, and pits in any location. A crack is a clean crystalline fracture passing through (transgranular) or across (intergranular) the grain boundaries without inclusion of foreign elements.

3.6 Workmanship. The shims shall be free from surface contamination, tool marks, and other imperfections which may adversely affect usability.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Foreign acquisition restrictions. Unless otherwise indicated in the solicitation and resulting contract, the foreign acquisition restrictions in Section 252.225, Clause 252.225.7016 of the Defense Federal Acquisition Regulation Supplement (DFARS) apply to products described by this CID.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(e)).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

AAXXXXX – X XXXX

- Size (see table I)
- Type:
  - 1 - Type I - Aluminum alloy, anodized
  - 2 - Type II - Aluminum alloy, chemically treated
  - 3 - Type III - Brass, black chemical finish
  - 4 - Type IV - CRES, passivated
  - 5 - Type V - Carbon steel, cadmium plated
- CID number

7.2 Sources of documents.

7.2.1 DFARS and FAR. Electronic copies of DFARS and FAR may be obtained from https://www.acquisition.gov/dfars/ and https://www.acquisition.gov/far/ respectively.

7.2.2 Government documents. Electronic copies may be obtained from https://quicksearch.dla.mil/.

7.2.3 ASME standards. Electronic copies may be obtained from http://www.asme.org/.

7.2.4 ASTM standards. Electronic copies may be obtained from http://www.astm.org/.

7.3 National stock number (NSN). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

TABLE III. Assigned NSNs.

Type	Size code	NSN
IV	0002	5365-01-407-7890
IV	0004	5365-01-407-7900
IV	0008	5365-01-361-9004
IV	0009	5365-01-475-0005
IV	0017	5365-01-334-1336
IV	0028	5365-01-407-7897
IV	0034	5365-01-434-2428
IV	0037	5365-01-339-4032
IV	0053	5365-01-407-7892
IV	0064	5365-01-490-9986
IV	0090	5365-01-407-7896
IV	0107	5365-01-605-3291
IV	0125	5365-01-407-7899
IV	0151	5365-01-407-7898
IV	0153	5365-01-389-6361
IV	0157	5365-01-379-5133
IV	0173	5365-01-432-4928

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Product type (see 2) and size (see table I)
c. Tolerance, if different (see 3.1)
d. Type III shim protective finish (see 3.3.3)
e. Packaging requirements (see 6.1)

7.5 Safety Data Sheet (SDS). If the use of cadmium is not considered an article as specified in OSHA 3844, "Hazard Communication: Hazardous Classification Guidance for Manufacturers, Importers, and Employers", a SDS must be prepared and submitted in accordance with FED-STD-313 (obtain from https://assist.dla.mil). The SDS must also meet the requirements of 29 CFR 1910.1200. The 29 CFR 1910.1200 requires that the SDS for each hazardous chemical used in an operation must be readily available to personnel using the material.

7.6 Subject term (key word) listing.

Cadmium
CRES

7.7 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodian: Army – AR DLA - GS	GSA - FAS
Reviewers: Army - AV, MI	Preparing activity: DLA – GS4
	(Project 5365-2020-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.