INCH-POUND

A-A-59562A
22 March 2007
SUPERSEDING
A-A-59562
23 June 2000

COMMERCIAL ITEM DESCRIPTION

POST, BINDING, ELECTRICAL, SCREW-TYPE (UNINSULATED)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers an uninsulated electrical binding post with insulated cap used as a wiring termination on terminal boards and test set panels. This binding post uses a screw-type wire gripping action.

2. CLASSIFICATION. The electrical binding post shall be classified and identified by the types in accordance with the characteristics specified in table I. The selected types of products to be supplied shall be specified in the acquisition order (see 7.3(b)).

TABLE I. Electrical binding post classifications and dimensions.

Type	Color	Dimensions					
		A[1]	B[1] (max.)	C[1]	D[1]	E[1]	F[1]
I	Black	0.562	0.734	0.312	6-32	0.125 X 0.094	0.500
II	Black	0.812	0.937	0.438	8-32	0.125 X 0.156	0.500


[1]See figure 1.

3. SALIENT CHARACTERISTICS

3.1 Components. The electrical binding post shall be similar to the one shown in figure 1. The product shall consist of the binding post, captive cap, and all mounting hardware.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

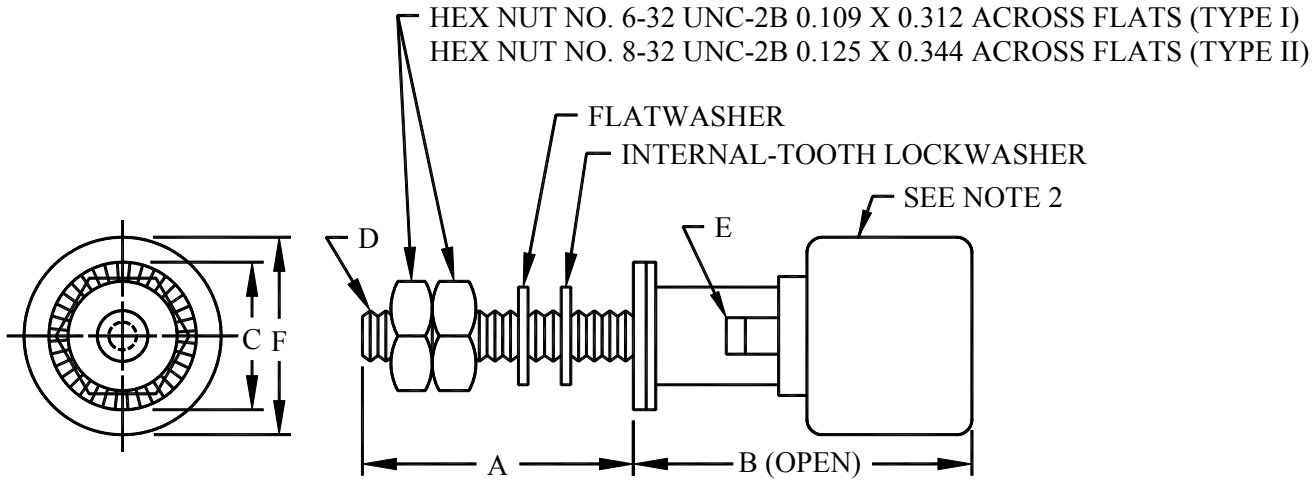

NOTES:
1. The figure depicts only general characteristics and is not intended to limit specific manufacturing processes.
2. This is the insulated portion. Shape of insulated portion is optional.
3. Dimensions (listed in table I) are in inches. Tolerance is ±0.015 inch unless otherwise shown.

FIGURE 1. Binding post configuration.

3.2 Materials.

3.2.1 Metal. Unless specified otherwise in the acquisition order (see 7.3(c)), the current-carrying portions of the binding post shall be brass conforming to the requirements of ASTM B 16/B 16M, "Standard Specification for Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines".

3.2.2 Finish. Unless otherwise specified in the acquisition order (see 7.3(d)), metal portions of the binding post shall be nickel plated in accordance with SAE AMS-QQ-N-290, "Nickel Plating (Electrodeposited)".

3.2.3 Cap. The cap shall be insulated and non-removable. The material used for the insulated caps of the binding post shall be specified in the acquisition order (see 7.3(e)).

3.3 Non-turn feature. Unless otherwise specified in the acquisition order (see 7.3(f)), the non-turn feature shall be a knurled base as shown in figure 1.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.


5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(g)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

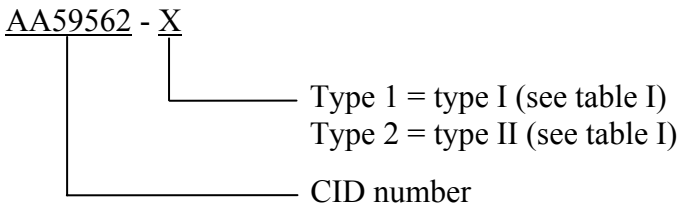

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

7.2.3 SAE standards. Copies of SAE standards may be obtained from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001. Electronic copies of SAE standards may be obtained from http://www.sae.org/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type required (see table I).
c. Current-carrying material, if different (see 3.2.1).
d. Binding post finish, if different (see 3.2.2).
e. Insulation material (see 3.2.3).
f. Non-turn feature, if different (see 3.3).
g. Preservation, packing, and marking (see 6.1).

7.4 Subject term (key word) listing.

captive cap
insulated cap
terminal board
test set panels
wiring termination

MILITARY INTERESTS:	CIVIL AGENCY COORDINATING ACTIVITY:
Custodians: Army - CR Navy - EC Air Force - 11	GSA - FSS
Review Activities: Army - AT, MI Navy - AS, MC, OS Air Force - 99	Preparing Activity: DLA - GS2 (Project 5940-2006-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.