INCH-POUND

A-A-59567/1A
20 April 2017
Superseding
A-A-59567/1
6 November 2014


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOSE ASSEMBLIES, GARDEN, WATER, AND WATER SUCTION, RIBBED SHANK (SHORT OR LONG), WITH PIN LUG SWIVEL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the hose assemblies, garden, water, and water suction, ribbed shank (short or long), with pin or hex lug swivel described herein shall consist of this document and the latest issue in effect of A-A-59567.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system, which is included in the PIN as shown in the following example (see NOTES).

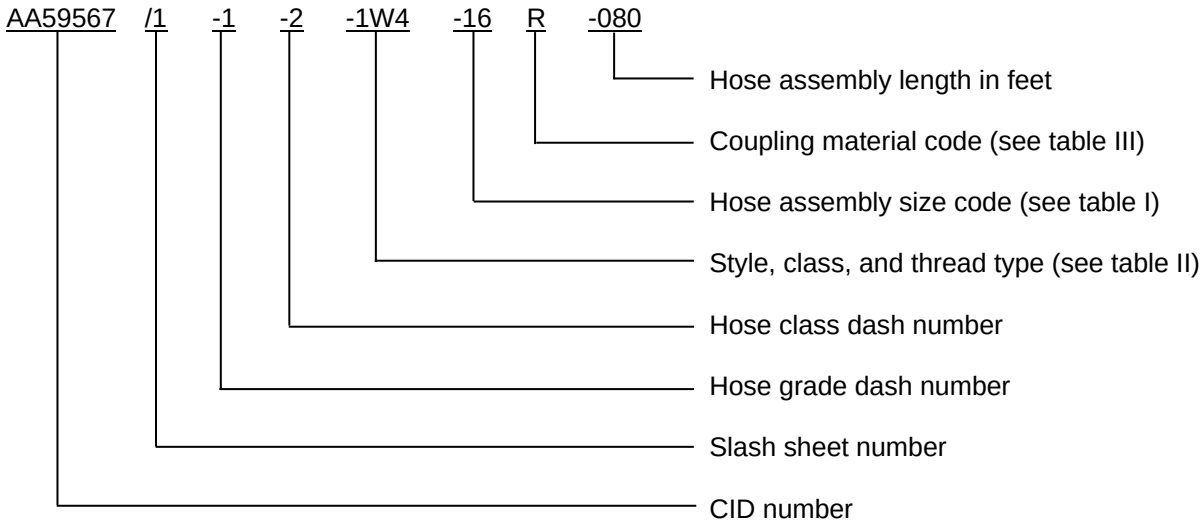

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Hose assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59567 for hose, A-A-59614 for the couplings, and shall be as specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VA**I**, P.O. Box 3990, Columbus OH 432180-3990, or fluidflow@dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Hose. Hose shall be in accordance with A-A-59567.

Hose grade dash number:

-1 - Commercial hose
-3 - Weather and ozone-resistant hose

Class dash number:

-1 - General non-potable water inner tube
-2 - Potable water inner tube

Grade 1, class 1. Grade 1, class 1 hose is intended for general water discharge services.

Grade 3, class I or class 2. Grade 3, class 1 or class 2 hose is intended for water applications where resistance to deterioration by weather and ozone is required.

Class 2 inner tube. Grade 1 or grade 3 hose with class 2 inner tube is for use with potable water.

Working pressure. Working pressure shall be in accordance with A-A-59567.

Hose assemblies. Hose assemblies shall be furnished with male and female ends of the same type style, class, and material as specified in the PIN.

Hose assembly size codes. Hose assembly size codes shall be in accordance with table I.

TABLE I. Size codes for hose assemblies.

PIN size code	Hose Assembly size	A-A-59614/2 Class AA coupling size	A-A-59614/4 Class AA coupling size
-16	1.000	1.000	---
-20	1.250	1.250	1.250
-24	1.500	1.500	1.500
-32	2.000	2.000	2.000
-34	2.500	2.500	2.500
-48	3.000	3.000	3.000
-64	4.000	4.000	4.000
-48	6.000	6.000	---

Length of hose assembles. Length of hose assembles shall be measured in feet in accordance with A-A-59567. Examples: 080 for 80 feet and 250 for 250 feet.

Tightening provisions. A-A-59614/2 the wrenching surfaces, when specified, shall be octagon or hexagon and located on the male coupling half, see figure 1 and table II. When specified pin lugs shall be on both male and female coupling halves, see table II. A-A-59614/4 the male and female sections shall have pin lugs, see figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.


Class AA couplings (see table I or II). When attached to hose, A-A-59614/2 class AA couplings shall be able to withstand an internal hydrostatic pressure of 300 psi for 1 inch, 250 psi for sizes 1.25 and 1.50 inch, and 200 psi for sizes 2.00 through 4.00 inch, for at least one minute without showing any signs of leakage. When attached to hose, A-A-59614/4 class AA couplings shall be able to withstand hydrostatic proof pressure testing of 125 psi for size 1.500 and 100 psi for all other sizes for at least one minute without showing any signs of leakage. See table I for hose assembly sizes available.

Threads. Threads shall be NH, NPSH, NPSM, or NPT, see table II.

NOTE: NH, NPSH, and NSPM threads are not interchangeable with other thread types.


Couplings type I styles 2 and 4 (pin lug swivel). Type I styles 2 and 4 couplings shall be in accordance with A-A-59614/2 (short shank) or A-A59614/4 (long shank), see figure 1 or 2.

Female section. Female section shall have a swivel nut; with gasket recess in swivel, (recess may be omitted provided the standard commercial gasket does not fall out when the two sections are disconnected).

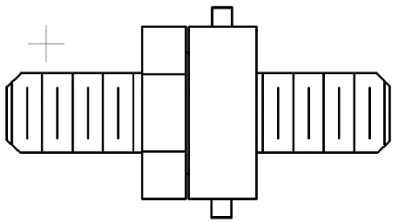

A-A-59614/2

FIGURE 1. Short shank style 2, type I, class AA.

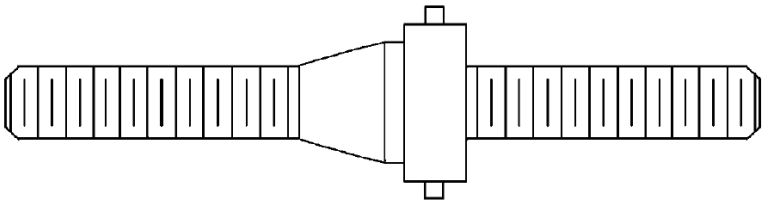

A-A-59614/4

FIGURE 2. Long shank style 4, type I, class AA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

TABLE II. PIN codes for class AA style thread, and clamp designator.

Class AA coupling PIN code	Coupling CID	Style	Thread type	A-A-52506 clamp type designator (see figure 3)	Ferrule designator see table IV 1/
1W2	A-A-59614/2	Pin lugs short shank (1W)	NH	A, B, C, D, E, F, G, H,	CA, R, or Z
1WS2 2/	A-A-59614/2	Pin lugs short shank (1WS) material codes B and F only	NPSH		
1WN2	A-A-59614/2	Pin lugs short shank (1WN)	NPSM		
1BW2 3/	A-A-59614/2	Pin lugs on both male and female coupling halves, short shank (1BW)	NH		
1BWS2 3/	A-A-59614/2	Pin lugs on both male and female coupling halves, short shank (1BWS)	NPSH		
1W4	A-A-59614/4	Pin lugs long shank (1W)	NPT male end, NPSM female end		

1/ Ferrule material see table IV.
2/ Material codes B and F only.
3/ The “B” designator is for pin lugs on both male and female coupling halves. Not applicable for aluminum shank w/brass pin lug swivel.

Materials. Couplings shall be cast, forged, or machined, from one of the materials in table III.

TABLE III. Material types and designator.

Material designator code	Material	
	Short shank with pin lug swivel A-A-59614/2	Long shank with pin lug swivel A-A-59614/4
A	Aluminum shank w/brass pin lug swivel	---
B	Copper alloy (Brass)	Plated steel - Brass Nut
F	Iron shank - Iron nut with zinc plating	---
G	Iron shank - Brass nut with zinc plating	---
R	CRES	CRES - CRES nut
S	Steel with zinc plating	Plated steel - Iron nut
U	---	CRES - Iron nut
Z	Zinc-base alloy	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Hose clamps. Hose clamps shall be in accordance with A-A-52506 see figure 3 for types.

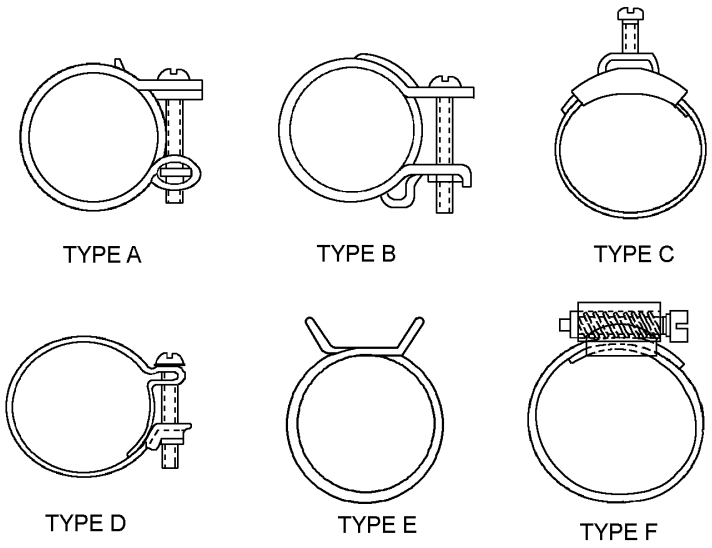


FIGURE 3. Hose clamp types.

Compression ferrule. Compression ferrule shall be in accordance with A-A-59614, see table IV for material designators.

TABLE IV. Ferrule material designators.

Designator	Material
CA	Copper alloy (brass)
R	Corrosion resistant steel
Z	Zinc-coated steel

Clamps and ferrules. Clamps or ferrules shall not extend closer than .062 inch to the end of the shank.

Long shank. Long shank hose assemblies shall have two or more clamps for sealing of couplings to hose.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID.

Source of documents.

COMMERCIAL ITEM DESCRIPTIONS

A-A-52506	-	Clamps, Hose
A-A-59567	-	Hose and Hose Assemblies, Rubber (Yarn or Fabric Reinforced) Water Service
A-A-59614	-	Coupling Assembly, Hose (Garden, Water, and Water Suction)
A-A-59614/2	-	Coupling Assembly, Hose (Garden, Water, and Water Suction), Short Shank with Pin Lug Swivel, Type I, Style 2
A-A-59614/4	-	Coupling Assembly, Hose (Garden, Water, and Water Suction), Long Shank with Pin Lug Swivel, Style 4, Type I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

STANDARDS

FED-STD-H28/10 - Screw-Thread Standards for Federal Services Section 10 Hose Coupling and Fire Hose Coupling Screw Threads

(Copies of this document are available online at http://quicksearch.dla.mil/).

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
1U339	Labarge Products, Inc. 2900 Brannon Avenue St. Louis, MO 63139 Phone number: 1-314-776-2900 Fax number: 1-314-776-6444 sales@whsmithco.com www.labargepro.com ejenkusky@whsmithco.com
30659	Moon American Inc. 167-B SW Cutoff Worchester, MA 01604 Phone number: 1-507-798-8887 Fax number: 1-508-798-7839 sales@moon-american.com www.moon-american.com

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
DLA - CC

Review activities:
Navy - SA

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing activity:
DLA - CC

(Project 4720-2017-002)

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.