INCH-POUND

A-A-59567/5A
20 April 2017
SUPERSEDING
A-A-59567/5
6 November 2014


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOSE ASSEMBLY, GARDEN, WATER, AND WATER SUCTION, LONG HANDLE SWIVEL TYPE COUPLER

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the hose assembly, garden, water, and water suction, long handle swivel type coupler described herein shall consist of this document and the latest issue in effect of A-A-59567.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

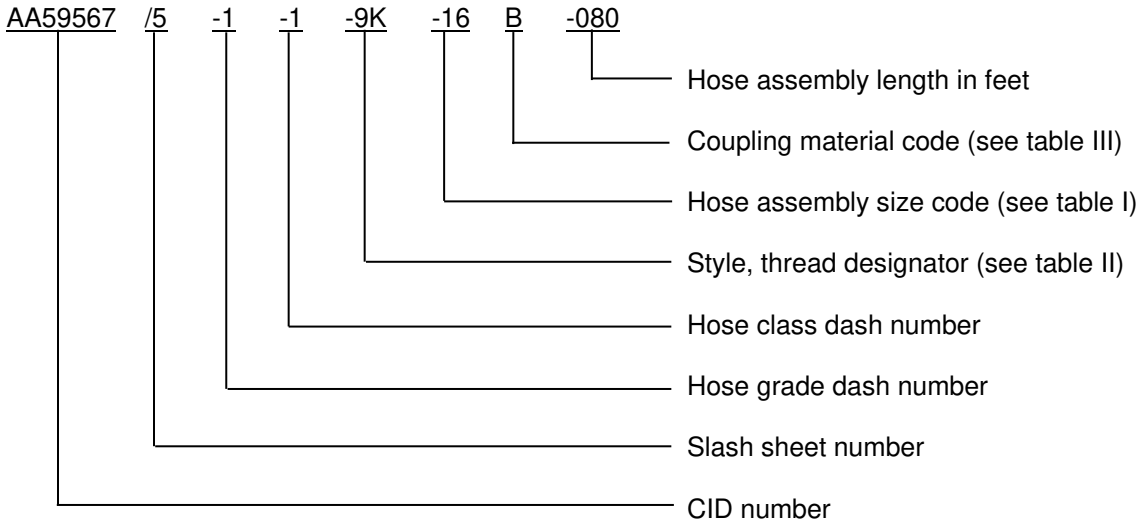

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VAI, P.O. Box 3990, Columbus OH 432180-3990, or fluidflow@dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Hose assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59567 and be as specified herein (see figure 1).

Hose. Hose shall be in accordance with A-A-59567.

Hose grade dash number:

-1 - Commercial hose
-3 - Weather and ozone-resistant hose

Class dash number:

-1 - General non-potable water inner tube
-2 - Potable water inner tube

Grade 1, class 1. Grade 1, class 1 hose is intended for general water discharge services.

Grade 3, class I or class 2. Grade 3, class 1 or class 2 hose is intended for water applications where resistance to deterioration by weather and ozone is required.

Class 2 inner tube. Grade 1 or grade 3 hose with class 2 inner tube is for use with potable water.

Hose assemblies. Hose assemblies shall be furnished with a male and female ends of the same type style, class, and material as specified in the PIN.

Working pressure. Working pressure shall be in accordance with A-A-59567.

Interface and physical dimensions. Hose assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59567 and as specified herein.

Construction. Unless otherwise specified, long handle swivel couplings coupling parts shall be in accordance with A-A-59614 and A-A-59614/9 for expansion ring couplings.

NOTE: Hose assemblies for this CID are not intended to meet the pressure requirements of the couplings.

Hose assembly size codes. Hose assembly size code shall be in accordance with table I.

Length of hose assembles. Length of hose assembles shall be measured in feet in accordance with A-A-59567. Examples: 080 for 80 feet and 250 for 250 feet.

Couplings.

Construction. Unless otherwise specified, type III coupling parts shall be in accordance with A-A-59614/9, except as specified herein.

Class B couplings pressure. Class B couplings shall be able to withstand an internal hydrostatic pressure of 250 psi for size 1.500 inch, 200 psi and for sizes 2.000 through 4.000 inch for at least one minute without showing any signs of leakage. See table I for hose assembly sizes available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Class B couplings vacuum. The couplings shall be able to withstand a 22-inch mercury vacuum for at least one minute without loss of coupling seal or where the hose joins the coupling. See table I for hose assembly sizes available.

TABLE I. Size codes for hose assemblies. 1/

PIN size code	Hose assembly size
-12	1.500
-16	2.000
-20	2.500
-24	3.000
-28	3.500
-32	4.000

1/ The size indicates the hose inside diameter (ID).

Coupling hose threads. Coupling hose threads shall be either National Hose (NH) or National Pipe Straight Hose (NPSH) in accordance with FED-STD-H28/10. NH and NPSH threads are not interchangeable. See table II for class B style, threads.

TABLE II. PIN codes for class B type, style and thread.

Class A coupling PIN code	Style	Thread type
9J	Expansion ring	NH
9K	Expansion ring	NPSH

Internally expanded expansion ring. Expansion ring hose assemblies, see A-A-59614/9. Internally expanded couplings requires special tooling to attach to hose.

Gasket. Hose assemblies shall come with gaskets; see A-A-59614/9. Gasket material shall be suitable for potable water or non-potable water as applicable.

Materials. Long handle couplings shall be cast or machined from copper alloy (brass), corrosion resistant steel, or steel, see table III.

TABLE III. Material types and designator.

Material designator code	Material
B	Copper alloy (brass) class 2
R	Corrosion resistant steel
S	Steel zinc plated

Tightening provisions. Long handle lugs, shall be located on the swivel nut only, see figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

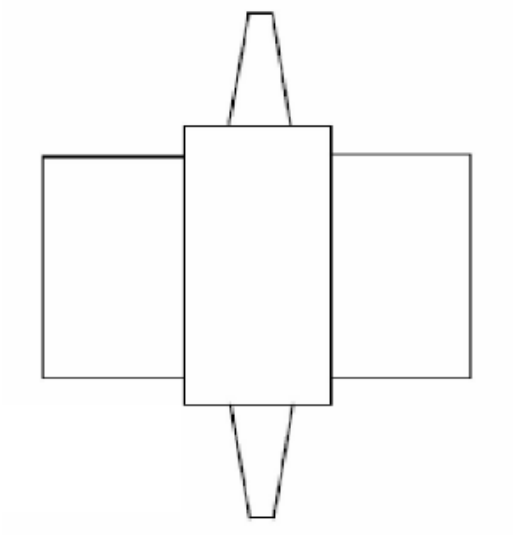


FIGURE 1. Long handle swivel.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID.

Source of documents.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59567	-	Hose and Hose Assemblies, Rubber (Yarn or Fabric Reinforced) Water Service
A-A-59614	-	Coupling Assembly, Hose (Garden, Water, and Water Suction)
A-A-59614/9	-	Coupling Assembly, Hose (Garden, Water, and Water Suction), Long Handle Swivel

STANDARDS

FED-STD-H28/10	-	Screw-Thread Standards for Federal Services Section 10 Hose Coupling and Fire Hose Coupling Screw Threads

(Copies of this document are available online at http://quicksearch.dla.mil).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
1U339	Labarge Products, Inc. 2900 Brannon Avenue St. Louis, MO 63139 Phone number: 1-314-776-2900 Fax number: 1-314-776-6444 sales@whsmithco.com www.labargepro.com
30659	Moon American Inc. 167-B SW Cutoff Worchester, MA 01604 Phone number: 1-507-798-8887 Fax number: 1-508-798-7839 sales@moon-american.com www.moon-american.com

Part number (P/N) supersession data. These CID PINs supersede the following Federal specification part numbers as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
DLA - CC

Review activities:
Navy - SA

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing activity:
DLA - CC

(Project 4720-2017-006)

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.