INCH-POUND

A-A-59567/7A
20 April 2017
SUPERSEDING
A-A-59567/7
6 November 2014


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOSE ASSEMBLY, GARDEN, WATER, AND WATER SUCTION, HEX, SHANK (SHORT OR LONG) TYPE COUPLER

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the hose assembly, garden, water, and water suction, hex, shank type coupler described herein shall consist of this document and the latest issue in effect of A-A-59597.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

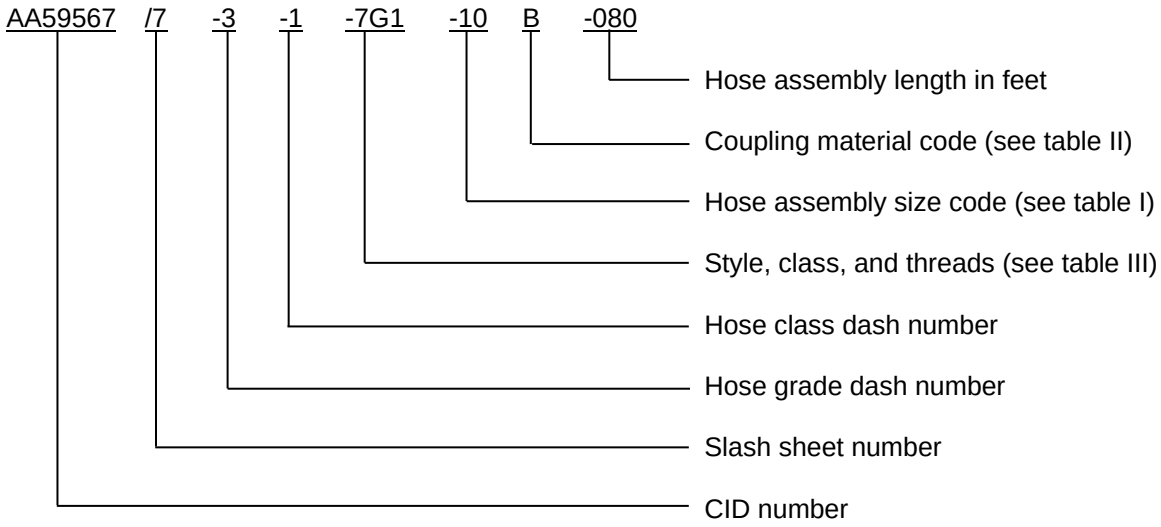

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Hose assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59567 and as herein (see figure 1).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: DLA Land and Maritime, ATTN: VA**I**, P.O. Box 3990, Columbus OH 432180-3990, or fluidflow@dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A

FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Hose. Hose shall be in accordance with A-A-59567.

Hose grade dash number:

-1 - Commercial hose
-3 - Weather and ozone-resistant hose

Class dash number:

-1 - General non-potable water inner tube
-2 - Potable water inner tube

Grade 1, class 1. Grade 1, class 1 hose is intended for general water discharge services.

Grade 3, class I or class 2. Grade 3, class 1 or class 2 hose is intended for water applications where resistance to deterioration by weather and ozone is required.

Class 2 inner tube. Grade 1 or grade 3 hose with class 2 inner tube is for use with potable water.

Working pressure. Working pressure shall be in accordance with A-A-59567.

Hose assemblies. Hose assemblies shall be furnished with a male and female ends of the same type style, class, and material as specified in the PIN.

Interface and physical dimensions. Hose assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59567 and as specified herein.

Hose assembly size codes. Hose assembly size code shall be in accordance with table I.

TABLE I. Size codes for hose assemblies.

PIN size code	Hose Assembly size	A-A-59614/1 and /3	
		Class A Couplings size	Class AA Coupling size
-8	.500	.500	—
-10	.625	.625	—
-12	.750	.750	.750
-16	1.00	—	1.000
-20	1.25	—	1.250
-24	1.50	—	1.500
-32	2.00	—	2.000
-34	2.50	—	2.500
-48	3.00	—	3.000
-56	3.50	—	3.500
-64	4.00	—	4.000

1/ The size indicates the nominal size of the coupling to fit the hose inside diameter (ID). For example, size .500 is for a coupling to fit the.500 inch ID hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Length of hose assembles. Length of hose assembles shall be measured in feet in accordance with A-A-59567. Examples: 080 for 80 feet and 250 for 250 feet.

Construction. Unless otherwise specified, coupling parts shall be as specified herein. The coupling shall be cast or machined from copper alloy (brass), steel, corrosion resistant steel, or zinc-base alloy (see table II and figure 1):

Tightening provisions. Female hex shall be a swivel nut.

Couplings. Couplings when attached to hose shall be able to withstand an internal hydrostatic pressure of 100 psi, for at least one minute without showing any signs of leakage.

Materials. Couplings shall be cast, forged, or machined, from one of the materials in table II.

TABLE II. Material types and designator.

Material designator code	Material
B	Copper alloy (brass)
S	Steel zinc plated
R	Corrosion resistant steel
Z 1/	Zinc-base alloy zinc plated

1/ A-A-59614/1 coupling assembly only.

Threads. Threads shall be NPT (national pipe thread) in accordance with FED-STD-H28/7, NPSH (National Pipe Straight Hose) in accordance with FED-STD-H28/10, NH (fire hose coupling) in accordance with FED-STD-H28/10, or GHT (garden hose thread) threads see table III. Threads are not interchangeable between types.

TABLE III. PIN codes for style, class, and type.


Class A coupling PIN code	Coupling CID	Style	Thread type	A-A-52506 clamp type designator (see figure 5)	Ferrule designator see table IV 1/
Class A					
7G1	A-A-59614/1	Hex short shank (1G)	3/4 GHT	A, B, C, D, E, F, G, H,	CA, R, or Z
7G3	A-A-59614/3	Hex or octagon long shank (1G)	3/4 GHT		
Class AA					
7W2	A-A-59614/1	Hex short shank (1W)	NH	A, B, C, D, E, F, G, H,	CA, R, or Z
7WS1	A-A-59614/1	Hex short shank (1WS)	NPSH		
7WG1	A-A-59614/1	Hex short shank (1WG)	3/4 NPT		
7W3	A-A-59614/3	Hex or octagon long shank (1W)	NH		
7WS3	A-A-59614/3	Hex or octagon long shank (1WS)	NPSH		
7WG3 2/	A-A-59614/3	Hex or octagon long shank (1WG)	3/4 GHT		

1/ Ferrule material see table V.
2/ Hose size 12 (3/4) only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

Gasket. Hose assemblies shall come with a gasket. Gasket material shall be suitable for the hose class for which it is intended, non-potable water or potable water.

Couplings type I styles 1and 3 (Octagon or hex swivel). Type I styles 1 and 3 couplings shall be in accordance with A-A-59614/1 (short shank) or A-A59614/3 (long shank), see figure 1 or 2.

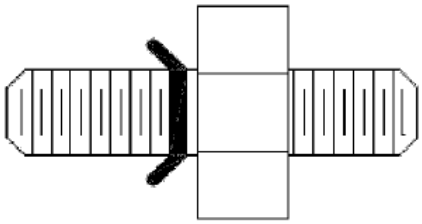

A-A-59614/1

FIGURE 1. Short shank style 1, type I, class A and AA.

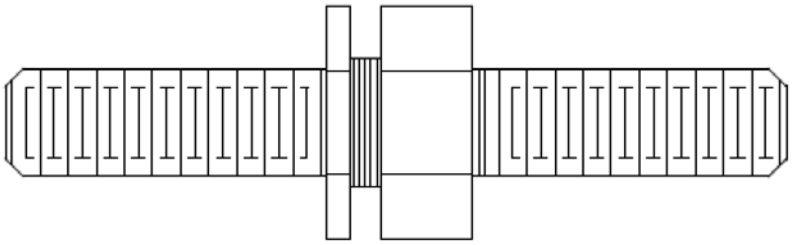


FIGURE 2. Long shank style 3, type I, class A or AA.

Hose clamps. Hose clamps shall be in accordance with A-A-52506 see figure 2 for types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

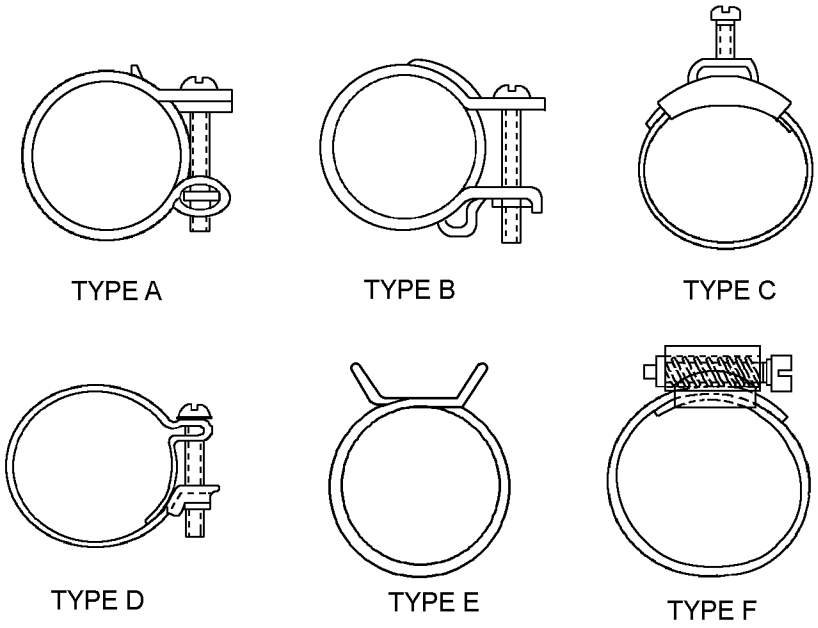


FIGURE 2. Hose clamp types.

Compression ferrule. Compression ferrule shall be in accordance with A-A-59614, see table IV for material designators.

TABLE IV. Ferrule material designators.

Designator	Material
CA	Copper alloy (brass)
R	Corrosion resistant steel
Z	Zinc-coated steel

Clamps and ferrules. Clamps or ferrules shall not extend closer than .062 inch to the end of the shank.
NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTIONS

A-A-52506	-	Clamps, Hose
A-A-59614	-	Coupling Assembly, Hose (Garden, Water, and Water Suction)
A-A-59614/1	-	Coupling Assembly, Hose (Garden, Water, and Water Suction), Short Shank with Octagon or Hex Swivel, Style 1, Type I
A-A-59614/3	-	Coupling Assembly, Hose (Garden, Water, and Water Suction), Long Shank with Octagon or Hex Swivel, Type I, Style 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

STANDARDS

FED-STD-H28/7	-	Screw-Thread Standards for Federal Services Section 7 Pipe Threads, General Purpose
FED-STD-H28/10	-	Screw-Thread Standards for Federal Services Section 10 Hose Coupling and Fire Hose Coupling Screw Threads

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
72661	Dixon Valve & Coupling Company 800 High Street Chestertown, MD 21 Sales@dixonvalve.com https://www.dixonvalve.com/
1U339	Labarge Products, Inc. 2900 Brannon Avenue St. Louis, MO 63139 Phone number: 1-314-776-2900 Fax number: 1-314-776-6444 sales@whsmithco.com www.labargepro.com
30659	Moon American Inc. 167-B SW Cutoff Worchester, MA 01604 Phone number: 1-507-798-8887 Fax number: 1-508-798-7839 sales@moon-american.com www.moon-american.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
DLA - CC

Review activities:
Navy - SA

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing activity:
DLA - CC

(Project 4720-2017-008)

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:18Z
Check the source to verify that this is the current version before use.