FED. SUP CLASS
9540

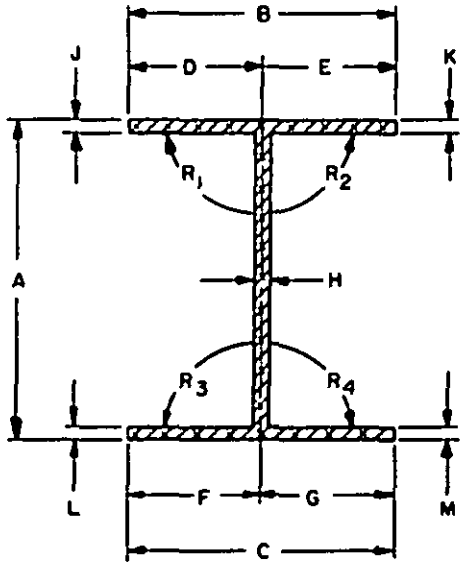

TABLE I. Basic dimensions.

PART NO.	A	B	C	D	E	F	G	H	J	K	L	M	R_1	R_2	R_3	R_4	TOTAL PCS
001	3.000	2.500	2.500	1.250	1.250	1.250	1.250	.125	.125	.125	.125	.125	90°	90°	90°	90°	4

REQUIREMENTS:

1. MATERIAL. Aluminum alloy 2024, (see Appendix A) as specified in QQ-A-200/6.

2. FINISH. Unfinished (see 3.).

3. PART NUMBER. The part number consists of the basic MS number, plus a hyphen, plus a dash number from TABLE I.

EXAMPLE: MS14383-001

- Dash number from TABLE I
- Hyphen (see punctuation 3)
- Basic MS number

4. MARKING. Aluminum and aluminum alloys shall be marked using the permanent mark or established trade mark, the basic number (military standard (MS) number plus the applicable dash number), and the last number and month marked shall be applied in accordance with MIL-STD-130.

NOTES:

1. All dimensions are in inches.

2. Unmarked radius of 1/64 in (.016 inch) maximum.

3. Hyphenated numbers shall be used in place of dash or hyphen when part is ordered, or identified for material, unless the procurement activity indicates otherwise. Hyphen and dash shall have the same meaning.

4. The listing of sources does not constitute a waiver of requirements of applicable procurement regulations.

APPROVED 30 April 1982 REVISED

P. A.	AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MR 99		I, BEAM, STYLE I ALUMINUM ALLOY 2024	MS14383
PROCUREMENT SPECIFICATION: QQ-A-200		SUPERSEDES:		PAGE 1 OF 1

DD FORM 1 NOV 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9540-0114

USER ACTIVITIES: NAVY-MC,OS,SH

REVIEWER ACTIVITIES: AIR FORCE-84 DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.