FED. SUP CLASS
3455

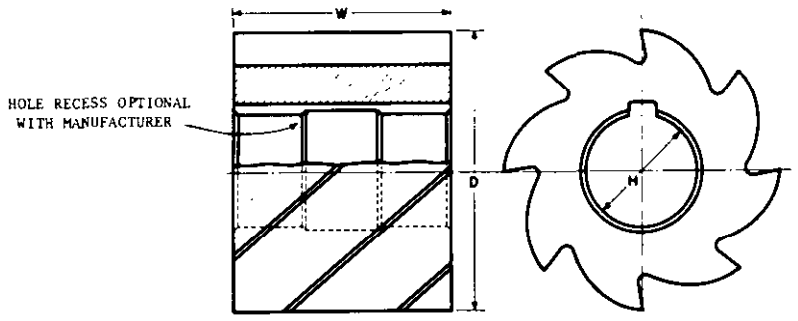

CUTTERS HAVE A HELIX ANGLE OF NOT LESS THAN 25° NOR GREATER THAN 45°.

DASH NO.	DIAMETER OF CUTTER (D) NOMINAL	WIDTH (W) NOMINAL	DIAMETER OF HOLE (H) NOMINAL
	INCHES	INCHES	INCHES
1	2-1/2	2	1
2	2-1/2	4	1
3	3	2	1-1/4
12	3	2-1/2	1-1/4
4	3	3	1-1/4
5	3	4	1-1/4
6	3	6	1-1/4
7	4	2	1-1/2
8	4	3	1-1/2
9	4	4	1-1/2
10	4	6	1-1/2
*11	4-1/2	6	2

*Dash number 11 is INACTIVE

NOTES:

1. TYPE, CLASS: Milling cutters shall conform to type I, class 2 of Specification GGG-C-755.
2. HELIX: Helix of cutters shall be left-hand only and not less than 25 nor greater than 45 degrees.
3. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS15688-1.
4. Referenced documents shall be of the issue in effect on date of invitations for bid.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

© **CANCELED** after 31 March 1981. For procurement use American National Standards Institute ANSI B94.19.

APPROVED 14 SEP 1954 REVISED (A) 9 APR 1957 (B) 2 DEC 1974 (C) 31 Mar 81

REVIEWER: GS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/2050

P.A. WC Other Cust 84	TITLE CUTTERS, MILLING, PLAIN, HEAVY DUTY	MILITARY STANDARD MS 15688
PROCUREMENT SPECIFICATION GGG-C-755	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. Project No. 3455-0062

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:50Z
Check the source to verify that this is the current version before use.