NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

FED SUP CLASS
5990

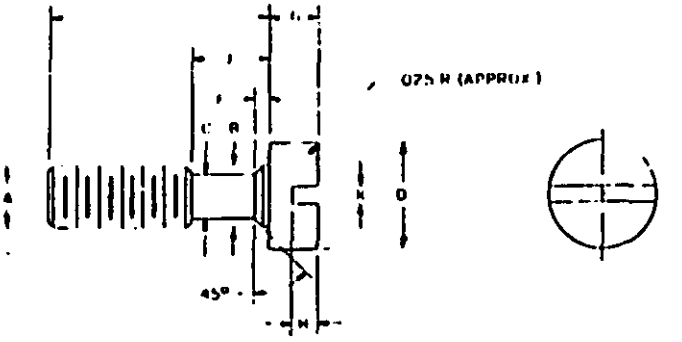

PART NUMBER	A NOMINAL SIZE	THREADS PER INCH	L LENGTH	B	C +.000 -.003	D	E	F	G	H	K
[illegible]	#8(.112)	8-32NF-2A	.312	.112	.040	.175	.156	.027	.090	.060	.038
MS 17184-3	#6(.138)	6-32NF-2A	.500	.138	.101	.239	.141	.032	.113	.060	.082

MATERIAL: STEEL, Corrosion Resisting, Federal Standard 66, AISI-302or303, SAE-30302 or 30303.

PROTECTIVE TREATMENT: Corrosion Resisting Steel shall be passivated.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

DIMENSIONS: All Dimensions are in inches unless otherwise specified.

TOLERANCES: Unless otherwise specified,
Decimal ±.005
Angles ±1°

WORKMANSHIP: Break edges .010-.015 Radius, Inside corners .010 Radius max.

NOTES:
(a) This Standard takes precedence over documents referenced herein.
(b) Referenced documents shall be of the issue in effect on date of invitations for bids.

APPROVED 20 SEPT 1960 REVISED

P.A. VEP Other Cust	TITLE SCREW, EXTERNALLY RELIEVED BODY (SYNCHRO)	MILITARY STANDARD MS17184(Wep)
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.