FED. SUP CLASS 4130

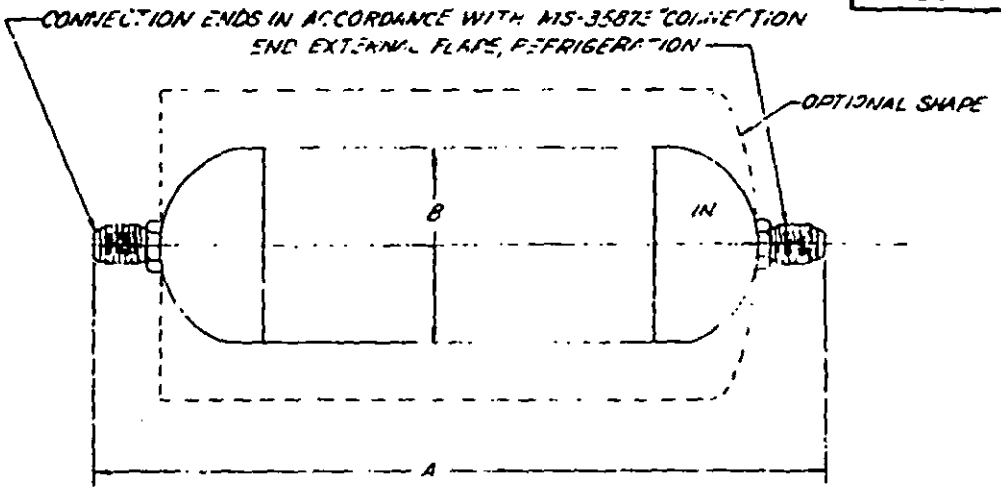

MS PART NO.	DIMENSIONS		FLARE CONNECTION SIZE	SCREEN AREA	APPROX LIQUID (R12) RATING
	A ± 1/2	B (MAX.)			
	INCHES	INCHES	INCHES	SQ INCHES	T.R.
17242-1	4 5/8	2 3/16	3/8	10	1 TO 3
17242-2	5 1/8	2 3/16	1/2	10	2 TO 4
17242-3	7 1/8	2 3/16	5/8	20	4 TO 10

(8) NOTES

RATING CONDITIONS: STRAINERS SHALL BE OF SUFFICIENT CAPACITY AND SCREEN AREA TO PASS 1.0 POUNDS PER MINUTE OF LIQUID REFRIGERANT 12 MULTIPLIED BY THE STRAINER TR RATING WITHOUT A PRESSURE DROP IN EXCESS OF 2 POUNDS PER SQUARE INCH.

MATERIALS: SHELL-COPPER, BRASS, OR STEEL CORROSION-RESISTANT TREATED.

SCREEN-CORROSION-RESISTING STEEL OR MONEL IN ACCORDANCE WITH TYPE I, CLASS I, WIRE DIAMETER 0.0055 or 0.0045 OF RR-W-360.

STRENGTH: CONFORM TO UL 207C.

STRAINERS SHALL BE OF THE LIQUID AND GAS, STRAIGHT-THROUGH, NON-CLEANABLE, THROW-AWAY TYPE.

DIMENSIONS: "A" - MAY BE ATTAINED ON SHORTER UNITS BY USE OF AN ADAPTER OR EXTENSION SUPPLIED WITH THE UNIT AND HAVING THE SAME TYPE END CONNECTION.

"B" - MAXIMUM SHELL DIAMETER IS NOT INTENDED TO PRECLUDE STRAINERS HAVING WELDED BEADS AROUND THE CIRCUMFERENCE OF THE SHELL IN EXCESS OF DIAMETER SHOWN.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

APPROVED 20 FEB 1961 REVISED (8) 13 JAN 1971

Revise Army - ME

This Military standard is mandatory for use by all Department and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A	TITLE	MILITARY STANDARD
Other Cust: ARMY - GL, NAVY - YD, USAF - 82	STRAINER, SEDIMENT, REFRIGERANT-12	MS 17242
PROCUREMENT SPECIFICATION A'L-S-22033	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Considered) MS1125

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.