FED SUP CLASS
4130

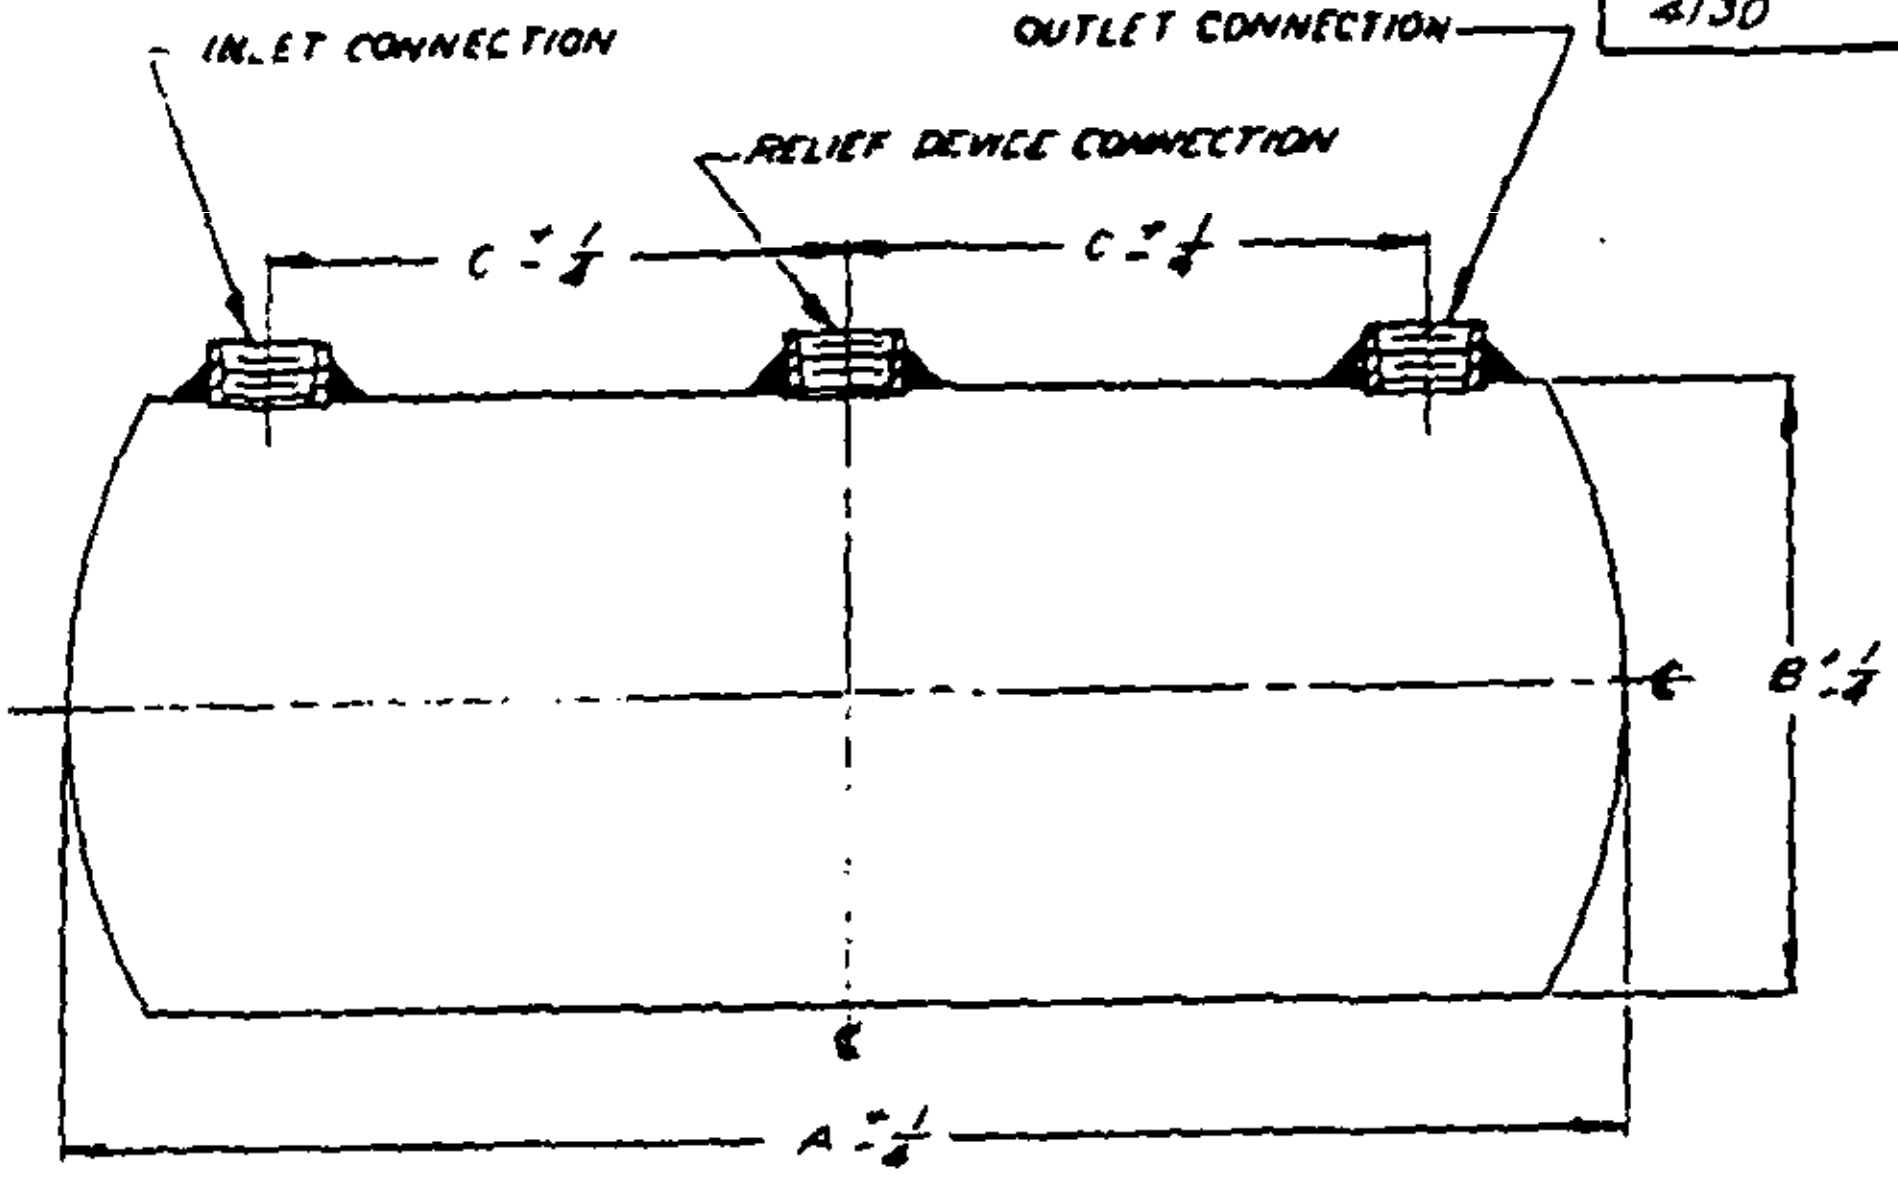

Ⓒ DASH NO.	CAPACITY (MIN)	DIMENSIONS			CONNECTIONS NPTF			CAPACITY OF R12 AT 135°F
		A (OVERALL)	B (OUT DIA)	C	INLET	OUTLET	RELIEF DEVICE	
	CU IN	INCHES	INCHES	INCHES				POUNDS
-1	200	$12\frac{1}{2}$	5	3	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{8}$	7.5
-2	350	16	6	4	$\frac{1}{2}$			14
-3	450	20	6	6	$\frac{1}{2}$			18
-4	550	24	6	8	$\frac{1}{2}$			22
-5	1300	$26\frac{1}{2}$	$10\frac{3}{8}$	10	$\frac{3}{4}$			70 Ⓒ

NOTES

1. MATERIAL - STEEL
2. Ⓒ DESIGN WORKING PRESSURE - 300 P.S.I.G.
3. [illegible] A. PARTS NO. 1, 2, 3, and 4, IN ACCORDANCE WITH UL STANDARD 207C OR ASME UNFIRED PRESSURE VESSEL CODE.
   B. PART NO. 5 IN ACCORDANCE WITH ASME UNFIRED PRESSURE VESSEL CODE.
4. CONNECTIONS - IN INCHES IN ACCORDANCE WITH MS 39926.
5. FINISH - TREATED TO RESIST CORROSION.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. Ⓒ PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17291-1.

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

REVIEW 1520
Army - MO Army - CE
DSA - GS Navy - MC

APPROVED 1 JUNE 1961 REVISED Ⓡ 8 MAR 1971 Ⓒ 16 MAY 1975

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE RECEIVERS, LIQUID REFRIGERANT 12	MILITARY STANDARD MS 17291
PROCUREMENT SPECIFICATION MIL-R-[illegible]	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:06Z
Check the source to verify that this is the current version before use.