INCH-POUND

MS21106B
20 MAY 2010
SUPERSEDING
MS21106A
2 December 1970

DETAIL SPECIFICATION SHEET

CLAMP, LOOP, CUSHIONED, 1200 DEG. F., CRES TYPE IV, CLASS B

Inactive for new design after 16 June 1997

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification, MIL-C-8603.

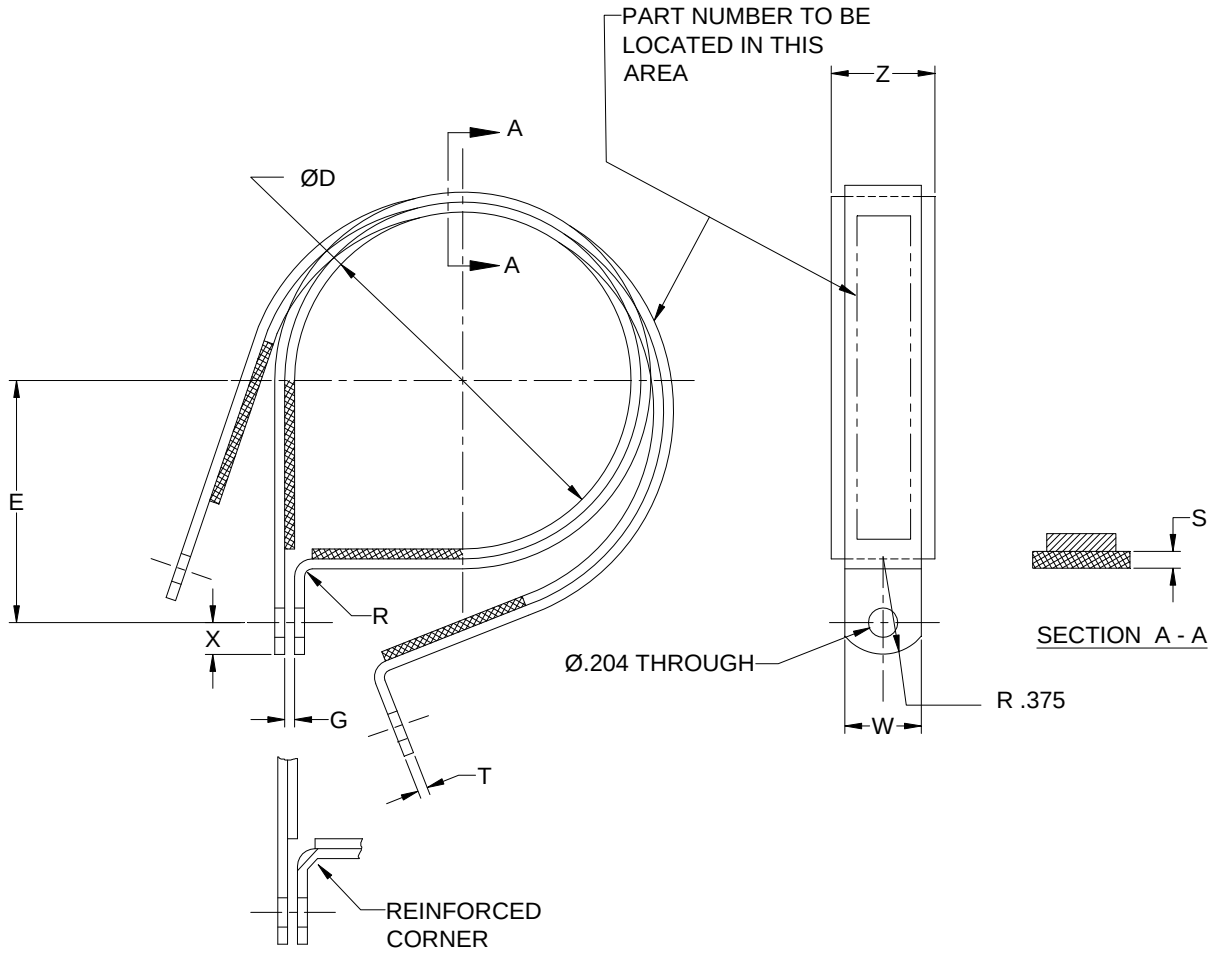

FIGURE 1. Clamp

AMSC N/A

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

PART NUMBER	RIGID TUBE NOMINAL OD (REF)	∅D ±.015	E ±.015	G	R ±.016 RAD	S +.016 -.000	T	W ±.015	X ±.015	Z MAX
MS21106-2	1/8	.125	.457	.062 +.016 -.000	.062	.062	.0320 ±.0035	.375	.188	.497
MS21106-3	3/16	.188	.498							
MS21106-4	1/4	.250	.529							
MS21106-5	5/16	.313	.560							
MS21106-6	3/8	.375	.592							
MS21106-7	7/16	.438	.623							
MS21106-8	1/2	.500	.654							
MS21106-9	9/16	.563	.749		.109			.500	.218	.622
MS21106-10	5/8	.625	.780							
MS21106-11	11/16	.688	.811							
MS21106-12	3/4	.750	.842							
MS21106-13	13/16	.813	.858							
MS21106-14	7/8	.875	.889							
MS21106-15	15/16	.938	.920							
MS21106-16	1	1.000	.951							
MS21106-17	1-1/16	1.063	.983							
MS21106-18	1-1/8	1.125	1.030	.094 +.031 -.000	.125					.656
MS21106-19	1-3/16	1.188	1.061							
MS21106-20	1-1/4	1.250	1.092							
MS21106-21	1-5/16	1.313	1.124							
MS21106-22	1-3/8	1.375	1.155							
MS21106-23	1-7/16	1..438	1.186							
MS21106-24	1-1/2	1.500	1.217							
MS21106-25	1-9/16	1.563	1.259							
MS21106-26	1-5/8	1.625	1.280							
MS21106-27		1.688	1.312							
MS21106-28	1-3/4	1.750	1.342							
MS21106-29		1.813	1.374							
MS21106-30	1-7/8	1.875	1.405							
MS21106-31		1.938	1.444	.125 +.031 -.000			.040 ±.004			
MS21106-32	2	2.000	1.475							
MS21106-33		2.062	1.507							
MS21106-34	2-1/8	2.125	1.538							
MS21106-35		2.188	1.570							
MS21106-36	2-1/4	2.250	1.600							
MS21106-37		2.312	1.631							
MS21106-38	2-3/8	2.375	1.663							
MS21106-40	2-1/2	2.500	1.728							
MS21106-42		2.625	1.788							
MS21106-43		2.688	1.820							
MS21106-44	2-3/4	2.750	1.851							
MS21106-45		2.812	1.882							
MS21106-46		2.875	1.913							
MS21106-48	3	3.000	1.976							
MS21106-50		3.125	2.038							
MS21106-52	3-1/4	3.250	2.101							
MS21106-54		3.375	2.163							
MS21106-56	3-1/2	3.500	2.226							
MS21106-58		3.625	2.288							
MS21106-64	4	4.000	2.476							
MS21106-66		4.125	2.538							

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.

NOTES.

1. Clamp band - Corrosion resistant steel Type 321 in accordance with SAE AMS 5510, annealed.
   Cushion - Corrosion resistant steel Type 321 or 347 in accordance with SAE AMS 5510 or SAE AMS 5512.
2. Protective Treatment: Passivate in accordance with SAE AMS 2700.
3. Remove all burrs and sharp edges.
4. Dimensions are in inches. Unless otherwise specified, tolerances decimals +.015.
5. Dimension “D” is applicable in closed position only..
6. The MS part number, including dash number, and manufacturer’s identification, shall be marked on each clamp.
7. Clamps shall be furnished in the open position.
8. Method of cushion attachment to band is optional.
9. Reinforced corner is mandatory.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
11. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AV
Navy - AS
Air Force – 99

Preparing activity:
DLA – IS

(Project 5340-2010-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:27Z
Check the source to verify that this is the current version before use.