FED. SUP CLASS.
1660

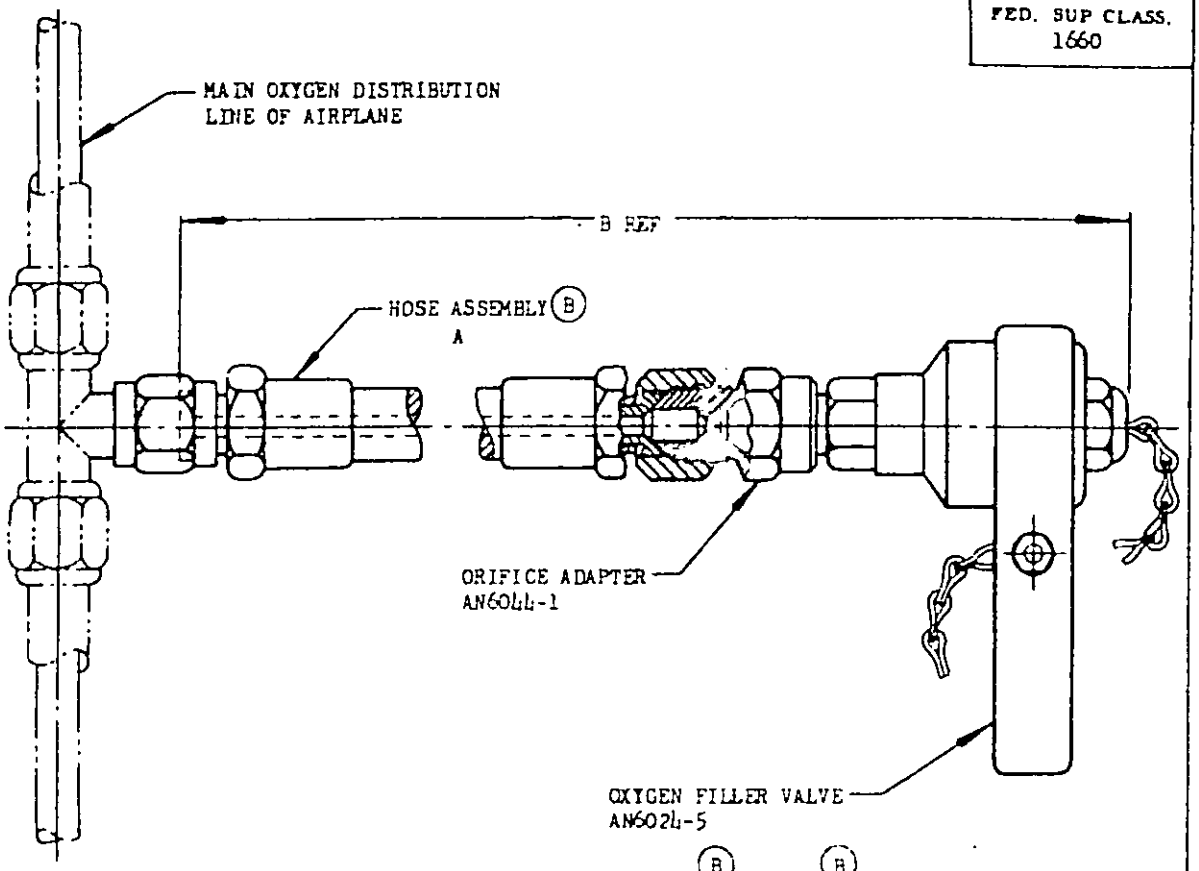


| DASH NO. | A (B) | B (B) |
|---|---|---|
| -1 | MS24548-5-24 | 27.625 |
| -2 | MS24548-5-18 | 21.625 |

DIMENSIONS IN INCHES.

ALL PARTS SHALL BE CLEAN, DRY AND FREE FROM OIL, GREASE, AND OTHER FOREIGN SUBSTANCES.

ASSEMBLY MUST BE LEAKPROOF WITH 400 POUNDS PER SQUARE INCH OXYGEN PRESSURE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 28 Oct. 57 REVISED (A) 25 OCT 62 (B) 20 Apr. 65

Review activities:
Navy - WP
USAF - 11, 71

This standard has been approved by the Department of the Air Force and the Bureau of Naval Weapons.

| P.A. Navy - WP; Other Cust USAF - 11 | TITLE: RECHARGER ASSEMBLY, PORTABLE OXYGEN | MILITARY STANDARD MS22032 (ASG) |
|---|---|---|
| Procurement Specification NONE | SUPERSEDES: AN6041 | SHEET 1 OF 1 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.