FED. SUP CLASS.
6140

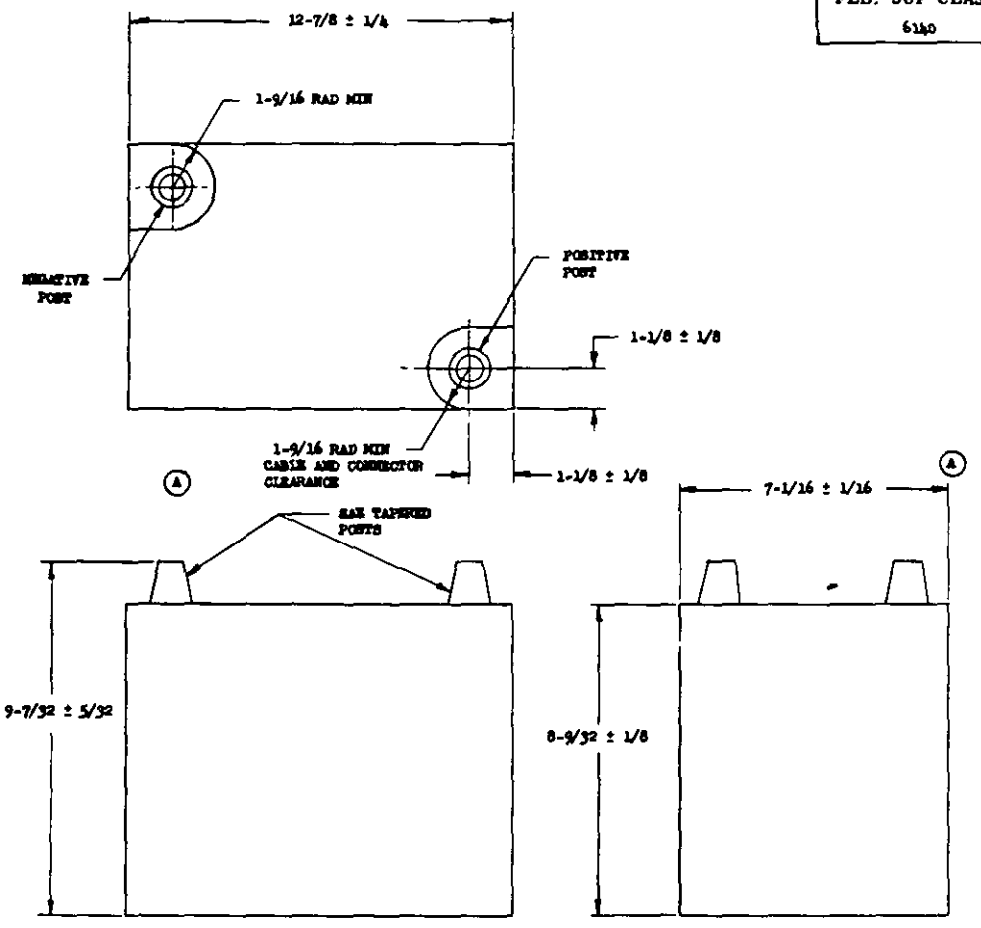

MS PART NO.	FIG	NO. OF CELLS	NOMINAL VOLTAGE	AMP-HOUR CAPACITY 5-HOUR RATE	CRANKING ABILITY MINIMUM TIME (MINUTES) DISCHARGE RATE 450 AMPS -40° F	CRANKING ABILITY MINIMUM TIME (MINUTES) DISCHARGE RATE 450 AMPS 77° F	CRANKING ABILITY MINIMUM 5 SECOND VOLT -40° F	LIFE CYCLE MINIMUM CYCLES	OVERCHARGE MINIMUM CYCLES
MS24546-1		5	6	125	3.0	10.0	4	300	14

INTERCELL CONNECTORS TO BE COVERED WITH FLAT SMOOTH SURFACE.

VENT PLUGS TO BE FLUSH WITH TOP OF CELL COVER.

DIMENSIONS IN INCHES.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓑ CANCELLED

THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT DEPARTMENT. ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE.

APPROVED 12 DEC 58 REVISED Ⓐ 26 MAR 59 Ⓑ 24 NOV 72

CUSTODIANS	OTHER INT.
Air Force	A -
	N -
	AF -

MILITARY STANDARD

BATTERY, STORAGE, NICKEL-CADMIUM, 125-AMP HR, 6 VOLT

Ⓐ

MS24546 (USAF)

Procurement Specification MIL-B-26509

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672
1 OCT 52

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-539/2657 GPO 823757

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T14:56Z
Check the source to verify that this is the current version before use.