FED. SUP CLASS
5315

MS9848 (ASG)

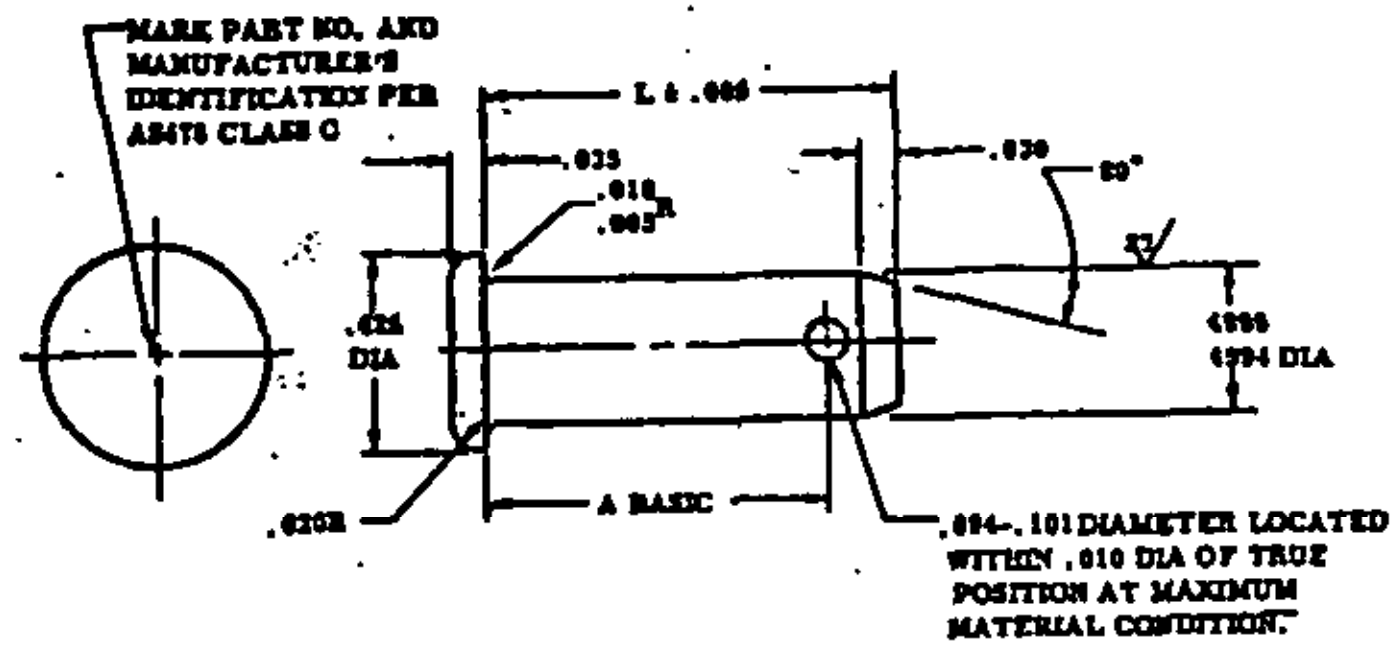

MARK PART NO. AND MANUFACTURER'S IDENTIFICATION PER AS478 CLASS C
L ± .005
.035
.010 .005 R
.030
30°
32
.625 DIA
.4998 .4994 DIA
.020R
A BASIC
.094-.101 DIAMETER LOCATED WITHIN .010 DIA OF TRUE POSITION AT MAXIMUM MATERIAL CONDITION.

PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100	PART NO.	A	L	APPROX WEIGHT LB/100
				MS9848-21	1.267	1.354	7.670	MS9848-36	2.204	2.291	12.850
				MS9848-22	1.329	1.416	8.000	MS9848-37	2.267	2.354	13.200
				MS9848-23	1.392	1.479	8.370	MS9848-38	2.329	2.416	13.530
				MS9848-24	1.454	1.541	8.710	MS9848-39	2.391	2.478	13.890
				MS9848-25	1.517	1.604	9.050	MS9848-40	2.454	2.541	14.210
				MS9848-26	1.579	1.666	9.400	MS9848-41	2.517	2.604	14.580
				MS9848-27	1.642	1.729	9.750	MS9848-42	2.579	2.666	14.920
				MS9848-28	1.704	1.791	10.090	MS9848-43	2.642	2.729	15.220
MS9848-09	.517	.604	3.630	MS9848-29	1.767	1.854	10.440	MS9848-44	2.704	2.791	15.610
MS9848-10	.579	.666	3.970	MS9848-30	1.829	1.916	10.790	MS9848-45	2.767	2.854	15.960
MS9848-11	.642	.729	4.280	MS9848-31	1.892	1.979	11.120	MS9848-46	2.829	2.916	16.310
MS9848-12	.704	.791	4.570	MS9848-32	1.954	2.041	11.470	MS9848-47	2.892	2.979	16.630
MS9848-13	.767	.854	4.910	MS9848-33	2.017	2.104	11.820	MS9848-48	2.954	3.041	16.990
MS9848-14	.829	.916	5.250	MS9848-34	2.079	2.166	12.160	MS9848-49	3.017	3.104	17.340
MS9848-15	.892	.979	5.600	MS9848-35	2.142	2.229	12.490				
MS9848-16	.954	1.041	5.940								
MS9848-17	1.017	1.104	6.290								
MS9848-18	1.079	1.166	6.630								
MS9848-19	1.142	1.229	6.980								
MS9848-20	1.204	1.291	7.320								

NOTES:
1. MATERIAL: AMS 6418.
2. HARDNESS: ROCKWELL C40-50.
3. FLUORESCENT PENETRANT INSPECTION PER AMS2645.
4. HEAD DIA TO BE CONCENTRIC WITH SHANK DIA, WITHIN .003 FIR.
5. SURFACE TEXTURE: ASA B46.1 1962, UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
6. BREAK SHARP EDGES .003-.015.
7. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±4°
8. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: USAF - 82, 85

APPROVED 29 Feb 68 REVISED

P.A. USAF- 11 Other Cust NAVY- AS	TITLE PIN, STRAIGHT, HEADED .4999 DIAMETER, AMS6418	MILITARY STANDARD MS9848 (ASG) SHEET 1 OF 1
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	

DD FORM 1 MAY 63 672-1 (Limited coordination ASG use only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.