MILITARY SPECIFICATION SHEET

SWITCH, TOGGLE, POSITIVE BREAK, FOUR POLE, MINIATURE, SEALED, SOLDER LUG, WITH OR WITHOUT LEVER LOCK, .469 OR .250 INCH MOUNTING BUSHING

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8834.


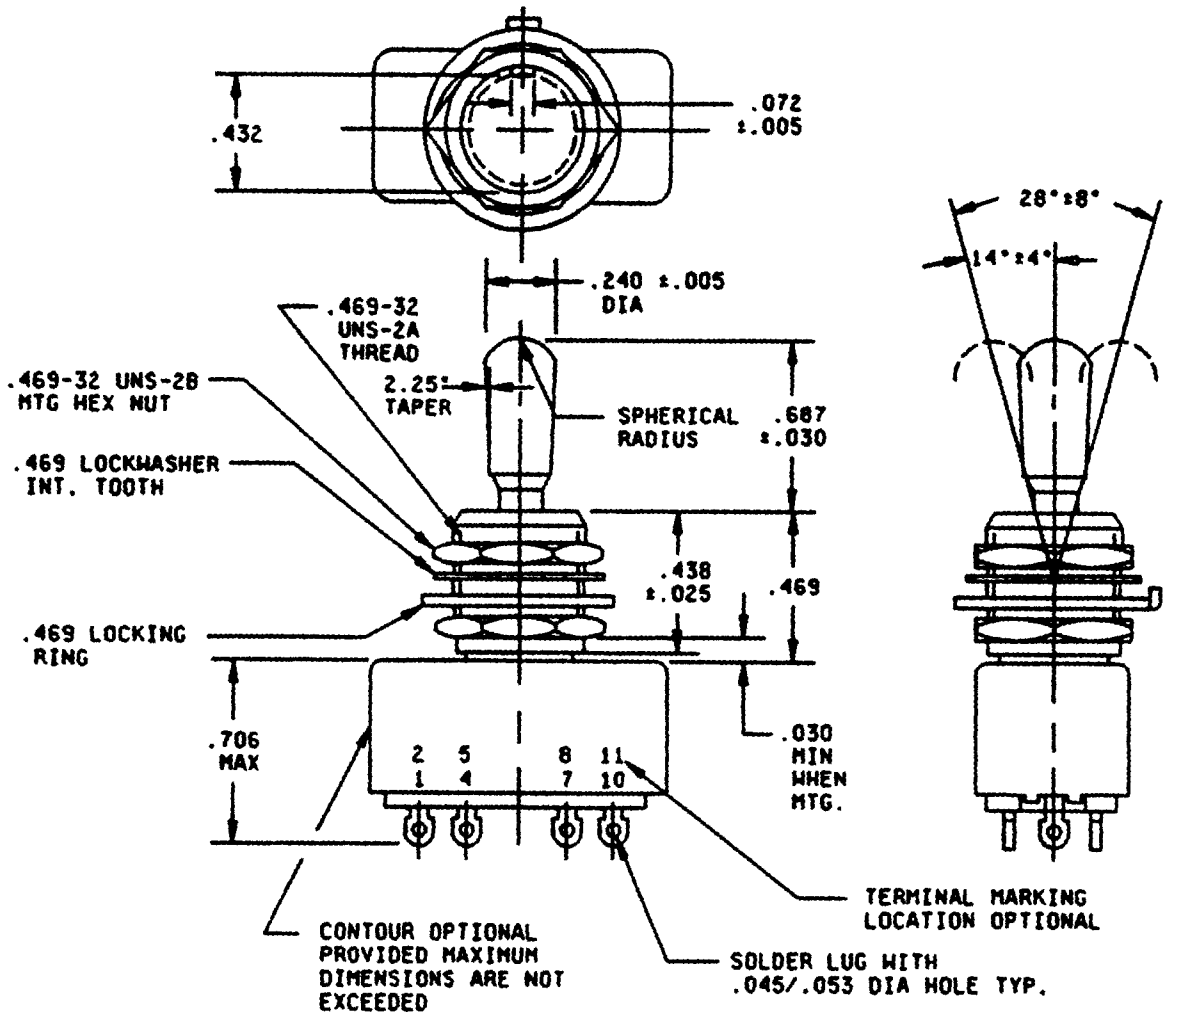


FIGURE 1. Switches with .469 inch mounting bushing.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

LOCKING LEVER STYLE I

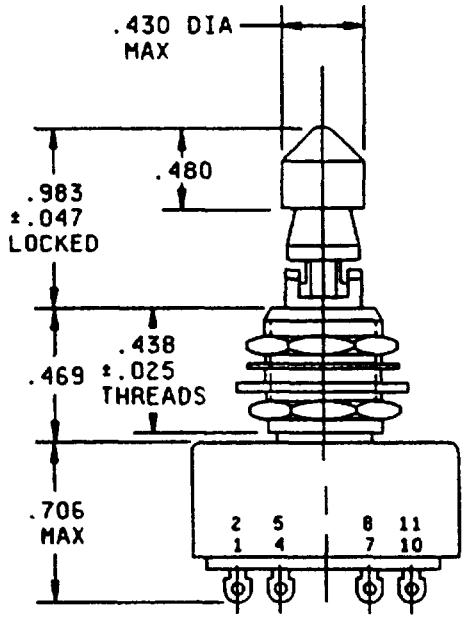

LOCKING LEVER STYLE II

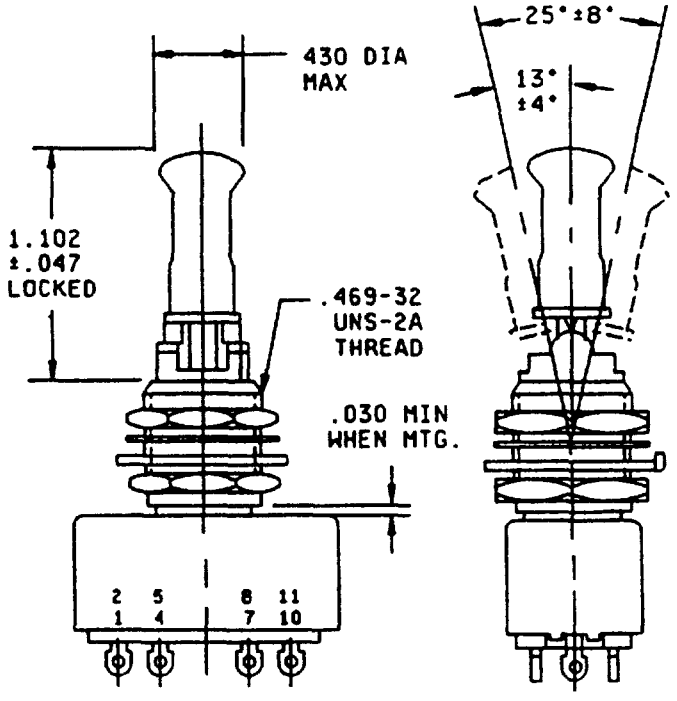

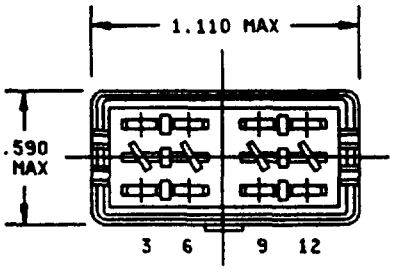

Inches	mm	Inches	mm
.005	0.13	.432	10.97
.010	0.25	.438	11.13
.012	0.30	.469	11.91
.025	0.64	.480	12.19
.030	0.76	.590	14.99
.045	1.14	.687	17.45
.047	1.19	.706	17.93
.053	1.35	.983	24.97
.072	1.83	1.102	27.99
.240	6.10	1.110	28.19
.430	10.92		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 for decimals and ±.5° for angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. Nonfunctional terminals shall not be supplied.

FIGURE 1. Switches with .469 inch mounting bushing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.


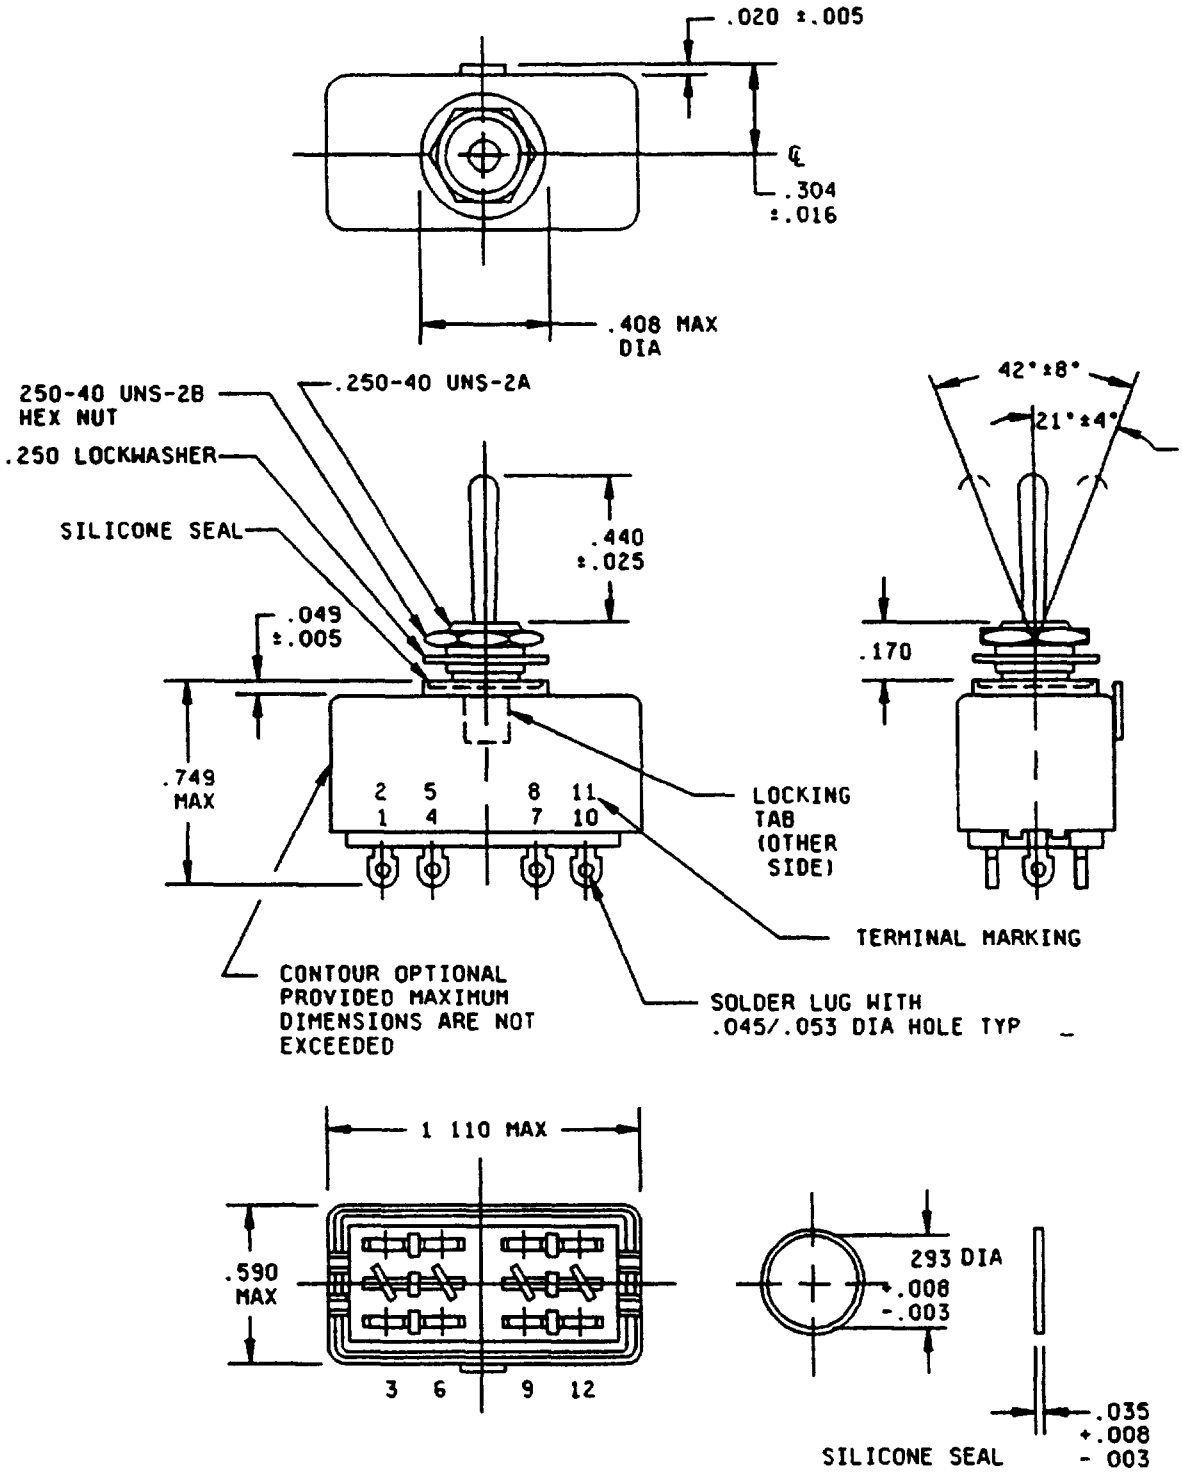


FIGURE 2. Switches with .250 inch mounting bushing

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

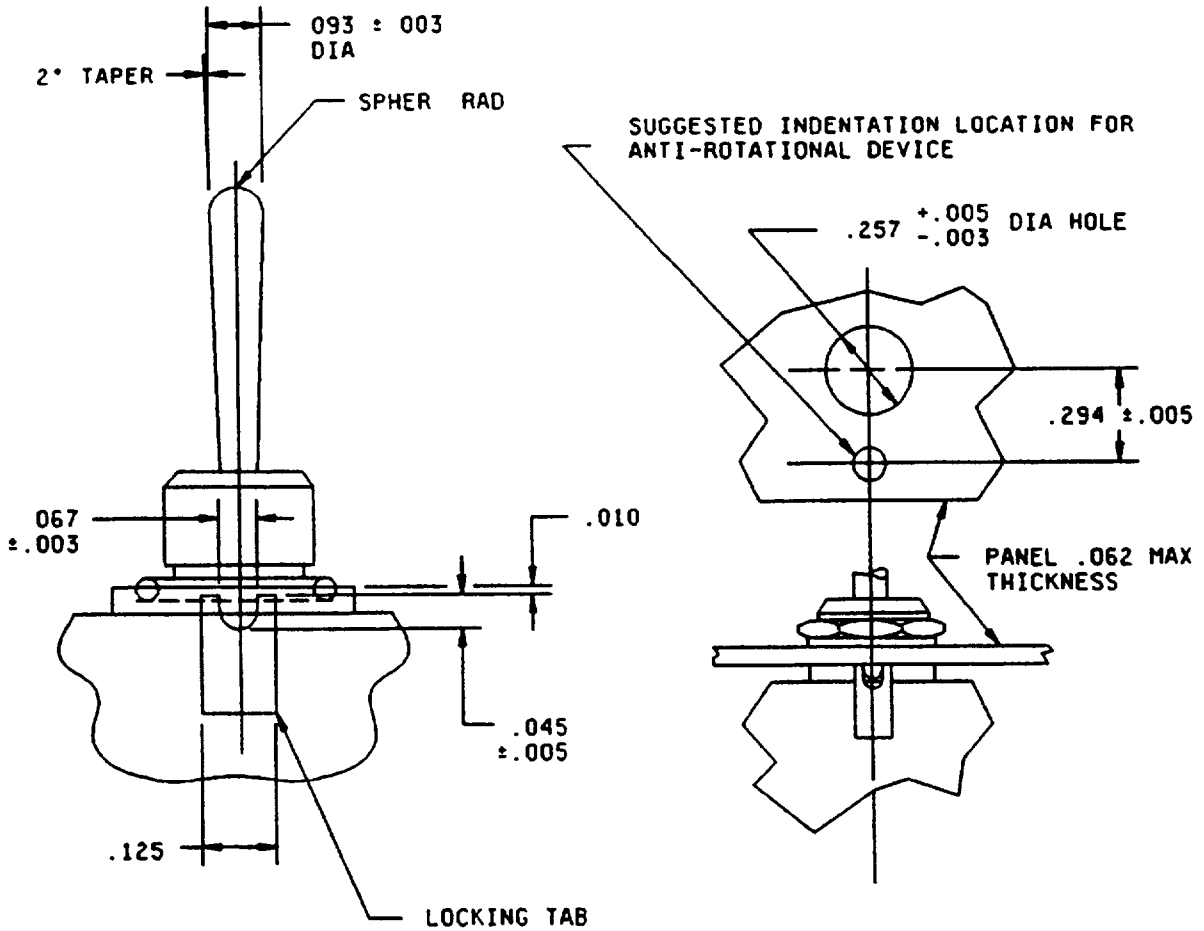

Inches	mm	Inches	mm	Inches	mm
.003	0 08	.049	1.24	.294	7 47
.005	0.13	.062	1 57	.304	7.72
.008	0 20	.067	1.70	.408	10.36
.010	0.25	.093	2.36	440	11.18
016	0 41	.125	3 18	.590	14.99
.020	0 51	170	4 32	.749	19.02
.025	0.64	.250	6 35	1.110	28 19
.035	0.89	.257	6.53		
.045	1 14	.293	7.44		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 010 for decimals and ±.5° for angles
4. For hardware detail specifications see appendix of MIL-S-8834.
5. Nonfunctional terminals shall not be supplied

FIGURE 2 Switches with .250 inch mounting bushing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction. See figures 1 and 2 For switches with center-on circuits, the nonteasable requirement is not applicable; delayed action of the toggle lever may cause circuit to close or open before snap action occurs.

Switching characteristics: See table I Direction of the movement of internal mechanism is opposite to the direction of the toggle lever movement.

Weight:
.469 bushing, standard lever: .06 pound maximum
.469 bushing, locking lever: .074 pound maximum.
.250 bushing: .035 pound maximum.

Strength of terminals: Applied force shall be 5 pounds minimum normal to the mounting plane and 2 pounds minimum in other planes.

Strength of actuating-lever pivot and lever stop.

Switches with .250 inch mounting bushing: Applied force shall be 6 pounds.

Dielectric withstanding voltage:

At atmospheric pressure. For switches with center-on circuits, dielectric withstanding test voltage shall be 1,200 V rms at sea level.

At reduced barometric pressure. Switches shall be tested in accordance with MIL-STD-202, method 105, test condition B (50,000 feet).

Shock: Method I (100 g's, sawtooth).

Sealing. Test in accordance with MIL-STD-202, test method 112, test condition B, except use tap water instead of silicone oil and an absolute pressure of 2 ±0.5 inches of mercury instead of 1.5 inches maximum. A continuous stream of bubbles is defined as 2 or more bubbles present in the water at the same time and originating from the same location on the switch.

Electrical endurance: Altitude tests are to be conducted while at a pressure equivalent of 50,000 feet.

Resistive loads:
28 V dc: 5 amperes.
115 V ac, 400 Hz: 3 amperes
115 V ac, 60 Hz: 2 amperes at room temperature and pressure only.

Inductive loads.
28 V dc 1 ampere with time constant of .020 ±.002 seconds.
115 V ac, 400 Hz: 2 amperes.
115 V ac, 60 Hz: 1 ampere at room temperature and pressure only.

Electrical life, low level switching Contact resistance shall not exceed 50 ohms on any single contact closure

Contact load: Each switch contact shall make, carry, and break a resistive load of 25 microamperes maximum at an open circuit voltage of 5 millivolts dc maximum.

Monitoring circuit. Monitoring equipment shall provide a record of the number of cycles and shall record failures or discontinue the test if a failure occurs. Each contact closure shall be monitored.

Samples for qualification and group B inspection, group submission for approval of all PIN's

Basic switches M8834/01-274 and -222E

Other switches: M8834/01-211 and -213A

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) M8834/01- 27 2 F

Circuit number (see table I)

Switch type
- 1 - .469 bushing, standard lever
- 2 - 469 bushing, locking lever style I
- 3 - 469 bushing, locking lever style II
- 4 - 250 bushing, thin lever

Lever locking configuration (see table I and figure 3, omit if not applicable)

Example: M8834/01-272F

TABLE I Switching characteristics.

Circuit number	Circuits made between terminals as indicated with the toggle lever in these positions			Available lever locking configurations (see figure 3)
	Opposite keyway side	Center position	Keyway side	
21	2-3, 5-6 ON 8-9, 11-12	OFF	1-2, 4-5 ON 7-8, 10-11	A, B, D
22	2-3, 5-6 ON 8-9, 11-12	NONE	OFF	C, E
23	2-3, 5-6 ON 8-9, 11-12	NONE	1-2, 4-5 ON 7-8, 10-11	C, E
24	2-3, 5-6 ON 8-9, 11-12	OFF	NONE	B, J
27	2-3, 5-6 MOM ON 8-9, 11-12	OFF	1-2, 4-5 MOM ON 7-8, 10-11	F, H
28	NONE	OFF	1-2, 4-5 MOM ON 7-8, 10-11	K
31	2-3, 5-6 ON 8-9, 11-12	OFF	1-2, 4-5 MOM ON 7-8, 10-11	G, K, L
34 1/	2-3, 5-6 ON 8-9, 11-12	2-3, 4-5 ON 7-8, 11-12	1-2, 4-5 ON 7-8, 10-11	A, B, C, D
35 1/	2-3, 5-6 ON 8-9, 11-12	2-3, 4-5 ON 7-8, 11-12	1-2, 4-5 MOM ON 7-8, 10-11	G, K, L
36 1/	2-3, 5-6 MON ON 8-9, 11-12	2-3, 4-5 ON 7-8, 11-12	1-2, 4-5 MOM ON 7-8, 10-11	F, H
37 1/	NONE	2-3, 5-6 ON 8-9, 11-12	1-2, 4-5 MOM ON 7-8, 10-11	K

1/ The nonteasable requirement is not applicable to switches with center-on circuits

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

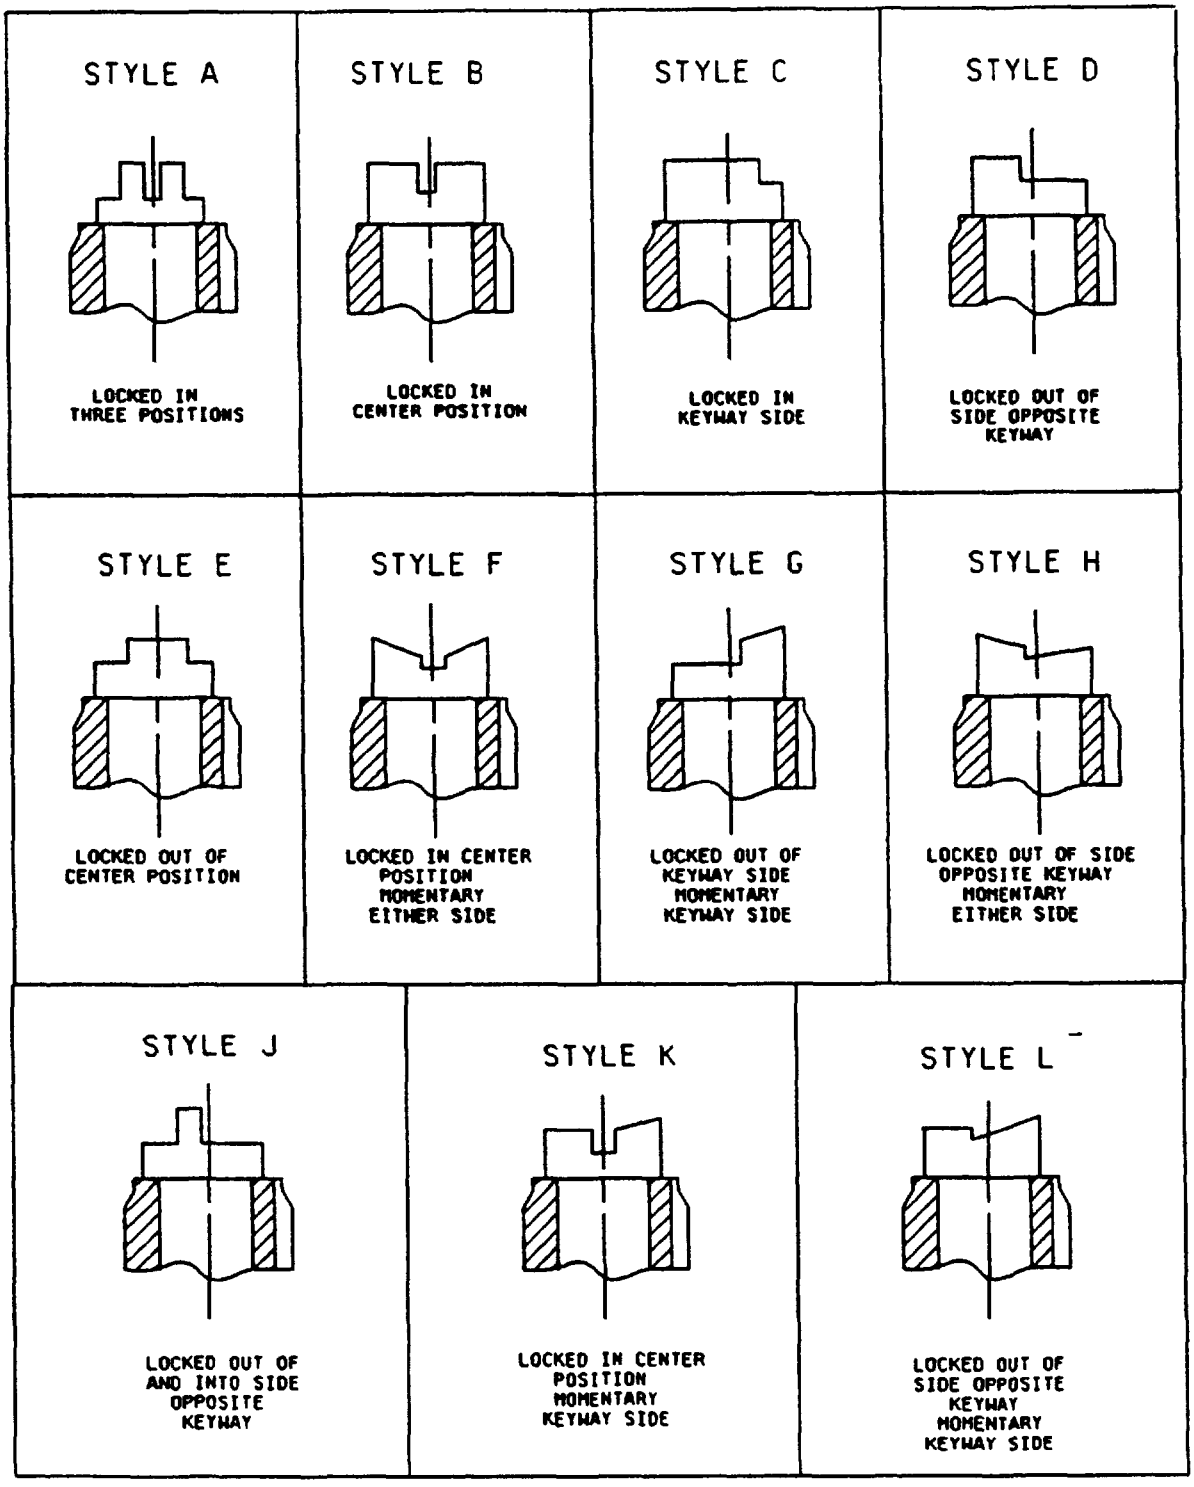


FIGURE 3 Lever locking configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian
Air Force - 85

Review activities
Air Force - 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5930-F729)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:34Z
Check the source to verify that this is the current version before use.