MIL-T-8823B
16 December 1969
SUPERSEDING
MIL-T-8823A(ASG)
15 February 1963

MILITARY SPECIFICATION

TRAINING AIDS, AIRCRAFT, NAVAL VESSEL, OR MISSILE SYSTEMS, ANIMATED PANEL, GENERAL SPECIFICATION FOR

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for animated panel training aids that depict various aircraft, naval vessels, or missile systems and components.

1.2 Classification. The training aids shall be furnished in the following types as specified (see 3.3 and 6.2):

Type I - Two or three panels hinged together for presentation as a unit

Type IA - Variation of the type I, two panels hinged vertically

Type II - Individual panels presented singly or in groups.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

L-P-516	Plastic Sheet and Plastic Rod, Thermosetting, Cast
W-C-375	Circuit Breaker, Molded Case, Branch-Circuit and Service
W-F-791	Fuse, Cartridge and Fuse, Plug
W-L-111	Lamp, Incandescent, (Electric, Miniature, Tungsten-Filament)
NN-P-530	Plywood, Flat-Panel
TT-L-20	Lacquer Camouflage
PPP-B-601	Boxes, Wood, Cleated-Plywood

FSC 6910

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the current version before use.

Military

MIL-M-14	Molding Plastics and Molded Plastic Parts, Thermosetting
MIL-T-27	Transformers and Inductors (Audio, Power, and High Power Pulse) General Specification for
MIL-P-116	Preservation, Methods of
MIL-T-4782	Transparencies, Technical Training, General Specification for
MIL-W-5086	Wire, Electrical, 600-Volt, Copper, Aircraft
MIL-W-5088	Wiring, Aircraft, Installation of
MIL-C-5756	Cable and Wire, Power, Electric, Portable
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-W-8939	Welding, Resistance, Electronic Circuit Modules
MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-17	Mechanical Symbols for Aeronautical, Aerospace and Spacecraft Use Part 2
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of US Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-808	Finishes, Protective, and Codes, for Finishing Schemes for Ground and Ground Support Equipment
MIL-STD-831	Test Reports, Preparation of
MIL-STD-889	Dissimilar Metals
MIL-STD-1472	Human Engineering Design Criteria for Military Systems, Equipment and Facilities

PUBLICATION

Air Force-Navy Aeronautical Bulletin

No. 261	Abbreviations and Contractions for Use on Airborne Equipment; Approved List of

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currenversion before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

The National Fire Protection Association

Pamphlet 70 National Electrical Code (Electric Wiring and Apparatus)

(Copies may be obtained from The National Fire Protection Association, 60 Batterymarch Street, Boston, Massachusetts 02110.)

National Electrical Manufacturers Association

Bulletin NEMA-LPI-1951 Laminated Plastics

(Copies of this publication may be obtained from the National Electrical Manufacturers Association, 155 East 44th Street, New York, New York 10017.)

ASA C73.1-1957 Outlet Receptacle, Attachment Plug Caps and Appliance Plugs
USAS Y32.2 Graphic Symbols for Electrical and Electronics Diagrams

(Copies of these publications may be obtained from the United States of America Standards Institute, 10 East 40th Street, New York, New York 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Preproduction testing. This specification makes provisions for preproduction testing (see 4.3 and 6.2).

3.2 Selection of specifications and standards. Specifications and standards for necessary materials and parts not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Selection. Type I and type IA presentations will be specified for systems that depict primarily mechanical movement and, when illuminated, electrical current, gas, or fluid flow. Type IA presentations are particularly adaptable for displaying systems that make use of illumination techniques. Type II presentations will generally be specified for complex systems that lend themselves to presentation as a group of subsystems or components. Type II presentations may also be specified for single-panel displays of small systems or components. When operating instructions or wiring diagrams, or both, are required to be mounted in the training aids, this shall be specifically provided for in the individual training aid specification.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the currentversion before use.

3.4 Materials. Materials shall conform to applicable specifications and shall be as specified herein. Materials not covered by applicable specifications or not specifically described herein shall be the best quality, as lightweight as practicable, and suitable for the intended purpose.

3.4.1 Fungus-proof materials. Materials that are nutrients for fungi shall not be used where it is practicable to avoid them. When used and not hermetically sealed, materials shall be treated with a fungicidal agent acceptable to the procuring activity. If they will be used in a hermetically sealed enclosure, fungicidal treatment shall not be required.

3.4.2 Plywood. Plywood shall be either hardwood plywood or Douglas fir plywood conforming to NN-P-530. The hardwood plywood shall be technical type (see 6.3.1) with high-density veneer; the display face shall be grade 1, and the reverse side shall be grade 2. The Douglas fir plywood shall be resin bonded, grade AD, interior.

3.4.3 Lumber. When lumber is used as a construction material, it shall be white ash, beech, birch, rock elm, hickory, hard maple, or oak. The grade of the lumber shall not be lower than No. 1 common. The lumber shall be seasoned to a moisture content not less than 12 percent nor more than 18 percent of its seasoned weight. The boards shall be free of all defects that materially weaken them; interfere with fabrication; or mar the appearance of the wood, making it unsuitable for the intended purpose. No knot, knot cluster, nor series of knots across the width of the board, within a length equal to the width of the boards, shall have a diameter greater than one-fourth of the width of the board. Boards shall be free of cross-grained divergence (see 6.3.2) greater than 1 inch in 10 along the grain.

3.4.4 Metals. Metals shall be either corrosion resistant or suitably treated to resist corrosion (see 3.8.4). Metals shall be as lightweight as practicable, consistent with strength and wear-resistant qualities. Unless otherwise specified, metals used for bearing surfaces shall be corrosion resistant. Hinges shall be made of corrosion-resistant metal or suitably treated and shall be a type and size compatible with the intended use.

3.4.4.1 Dissimilar metals. The selection and protection of dissimilar metal combinations shall be in accordance with requirement 16 of MIL-STD-454. Dissimilar metals are defined in MIL-STD-889.

3.4.5 Plastics. Plastic material used shall not be a nutrient to fungi. Plastic materials shall be resistant to cracking and deformation and shall be flame-resistant and arc-resistant. Molding plastic shall conform to MIL-M-14. Casting plastic shall conform to L-P-516. Laminated plastic shall conform to Bulletin NEMA-LPI-1951.

3.5 Design. An animated-panel training aid shall consist of a set of presentations displaying the systems of a specified aircraft, naval vessel, or missile. Each presentation shall consist of a flat display surface on which shall be mounted static and animated depictions of the system components. These presentations shall be integrated to present a comprehensive system by depictions of necessary connecting linkages;

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currentversion before use.

fluid, gas, and electrical lines; and any other connecting or associated elements. Systems and components shall be depicted by means of static and animated overlays, linkages, cables, schematic diagrams, three-dimensional models, and any other means found necessary to lend training effectiveness to the display. Illumination shall be used when specified in the individual training aid specification for fluid, gas, and electrical schematic systems and for any other purposes found applicable.

3.5.1 Display. The display (all the depictions and markings on the faces of the panels of the training aid) shall be based on the configuration of the specified model and serial number aircraft, naval vessel, or missile as of the date of invitation for bids. Optionally, a later configuration may be used when approved by the procuring activity. Systems to be depicted by the display shall be as specified in the individual training aid specification. The intended training usage (maintenance, aircrew, or general) shall be reflected in the design and details of the display as specified in the individual training aid specification. The aircraft, naval vessel, or missile systems, as specified in the individual training aid specification, shall be represented so that their operation; their location in the aircraft, naval vessel or missile; any any other details necessary for complete understanding of the systems are depicted. Depictions of systems shall be pictorial, schematic, or a combination of pictorial and schematic, as appropriate for the intended use, or as required by the individual training aid specification. Depictions of the components of a system shall not necessarily be restricted to the manner used for the depiction of the overall system. Depictions of components shall be pictorial or schematic cutaways or external views, either static or animated. The choice of depiction used for components shall be as specified in the individual training aid specification and as necessary for the stated training situation. The depictions shall be marked as specified in 3.5.1.16.

3.5.1.1 Human engineering considerations. Sound psychoeducational and human engineering principles as specified in MIL-STD-1472 shall be applied in the design of the display.

3.5.1.2 Technical data. Unless otherwise indicated in the individual training aid specification, the technical data used as a design basis for the display shall be subject to the approval of the procuring activity.

3.5.1.3 Orientation. Pictorial displays (and schematic displays where feasible) shall indicate the orientation and location of the aircraft, naval vessel, or missile system represented by superimposing the system on a pictorial representation, outline, or silhouette of the related aircraft, naval vessel, or missile, which shall be appropriately identified. Insofar as possible, the system shall be displayed so that the aircraft, naval vessel, or missile is represented with the nose or bow pointed to the left or upwards. Schematic displays that do not indicate the location of the system in the aircraft, naval vessel, or missile shall depict normal electrical current, gas, or fluid flow from left to right and top to bottom, wherever practicable.

3.5.1.4 Duplication of animations. An animated component that is duplicated within a single presentation may be shown in succeeding depictions as a static component,

Source: https://assist.dla.mil -- Downloaded: 20260-17T11:32Z
Check the source to verify that this is the current version before use.

provided that the position of the animated portion in its cycle of operation has no direct bearing on the system operation. An objective of the nonanimated view shall be to contribute additional information about the component. Unless otherwise specified, when two or more major assemblies, such as the right and the left landing gear assemblies are identically operated, only the left assembly shall be portrayed.

3.5.1.5 Arrangment of type II presentation. The panels of type II presentations depicting a system shall be numbered consecutively from left to right on the top row, and similarly in following sequence on the bottom row. The No. 1 panel shall depict the power supply or most important subsystems. Each additional panel shall show a separate subsystem. Flow lines shall connect the components on the several panels to form a complete system when combined for display as a single presentation. Insofar as practicable, lines shall not be shown on a panel unless connected to a component on its face.

3.5.1.6 Pictorial cutaways. A pictorial cutaway (complete or partial removal of a cover or enclosure) of the component shall be used if knowledge of the internal configuration of the component contributes to an understanding of its operation. The section may be taken obliquely or perpendicularly and shall depict the internal details of the component. Important details shall be emphasized; nonessential elements that do not contribute to the training value shall be omitted.

3.5.1.7 Schematic cutaways. If emphasizing the operational principles of a component is desirable, the component shall be depicted by a schematic cutaway (sectioning in a single or several selected planes). The schematic cutaway shall portray diagrammatically the internal arrangement and operational sequence of the component. The degree of detail included shall be in accordance with either method A or B as described herein and as specified in the individual training aid specification.

3.5.1.7.1 Method A. Method A depiction (see figure 1) shall be used for training aids intended primarily for use in teaching advanced maintenance personnel. The true external configuration of the operational part shall be indicated to the extent feasible. Complete details shall be shown to enable an instructor to demonstrate the following:

(a) Troubleshooting principles and analysis

(b) Location and shape of critical parts from a maintenance standpoint

(c) Points of adjustment and lubrication

(d) Manner of assembly and disassembly

(e) New features of components and systems.

3.5.1.7.2 Method B. Method B depiction (see figure 2) shall be used for training aids intended primarily for use in teaching basic maintenance personnel and aircraft or naval vessel crew members. Delineation of mating parts that shows only the method

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the currentversion before use.

of assembly or fabrication may be omitted. Details such as screw threads, seals, bearings, and bolts which tend to detract from the clarity of a depiction and which do not importantly contribute to the objectives of the depiction shall be omitted. Method B depiction shall provide means for demonstrating the following:

(a) Component nomenclature

(b) Theory and principles of operation of components and systems

(c) Component and system orientation in the aircraft, naval vessel, or missile

(d) Principles involved in basic maintenance

(e) Effect of malfunctioning components on system operation during flight and alternate procedures available.

3.5.1.8 External depiction. An external depiction shall be used for a component if a cutaway will not contribute to an understanding of the part, if the important operational features are entirely external, if component recognition is to be emphasized, or if it is a duplicate of a component that is shown elsewhere as a cutaway. The external depiction shall generally be an accurate pictorial representation but may be semi-schematic when necessary to emphasize certain operational features.

3.5.1.9 Animated and static depictions. An animated depiction moves or has moving parts; any other depiction shall be considered static. Unless otherwise specified in the individual training aid specification, an animated depiction shall be used for any component in the original aircraft, naval vessel, or missile system that moves or has moving parts. Finger grips or any other suitable means shall be provided on each animated depiction as necessary to permit easy manipulation by demonstrating personnel. Animated depictions shall be designed for easy removal from the panel. Adequate means shall be provided for handling and displaying the detached depictions and for their re-attachment to the panel.

3.5.1.10 Transparencies. Except for the Army, supplementary training transparencies, if required, shall conform to MIL-T-4782. For purchases for the Army only, transparency requirements shall be in accordance with Army Data Item 14-028 (see 6.2).

3.5.1.11 Mockups and models. When specified in the individual training aid specification, three-dimensional mockups or models of systems or components shall be provided to demonstrate the operation of complicated systems or mechanisms.

3.5.1.12 Illumination. When required by the individual training aid specification, the fluid, gas, or electrical lines and components shall have backlighting in suitable colors (see 3.5.1.14). When approved by the procuring activity, spotlighting of components may be used in lieu of backlighting. Illumination shall be static, flow line, or a combination of static and flow line. Static illumination shall be used to show the pressure (potential) and may be used to indicate flow in fluid, gas, or electrical lines. Each display using static illumination shall have a logical flow-pressure-relationship

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the current version before use.

scheme that shall be adhered to for all simulated operations. When flow-line illumination is specified for fluid, gas, or electrical flow indication, the pressure (potential) and the component activation shall be indicated by static illumination. The flow-line effect shall be accomplished by sequentially varying the light intensity along a line in a manner to give the illusion of flow or by any other means specified or approved by the procuring activity. The illuminated portion of the display shall be substantially flush with the remainder of the panel.

3.5.1.12.1 Distribution and intensity. Light distribution shall be substantially even along illuminated lines, with no hot spots apparent. Light intensity shall be adjustable, in accordance with the subparagraph entitled "Brightness Control" of MIL-STD-1472, to provide adequate visibility but shall not result in glare. The apparent velocity of the flow in flow-line displays shall produce a suitable visual effect. The rate of the simulated flow shall be adjustable to insure a smooth flow effect.

3.5.1.12.2 Operation. Illumination of lines and components shown on the display shall respond to actuation of simulated aircraft, naval vessel, or missile controls in a manner to simulate the corresponding aircraft, naval vessel, or missile system operation. Where animated schematic controls are included in a system display, illumination shall respond to both the simulated and the schematic controls. In addition, illumination to indicate sequential flow or operation shall respond appropriately to actuation of control components in the system display. Illuminated panels shall provide the operational system simulation specified in 3.7.2.

3.5.1.13 Visibility. The display shall be scaled and colored to permit adequate visibility of all system and component details at a distance of 20 feet. The movement and details of animations shall be clearly discernible at this distance. Color usage shall be exploited fully to reduce the complexity of presentations and simplify tracings of fluid, gas, and electrical lines. Brightness contrast shall be given greater relative importance than hue for the purpose of visibility.

3.5.1.14 Color code. Fluid, gas, and electrical lines shall be coded to indicate function, condition, etc. Fluid and gas lines shall be color coded to conform, in general, to table I. Electrical lines shall be color coded to conform, in general, to table II. Each panel assembly for which a color code is used shall have a color legend as specified in 3.5.1.15. Nonilluminated lines shall have a semigloss finish. The color of illuminated lines shall match the specified color as closely as possible. Colors for usages not listed or for alternate codes shall be subject to the approval of the procuring activity.

3.5.1.14.1 Pressure variation. Pressure variation within fluid systems shall be demonstrated by corresponding shade variation from the basic color of the fluid line. The basic color shall represent the average pressure and shall become lighter as the pressure decreases and darker as the pressure increases.

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currentversion before use.

TABLE I. Color Coding of Fluid and Gas Lines

Application	Color of FED-STD-595
Ambient air	Blue 25193
Pressurized air	Blue 25053
Air-fuel mixture	Blue 25109 and Red 21136 1/
Exhaust gases	Red 30252
Water	Green 24533
Fuel	Red 21136
Hydraulic pressure	Red 11105
Hydraulic return	Green 14187
Hydraulic supply	Yellow 23538
Hydraulic actuating lines	Orange 22246
Vent and drain	Blue 24491
Pressure oil	Red 22203
Scavenge oil	Yellow 32276
Supply oil	Yellow 13655
Carbon dioxide	Brown 30279
Methyl bromide	Brown 30117

1/ Blue speckled with red.

TABLE II. Color Coding of Electrical Lines

Circuit 1/	Color of FED-STD-595
DC (direct current)	
Battery voltage	Orange 12197
Generator voltage	Red 21136
Generator field	Green 24108
AC (alternating current)	
Phase A (or single phase)	Blue 25053
Phase B	Yellow 32276
Phase C	Brown 30099
AC and DC	
Ground	Black 27038

1/ Appropriate colors, clearly distinguishable from the basic circuit colors, shall be chosen for regulatory and control circuits. Tracers (dashes in alternating colors) shall be used for circuits that are subject to change in service through the action of switches or relays. The color of indicating and warning circuits shall correspond to the color of the power source monitored. External power circuits shall be indicated by dash lines that are the same color as the main power source.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

3.5.1.14.2 Temperature variation. Temperature variation within fluid or gas systems shall be demonstrated by a gradual change from the basic color of the fluid or gas line; for example, cool air to hot air shall result in a color change from light blue to light yellow or light orange to light red. The basic color shall represent the fluid or gas at the lowest temperature in the system.

3.5.1.14.3 Chemical reaction. Chemical reaction within fluid or gas systems shall be demonstrated by a distinct change in the color of the fluid or gas line consistent with the requirements of table I.

3.5.1.15 Color legend plaque. A plaque containing a color legend shall be mounted near the top of each panel assembly for which a color code is used. The plaque shall be appropriately sized for the intended purpose. The color chips on the plaque shall be 5/8 inch by 1-1/2 inches and shall be spaced 3/8 inch apart vertically. The lettering on the plaque shall be in accordance with 3.5.1.16.1 and the subparagraphs listed under the heading "Design of Label Characters" in MIL-STD-1472.

3.5.1.16 Marking of display depictions. Display depictions of systems, subsystems, major assemblies, and components shall be identified. The scale of each depiction, except a schematic depiction, that differs in size from the operational part shall be indicated. Each panel of the type II presentation shall have the subsystem title marked near the upper edge.

3.5.1.16.1 Lettering. The lettering shall be single-stroke, uppercase, commercial (Gothic) style. The lettering shall be applied by silk screen, using permanent art-type letters, or by high-quality hand lettering. Black lettering shall be used on gray display surfaces, and white lettering shall be used on black display surfaces. The ratio of the width of the stroke to the height of the letters shall be 1:8. Spacing shall be adequate to ensure the required legibility. Smaller lettering may be used only when it forms a part of a display that includes aircraft, naval vessel, or missile placards that are not necessarily intended to be legible to the trainees or that are intended for use by the instructor. The height of the letters shall be as follows:

(a) Systems - 1 inch

(b) Major assemblies and subsystems - 3/4 inch

(c) Components - 5/8 inch

(d) Scale - 1/2 inch

(e) Color legend - 1/2 inch.

3.5.1.16.2 Abbreviations and symbols. Abbreviations, when used, shall conform to ANA Bulletin No. 261. The use of abbreviations shall be kept to the minimum. Electrical symbols shall conform to USAS Y32.2. Mechanical symbols, when used, shall conform to part 2 of MIL-STD-17. Symbols not covered by USAS Y32.2 and MIL-STD-17 shall not be used without prior approval of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

3.5.1.16.3 Flow in nonilluminated lines. When flow-line illumination is not used to indicate flow, symbolic representations such as appropriately sized arrows shall indicate the direction of flow. Wherever possible, the arrows shall be placed outside of nonilluminated lines in which flow is being indicated. Wherever practicable, arrows shall be placed inside static illuminated lines in which flow is being indicated.

3.5.2 Panels and frames

3.5.2.1 Type I presentations. Type I presentations shall consist of two or three panels, each 6 feet by 3 feet, hinged along their long edges. Two-panel presentations shall be arranged for display with the hinge line either vertical or horizontal. Three-panel presentations shall be displayed with the hinge line vertical. The displayed presentation (see figure 3) shall stand on three legs, one attached at each side of the panel assembly and one centered at the rear. The top of the display surface shall be tilted at the same angle as specified herein for the type II presentation. The opened assembly shall be rigidly braced across the hinge line at the back. The height of the lower edge of the displayed presentation shall be adjustable to positions at 12, 16, and 20 inches above the floor. Bumpers at the panel edges and any other means necessary shall be provided to prevent damage to the display during erection and folding.

3.5.2.2 Type IA presentations. The type IA presentation shall be a variation of the type I and shall consist of two panels hinged vertically. Unless otherwise approved by the procuring activity, its general arrangement shall be as shown in figures 4 and 5. It shall consist of two panels, each 5 feet by 4 feet, hinged along the 5-foot edge and arranged for display with the hinge line vertical. The two-panel presentation shall be mounted on legs with swivel-type casters with locks, which will support it either in an opened or closed position. Provisions shall be made so that the legs can be retracted and stowed within the folded panels during storage and shipment. The legs shall be adjustable so that the height of the bottom of the panel from the floor may be varied between 12 to 24 inches in increments not exceeding 2 inches.

3.5.2.3 Type II presentations. The type II presentation shall consist of one or more panels which can be readily mounted on a frame either separately or in conjunction with others to form a connected display. Each panel shall be 3 feet by 3 feet. A system presentation will generally contain four to six panels. The frame shall consist of suitable upright, cross, and bracing members, similar to figure 6. (Note: Figure 6 references figures 7 and 8.) The frame shall disassemble into a compact package for storage and shipment. It shall be adjustable in height. The top of the display surface shall be tilted to the rear so that the surface forms an angle of approximately 9 degrees with the vertical (see figure 6). Faces of panels, when mounted, shall be flush; correct register shall be ensured between adjoining panels. The top and one adjacent edge of each panel of the type II presentation shall be identified with the panel title and number to permit ready identification when the panels are in their container. To facilitate mounting, display frames of the type II presentations shall be suitably marked with the appropriate panel numbers and guidelines that match the corresponding guidelines on the panels.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the currentversion before use.

3.5.3 Containers. When the type I presentation is folded, its top, bottom, and ends shall completely enclose it to form its shipping container as shown on figure 9. Stowage cabinets that conform in general to figure 10 shall be provided for panel storage and shipment of type II presentations. The maximum number of panels per cabinet shall be six. In addition to the containers formed by folding the type I and type IA presentations and the stowage cabinets for the type II presentations, containers to be provided shall include any other cabinets necessary for separate stowage of display panels or panel components. All containers shall be designed for convenient usage and handling. The design of containers with projecting hardware shall be avoided. The containers shall be designed to preclude the entrance of water (caused by precipitation, spilling, or similar circumstances) into the interior of folded type I and type IA presentations and the stowage cabinet of type II presentation. The containers shall be marked as specified in 3.9 and 3.10.

3.5.3.1 Carrying handles. Carrying handles shall be provided for all containers. Each type I presentation, each type IA presentation, and each stowage cabinet containing a type II presentation shall have at least four carrying handles. Where adequate for the purpose, two handles may be provided on the smaller containers. The carrying handles shall pivot into a carrying position perpendicular to the side and shall be 22 inches above the supporting surface wherever possible.

3.5.3.2 Schematic diagrams. Schematic diagrams of the display electrical system shall be of an appropriate size and shall be mounted on the inside of each container housing an illuminated presentation.

3.5.4 Instructor's control panel. When specified in the individual training aid specification, an instructor's control panel equipped with a hinged cover and latch shall be located on the left end of the training aid cabinet, as viewed from the front. The control panel shall contain switches for introducing simulated malfunctions into the system depicted, as specified in the individual training aid specification. Controls and displays on the instructor's control panel shall conform to the requirements listed under the heading "Controls and Displays" of MIL-STD-1472.

3.5.5 Electrical requirements. All illuminating circuits or component actuations that require electrical power shall be designed to operate from a nominal 115-volt, 60-hertz power source with a maximum load of 30 amperes per presentation. Electrical design shall conform to Pamphlet 70, National Electrical Code (Electric Wiring and Apparatus).

3.5.5.1 Master switch. Except for the purchases for Army, a master switch on the display surface shall disconnect all power from the presentation. For purchases for the Army, the master switch shall be operable only by means of a key.

3.5.5.2 Overload protection. The circuit shall be protected on the equipment side of the master switch by either a circuit breaker conforming to W-C-375 or a fuse conforming to W-F-791, with a spare fuse located in the fuse box. The circuit breaker or the fuse shall be located in an enclosure and shall be readily accessible.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the current version before use.

3.5.5.3 Lamps. Lamps, when required, shall have a bayonet base, a design or rated voltage of 28 volts, and a rated life of at least 1,000 hours. The lamps shall conform to W-L-111. The power supply selected shall not reduce the rated life of the lamps. Storage space for spare lamps equivalent to 25 percent of the total number of lamps required for the trainer shall be provided in a readily accessible location on the back of the trainer panel. The storage space shall be properly labeled.

3.5.5.4 Transformers. Transformers shall conform to grade 2, class R, family 01 of MIL-T-27 quality.

3.5.5.5 Heat dissipation. Adequate means shall be provided to dissipate any excessive heat generated. Internal cabinet temperatures shall not exceed 113 degrees Fahrenheit with an ambient air temperature of 100 degrees Fahrenheit.

3.5.5.6 Power cable. Each electrically operated presentation shall have a 25-foot, three-wire (one of which is a grounding wire) rubber-covered extension cable conforming to MIL-C-5756. The connectors shall be three-wire grounding type conforming to ASA Standard C73.1-1957. A male connector shall be provided on the line end, and a locking-type female connector on the trainer end. A flush-mounted matching male receptacle shall be provided on the presentation.

3.5.5.7 Wiring. Wire shall conform to MIL-W-5086. All wiring shall have adequate capacity to carry at least 50 percent overload for the circuit in which it is used. Connecting wires shall not be smaller than AWG (American Wire Gauge) No. 22. Unless adequate precaution is taken to insure satisfactory operation in service, wire smaller than AWG No. 40 shall not be used within any component. All wiring shall be identified as specified in MIL-W-5088.

3.5.5.7.1 Installation. Soft solder alone shall not be depended upon for mechanical strength. Where wires and terminals are joined for soldering, the wires shall be hooked or otherwise secured to the terminals prior to soldering. Terminal connectors shall be clamped between metal members such as an assembly of two nuts, two washers, and a machine screw. Where wires are run through partitions or shields less than 1/4 inch in thickness, grommets shall be used to provide mechanical protection. Panels more than 1/4 inch in thickness shall either have grommets or else have the through-hole edges rounded to a radius equal to one-half the thickness of the material. Wires shall not be run so that the insulation will be abraded on sharp edges. Conductors shall be bound in cables, wherever possible, and securely held by flexible sheathing wraplock, flat type cable lacing cord, or other means approved by the procuring activity. Cables shall be supported at least every 24 inches.

3.5.5.7.2 Grounding. On electrically operated presentations, all non-current-carrying conducting materials such as metallic conduit, cable sheath or armor, enclosures, and switch boxes shall be electrically bonded and connected to a common ground bus which shall be connected to the grounding terminal of the power receptacle (see requirement 1 of MIL-STD-454).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

3.5.5.8 Personnel safety. The training aids shall be designed to provide maximum safety to personnel during installation, operation, and maintenance of the training aid. Provisions shall be made to prevent personnel from coming in contact with rotating or reciprocating parts or with potentials in excess of 30 volts (see requirement 1 of MIL-STD-454).

3.6 Construction. The training aids shall be constructed to withstand reasonably hard usage during shipment, handling, and operation.

3.6.1 Display elements. All display elements, including surface display portions, shall be constructed to withstand regular training use without premature failure.

3.6.1.1 Surface display elements. Surface display elements shall be applied directly on the panel face by silk-screening, stenciling, air brushing, or other suitable means approved by the procuring activity. When stencils are used, the stencil marks shall be removed. Photographs shall be high-quality prints, bonded to the panel surface in a manner to avoid curling, wrinkling, bleeding, or impairment of the print quality and to insure a permanent bond. Silk-screening shall conform to high-grade commercial practice.

3.6.1.1.1 Overlays. Overlays shall be constructed of 1/4-inch, 5-ply plywood; plastic; tempered masonite; or a suitable lightweight metal. Other materials may be used if approved by the procuring activity. Overlays shall be securely fastened to the panels with wood screws or through bolts. Exposed heads of fastening hardware shall be made flush and painted with a conforming color. Overlays made of material that is subject to warpage shall have sufficient fastening points to prevent separation. Surface design on overlays shall be in accordance with 3.6.1.1. Animated overlays shall be constructed to meet the performance requirements specified in 3.7.2. Finger grips shall be riveted and shall be free to rotate on rotating parts. Overhanging ends and projections subject to damage shall be avoided.

3.6.1.1.2 Linkage and cables. All portions of linkage and cable systems shall be constructed to meet the performance requirements specified in 3.7.2. Means for performing necessary adjustments, such as maintaining proper cable tension, shall be provided. Cables may be simulated by nonmetallic materials, provided the requirements specified in 3.6.1 are met.

3.6.1.1.3 Pivots. Except where bearings will be subject to appreciable radial stress, pivot points shall be riveted. Where bearings will be subject to appreciable radial stress, through bolts shall be used. Where bearings will be subject to continuous rotation under stress, antifriction bearings shall be used. Provisions for lubrication shall be made as necessary.

3.6.2 Panels, frames, and containers. The type I and the type IA presentations shall be constructed primarily of hardwood plywood, lumber, and metal in accordance with figures 3, 4, and 9 or as otherwise approved by the procuring activity. The frames of the type II presentations shall be constructed of lumber or lightweight metal and in

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

general shall conform to figures 6 and 10. The panels of the type II training aids shall be constructed of hardwood plywood with metal fittings and shall conform to figure 7. The stowage cabinets for the type II presentations shall be constructed in accordance with figure 10 and 3.6.2.3. The supporting legs of the type I presentations shall have swivel-type casters to facilitate movement of the presentations. The casters shall have a locking feature to prevent motion of the presentations while in use.

3.6.2.1 Nonilluminated display panels. Nonilluminated display panels shall be constructed of 1/2-inch, five-ply hardwood plywood.

3.6.2.2 Illuminated display panels. Unless otherwise approved by the procuring activity, illuminated display surfaces shall be constructed of suitable transparent or translucent plastic material of adequate strength, rigidity, and thermal characteristics to withstand normal use (see 3.4.5). Illuminated panels shall be constructed so that their interiors are readily accessible for maintenance of operating equipment and for storage of spare bulbs and fuses.

3.6.2.3 Containers. Containers shall be constructed of 1/2-inch, 5-ply Douglas fir plywood, framed with hardwood and reinforced with metal angles where necessary. The bottom of all containers shall have hardwood skids not less than 3/4 inch by 3/4 inch (see figure 9).

3.6.3 Fastening and joining. Fastening and joining of equipment such as panels, rames, and containers shall be by means of wood screws and through bolts or by other approved type of fastening. Fastening shall be adequate to insure rigidity and to preclude separation of the joined elements. Threads of all machine-screws of 0.06-inch diameter and larger shall conform to MIL-S-7742. Self-tapping screws shall not be used in applications that might require removal or re-engagement. All threaded fastenings shall be secured by suitable locking means. Rough metal surfaces shall be spot-faced for screw heads. Metal insert bushings shall be used on through bolt fastenings in wood that are subject to rotation, to appreciable bearing loads, or to repeated assembly and disassembly. Bolt heads shall be countersunk when necessary to avoid interference.

3.6.3.1 Soldering. All soldering both electrical and nonelectrical, shall conform to requirement 5 of MIL-STD-454.

3.6.3.2 Welding. All welds shall be ample for the application, with thorough penetration and good fusion. Welds shall be substantially free from blisters, cavities, or any other surface defects. Welds shall be as strong as the materials they join. Materials adjacent to the weld shall not be adversely affected by the welding process. Welds shall be thoroughly cleaned, and fluxes shall be neutralized. Structural welding shall conform to requirement 13 of MIL-STD-454. Resistance welding for electronic modules shall conform to MIL-W-8939.

3.6.3.3 Gluing. Phenolic resin glue shall be used wherever wood-to-wood glue joints are used. Glued joints shall be cured under pressure. Joints shall be secured in addition to gluing. Glue use shall conform to requirement 23 of MIL-STD-454.

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currentversion before use.

3.7 Performance and operation. Performance and operation of the training aids shall be as specified herein and in the detail specification.

3.7.1 Erection, folding, and stowage. Erection, folding, and stowage of the type I presentation shall be possible with minimum difficulty and in minimum time. Not more than two men shall be necessary to erect, fold, or stow any training aid.

3.7.1.1 Mobility (type IA presentations). Type IA presentations mounted on their legs shall roll easily and conveniently into either the opened or closed position or easily roll from one location to another in either the opened or the closed position.

3.7.1.2 Mobility (type II presentations). Panels of type II presentations shall slide easily into and out of their containers. Mounting of, and removal of panels from, the display frames shall be readily and easily accomplished without the necessity of removing other panels.

3.7.2 Simulation. The operation of the over-all presentation, including performance simulation means such as animation and illumination, shall correctly demonstrate the operation of the depicted system. Individual animated parts shall be movable and shall depict realistically the movement of their operational counterparts in any position necessary for correct demonstration of the operating sequence. If necessary for such demonstration, parts shall return automatically to their appropriate normal positions.

3.7.3 Moving parts. All moving parts of animations shall move freely and easily without binding, jamming, or sticking but shall not be excessively loose. Linkage and cable systems shall be free of excessive slack or backlash. Provisions shall be made to prevent uncontrolled free-falling of animations, which might result in damage.

3.7.4 Environmental conditions. The range of environmental conditions such as temperature and humidity over which the equipment must give trouble free operation shall be as specified in the individual training aid specification.

3.8 Finishes and protective treatments. Finishes shall be applied to all surfaces when required either for appearance or for protection against corrosion or deterioration. Finished surfaces shall present a smooth, uniform, solid covering and shall not crack, chip, scale, nor peel under the environmental conditions specified in the detail specification. Application of finishes shall not, in any respect, impair the performance of the training aid. The procedures for cleaning, painting, plating, anodic films, and chemical treatment of the training aids shall be in accordance with MIL-STD-808.

3.8.1 Display surfaces. The finish color of the display surfaces of both illuminated and nonilluminated displays shall be lusterless gray conforming to 36440 of FED-STD-595. The display surfaces shall be finished in a manner to minimize glare and to withstand frequent washings with mild soap. Plywood display surfaces shall be given a protective finish consisting of at least two coats of lacquer sealer, two coats of lacquer type primer, and two cross-coats of camouflage lacquer conforming to TT-L-20 of the specified color. Plywood display surfaces shall be sanded between coats, as necessary. Plastic display surfaces shall be finished with a minimum of two coats of lacquer of a type specifically recommended for the plastic material used. Migration or bleeding of the plasticizer into the lacquer shall not occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

3.8.2 Depictions. The surface of all depictions shall be protected with a lacquer that will provide resistance to the effects of humidity, water, and any other environmental condition as specified in the detail specification and protection against wear and abrasion. Except where clear, colored, or uncolored plastic is appropriate, undecorated portions of depiction surfaces shall be finished as specified for display surfaces of like material.

3.8.3 Wood surfaces (excluding display and depiction surfaces). Except for the surfaces of displays or depictions, wood surfaces shall be given two coats of lacquer sealer, two coats of lacquer type primer, and two cross-coats of camouflage lacquer. Two coats of primer may be substituted for the two coats of lacquer sealer. The finish color shall be as specified in 3.8.1.

3.8.4 Metal surfaces. Except for the surfaces of corrosion-resistant metals, all metal surfaces shall be electroplated or protectively treated to prevent corrosion, as specified in MIL-STD-808. Surfaces painted for this purpose shall have a corrosion-inhibiting priming undercoat applied. Paint shall also be applied to corrosion-resistant surfaces, where necessary to improve appearance. Bearing surfaces that are metal shall be a corrosion-resistant metal or shall be chrome plated.

3.9 Instructions. Erection and setup instructions for the presentations shall be prominently displayed on the outside of each container or stowage cabinet housing a training aid. If means other than marking of the container or cabinet surface are used for this purpose, they shall be securely affixed and adequately protected. Height or any other adjustment positions or instructions shall be clearly marked on the appropriate panel members.

3.10 Identification of product. Nameplates conforming to MIL-STD-130 shall be provided by the contractor and shall be attached to the training aid. The nameplates for the type I and the type IA presentations shall be attached to the lower right-hand corner on the face of the extreme right panel as viewed from the front. The nameplates for the type II presentations shall be attached to the lower left-hand corner on the rear of each 3- by 3-foot panel as viewed from the rear. All parts shall be marked for identification in accordance with MIL-STD-130. Each container shall be clearly marked on the exterior as specified in the individual training aid specification.

3.11 Workmanship. The training aids, including all parts and accessories, shall be constructed and finished in a high quality, workmanlike manner in accordance with requirement 9 of MIL-STD-454. Sharp edges shall be rounded off. Burrs shall be removed from all metal parts. All plywood edges shall be clean cut and free from all sawmarks and scoring. Workmanship for formulation and application of protective finished shall conform to the best commercial practices.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currentversion before use.

requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of training aids shall be classified as follows:

(a) Preproduction tests

(b) Quality conformance tests.

4.3 Preproduction tests. The preproduction tests shall consist of all of the inspections and tests described under 4.5.

4.3.1 Preproduction test sample. The preproduction test sample quantity shall be as specified in the detail specification.

4.3.2 Preproduction test report. When specified by the procuring activity (see 6.4), three copies of a preproduction test report prepared in accordance with MIL-STD-831 shall be furnished to the procuring activity. When specified (see 6.2), the report shall contain a log of component failures and maintenance downtime occurring during the preproduction tests and a complete analysis of the failures and maintenance problems and the corrective action taken.

4.4 Quality conformance tests. Each training aid shall be subjected to the quality conformance tests. The quality conformance tests shall consist of the following inspections and tests as described under 4.5:

(a) Visual inspection

(b) Functional tests

(c) Electrical operating tests.

4.5 Test and inspection methods

4.5.1 Visual inspection. All components of the training aid shall be visually inspected for conformance to requirements with respect to workmanship; assembly fit; quality of finish; general appearance; accuracy of aircraft, naval vessel, or missile system and component depiction; and all other pertinent requirements of this specification, the individual training aid specification, and the approved design.

4.5.2 Functional tests. The training aid shall be subjected to functional tests to demonstrate compliance with the performance requirements of this specification and the individual training aid specification.

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the currentversion before use.

4.5.3 Electrical operating tests. In addition to the tests required by 4.5.2, all electrical circuits, equipment, and components of the training aid shall be tested to insure satisfactory operation under load and compliance with the safety requirements of this specification. Systems shall be fully energized and operated continuously or intermittently for a period of 20 hours, in accordance with the normal operating procedure, without failure or malfunction of any part of the circuit or of any component.

4.5.4 Preservation, packaging, packing, and marking. Training aids that have been prepared for delivery shall be examined for conformance to the requirements specified in section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. The training aid shall be preserved and packaged in accordance with method III of MIL-P-116.

5.1.2 Level C. The training aid shall be preserved and packaged to a degree which will afford protection against corrosion, deterioration, and physical damage during shipment from the supply source to the first receiving activity. Level C, in general, shall conform to the applicable rules of carriers and regulations. The supplier's commercial practice may be used provided it meet the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Training aids preserved and packaged as specified in 5.1.1 shall be packed in exterior type shipping containers conforming to PPP-B-601. As far as practical, exterior containers shall be of uniform shape and size, be of minimum cube and tare consistent with the protection required, and contain identical quantities. Containers shall be provided with a case liner conforming to MIL-L-10547 and shall be sealed in accordance with the appendix thereto.

5.2.2 Level B. Training aids preserved and packaged as specified in 5.1.1 shall be packed as specified in 3.5.3.

5.2.3 Level C. Training aids preserved and packaged as specified in 5.1.2 shall be packed as specified in 3.5.3.

5.3 Marking. Interior and exterior containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The training aids covered by this specification are intended to be used in teaching nomenclature, principles, and theory of operation of various aircraft, naval vessel, or missile systems and components to maintenance personnel and crew members. Specific use will be specified in the individual training aid specification.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Type of training aid required (see 1.2 and 3.3)

(c) Preproduction requirements including destination of samples, activity responsible for testing, and instructions concerning submittal of reports (see 4.3.2 and 6.4).

(d) Specify transparency requirements for Army purchases (see 3.5.1.10)

(e) Selection of applicable levels of preservation and packaging and packing.

6.3 Definitions. The following definitions shall apply for the purposes of this specification.

6.3.1 Technical type plywood. Technical type plywood is designed to have equal strength in both the length and the width directions. The glue line is waterproof and unaffected by microorganisms. The bond withstands full weather and water exposure.

6.3.2 Cross-grained divergence. Cross-grained divergence is the grain deviation in inches from the longitudinal axis of a board, over a specified distance in inches measured along the longitudinal axis.

6.4 Data requirements. Data requirements for the Air Force will be in accordance with the procedures specified in AFSCM/AFLCM 310-1.

6.5 Annotation of changes. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - MI
Navy - TD
Air Force - 11

Reviewers:
Navy - AS, OS
Air Force - 70

Preparing activity:
Air Force - 11

Project No. 6910-0139

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

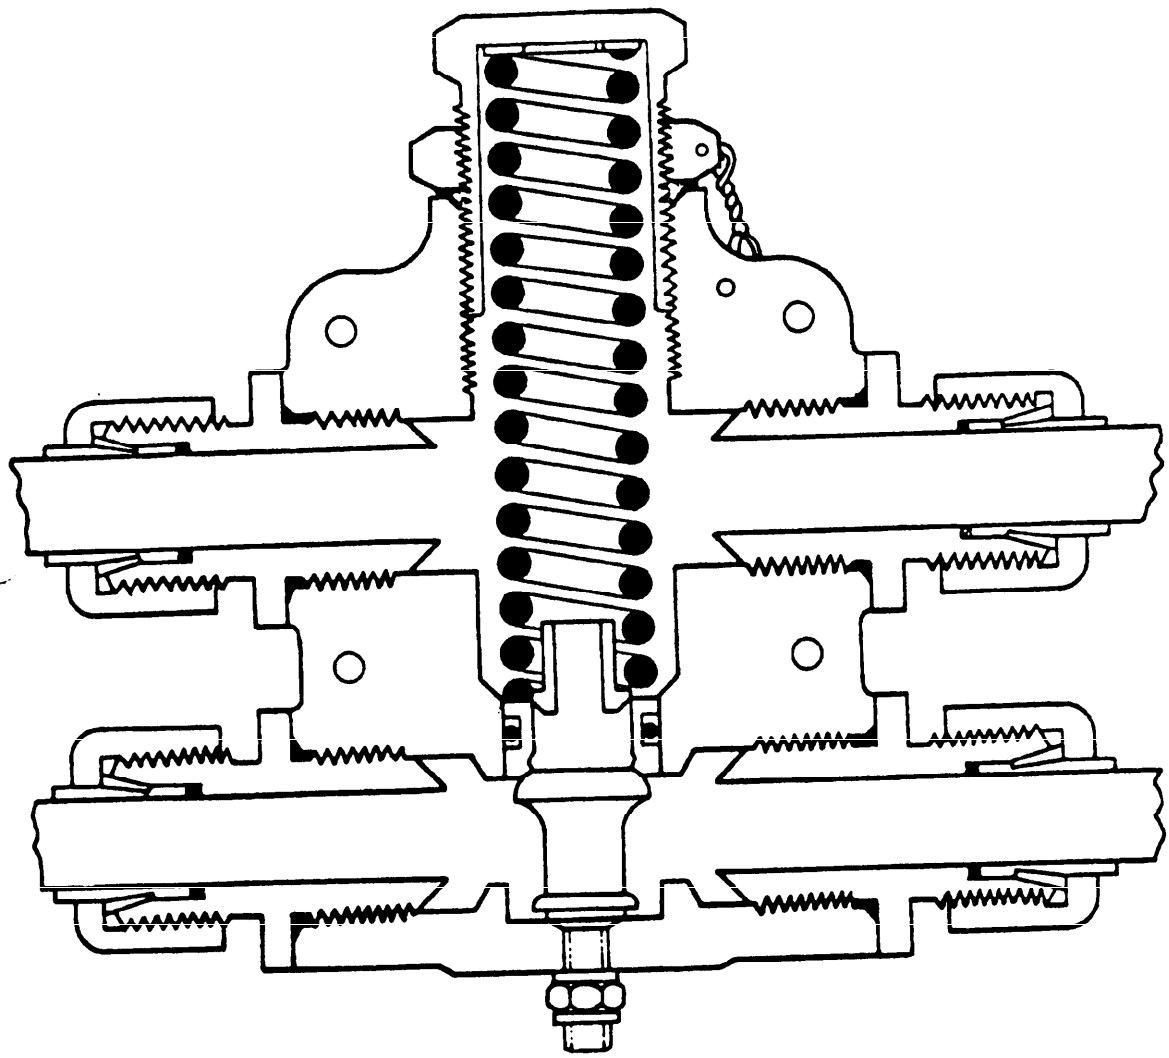


FIGURE 1. Method A Depiction of Relief Valve

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

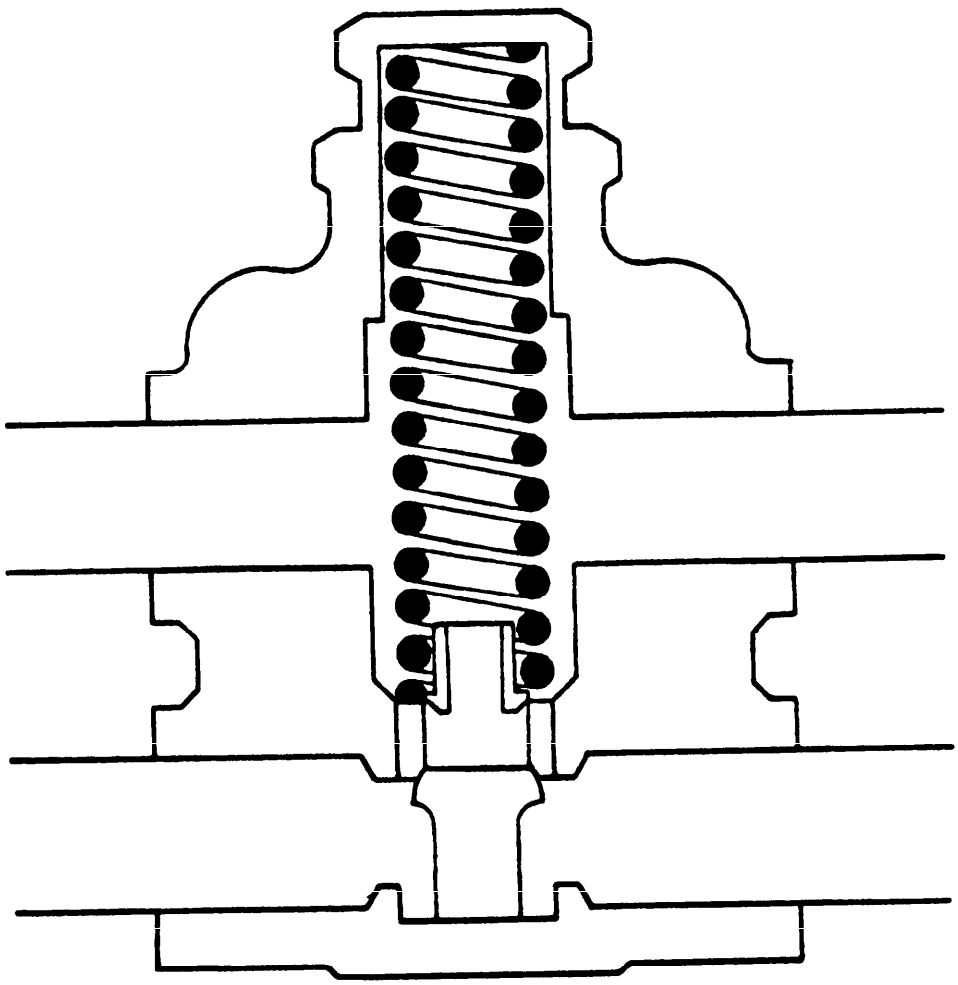


FIGURE 2. Method B Depiction of Relief Valve

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

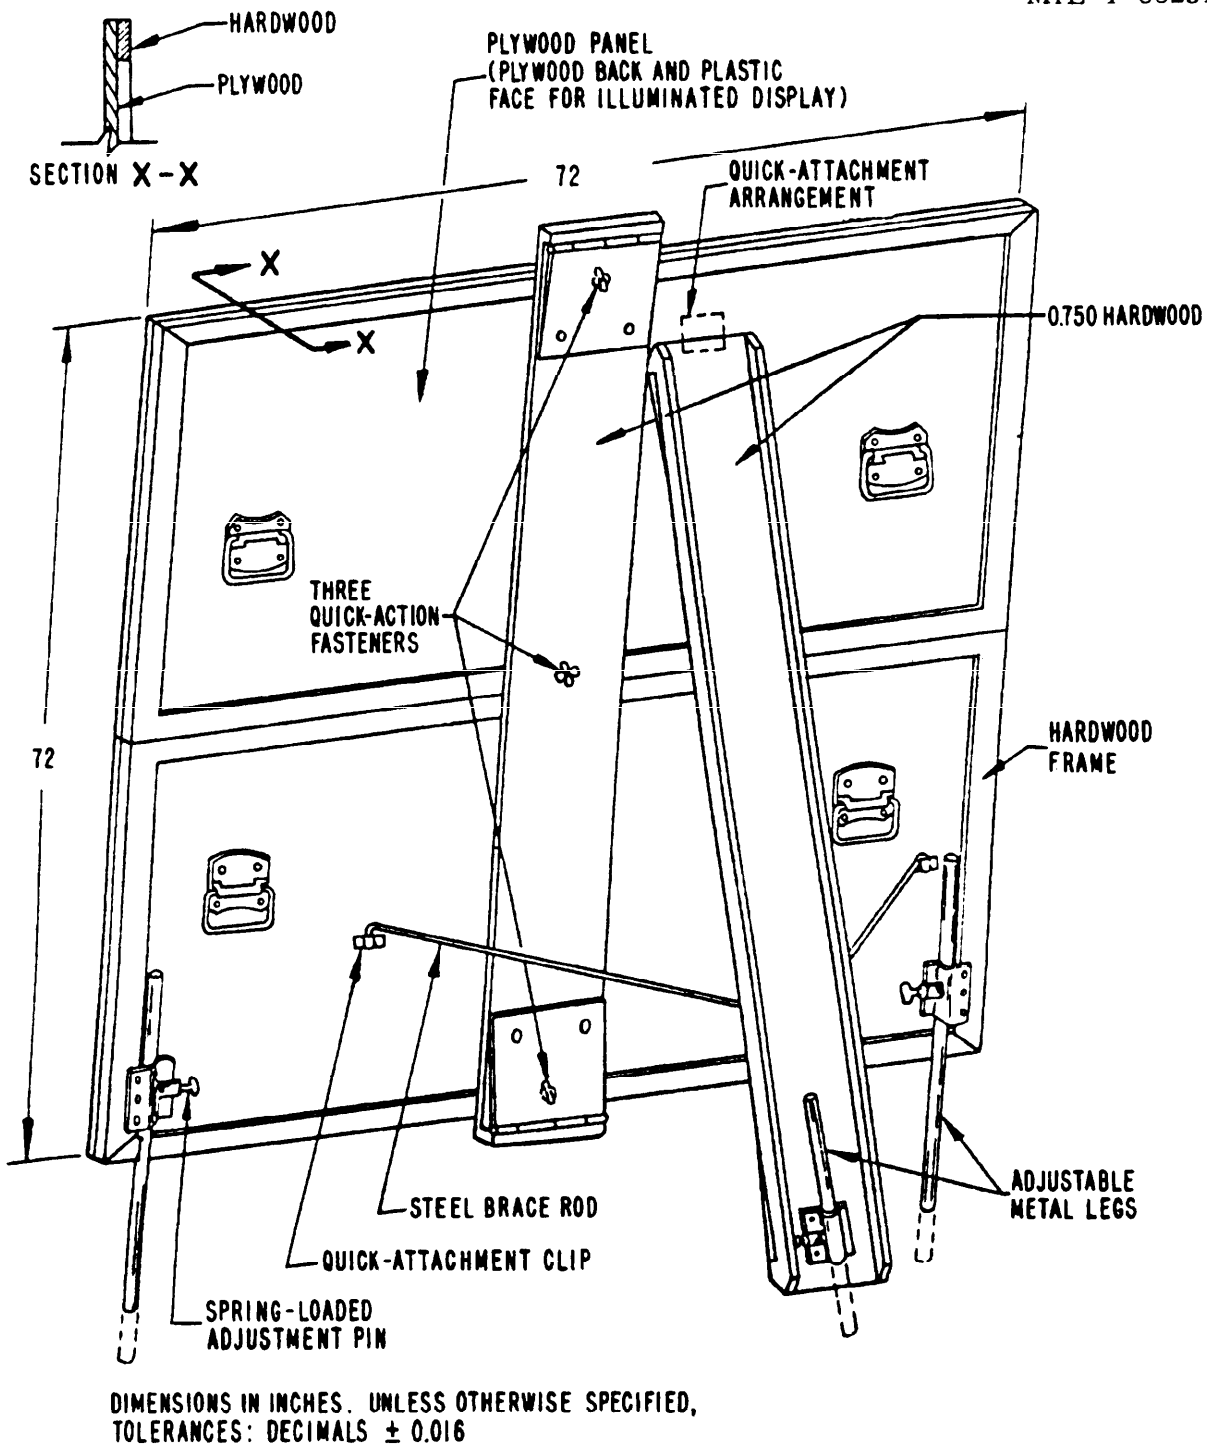


FIGURE 3. Two-Panel, Horizontal-Hinge Arrangement (Erected Type I Presentation)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

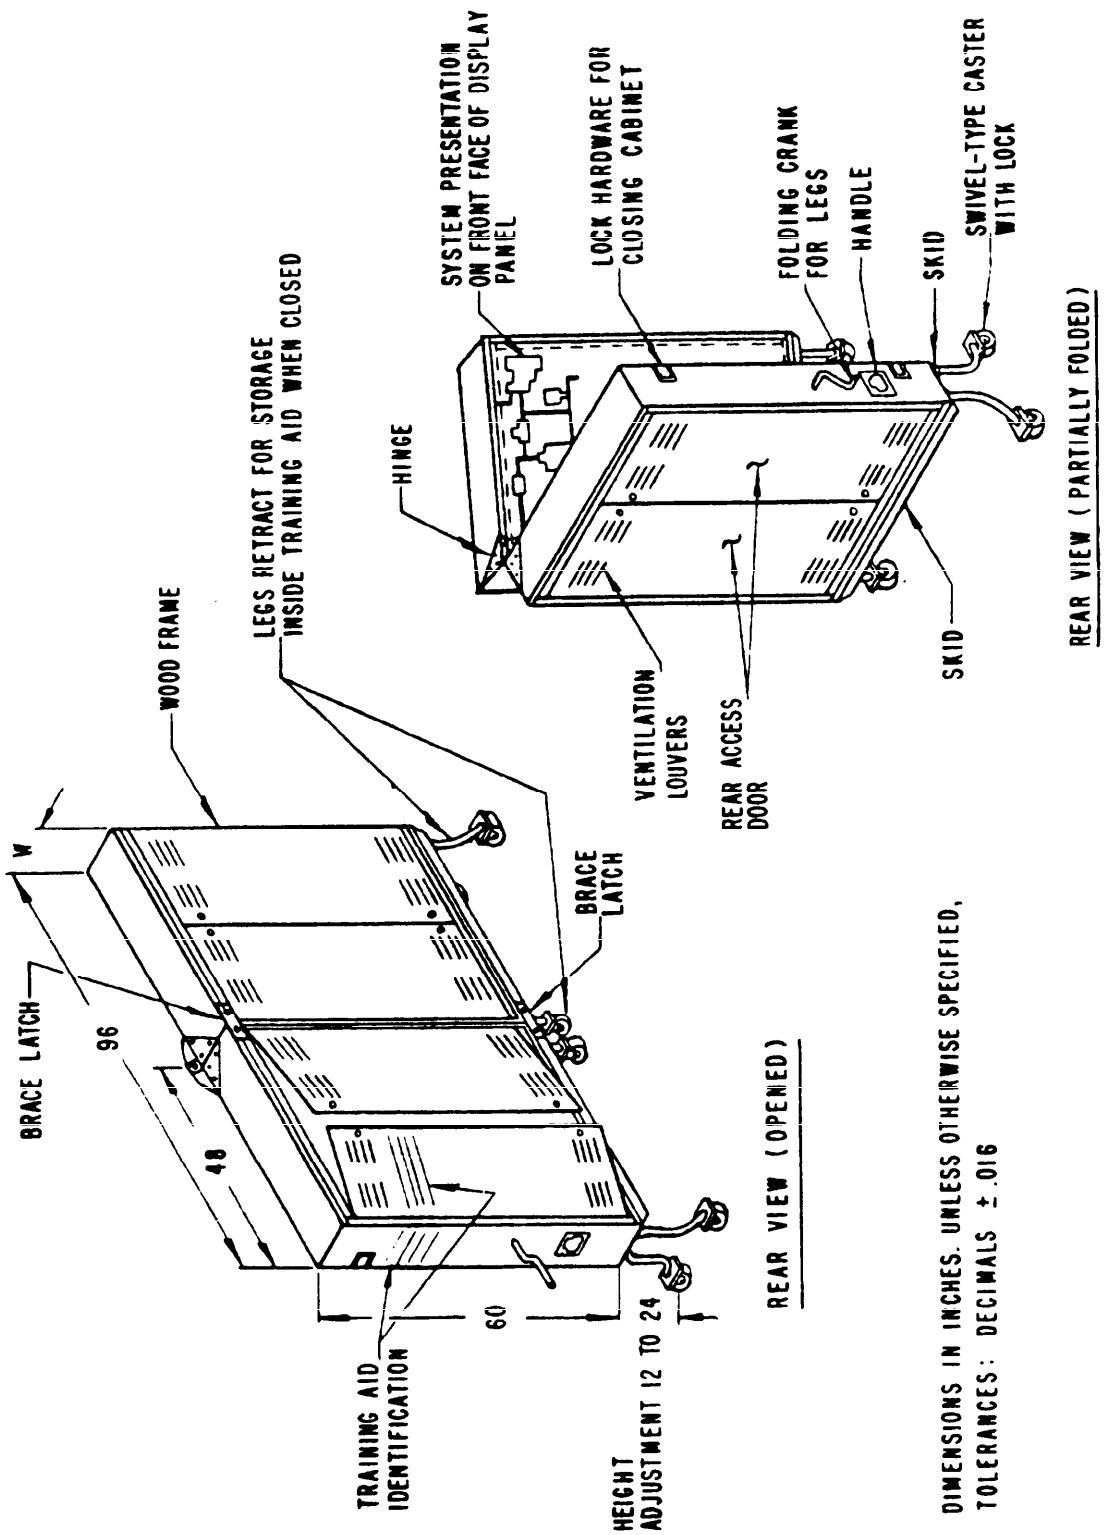


FIGURE 4. Container (Rear View) of Type IA Presentation

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:32Z
Check the source to verify that this is the current version before use.

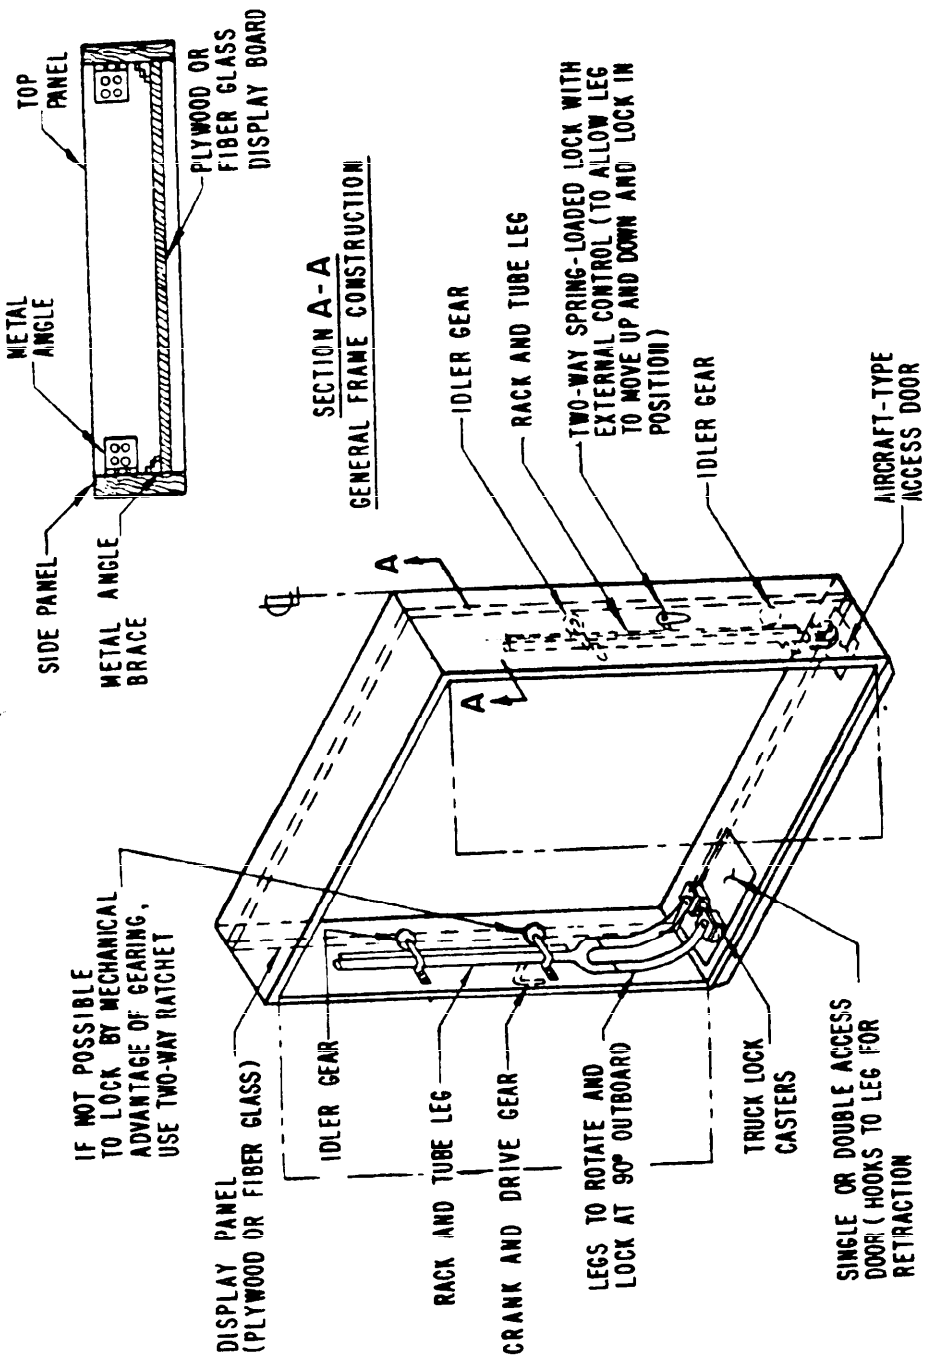


FIGURE 5. Container Frame (Rear View) of Type IA Presentation

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the current version before use.

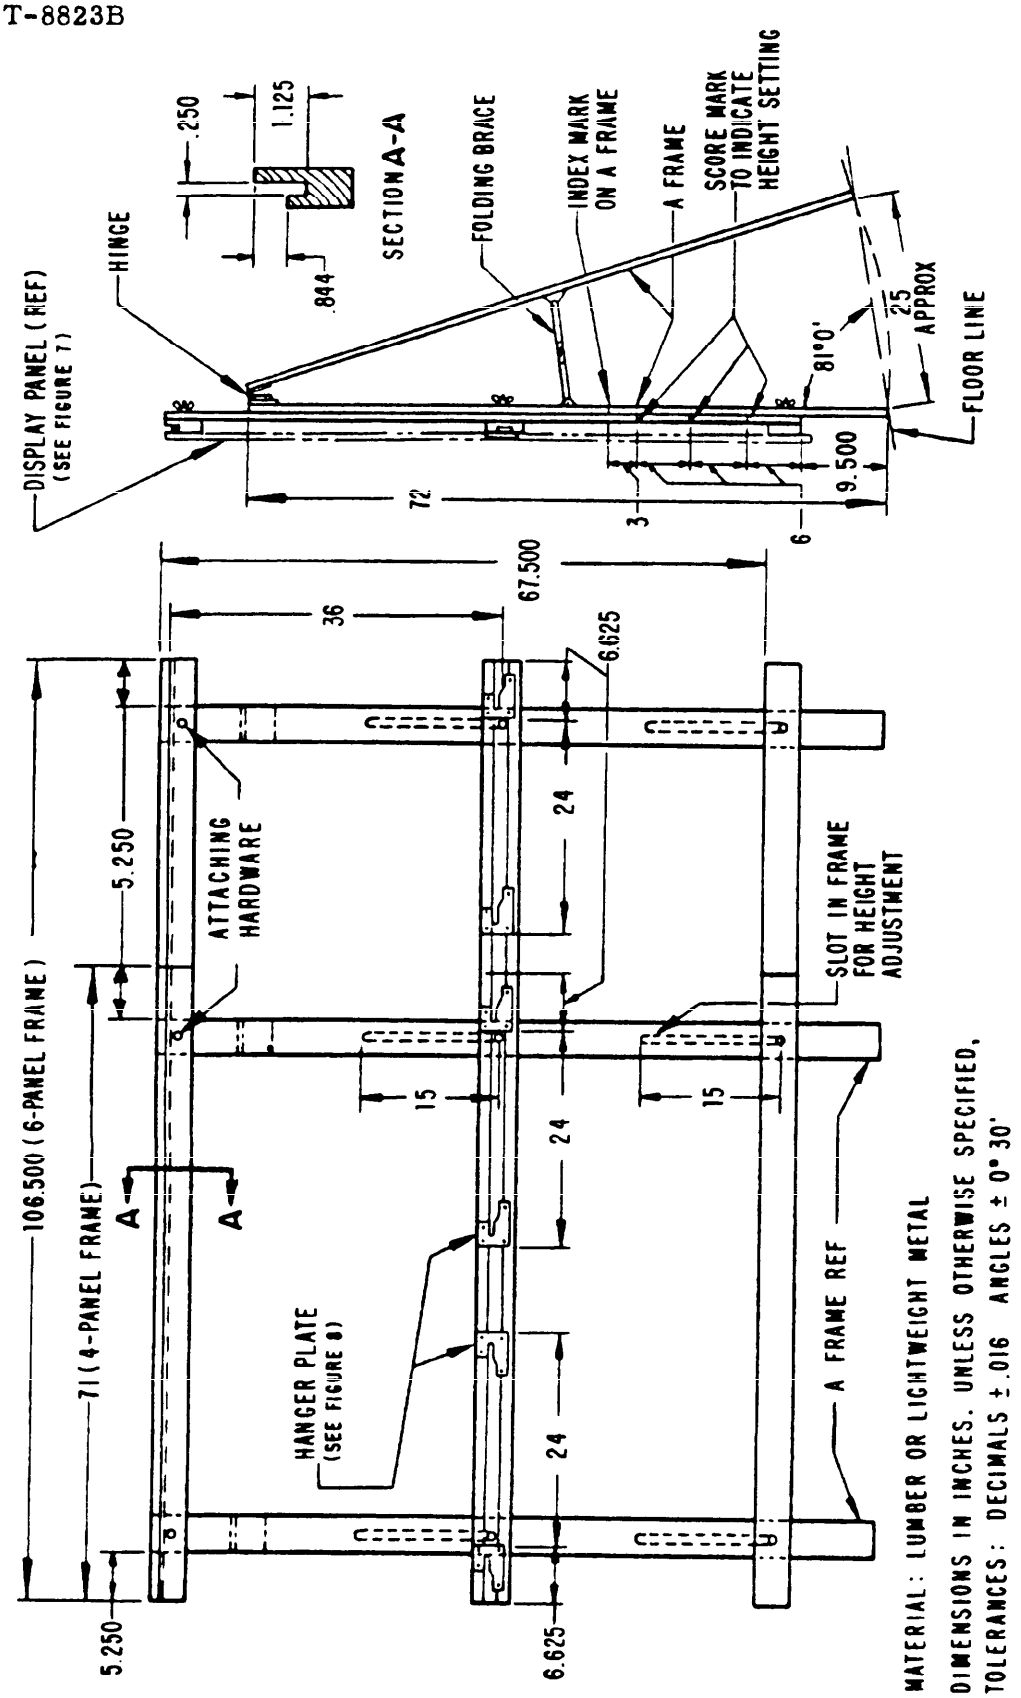


FIGURE 6. Frame of Type II Presentation

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.


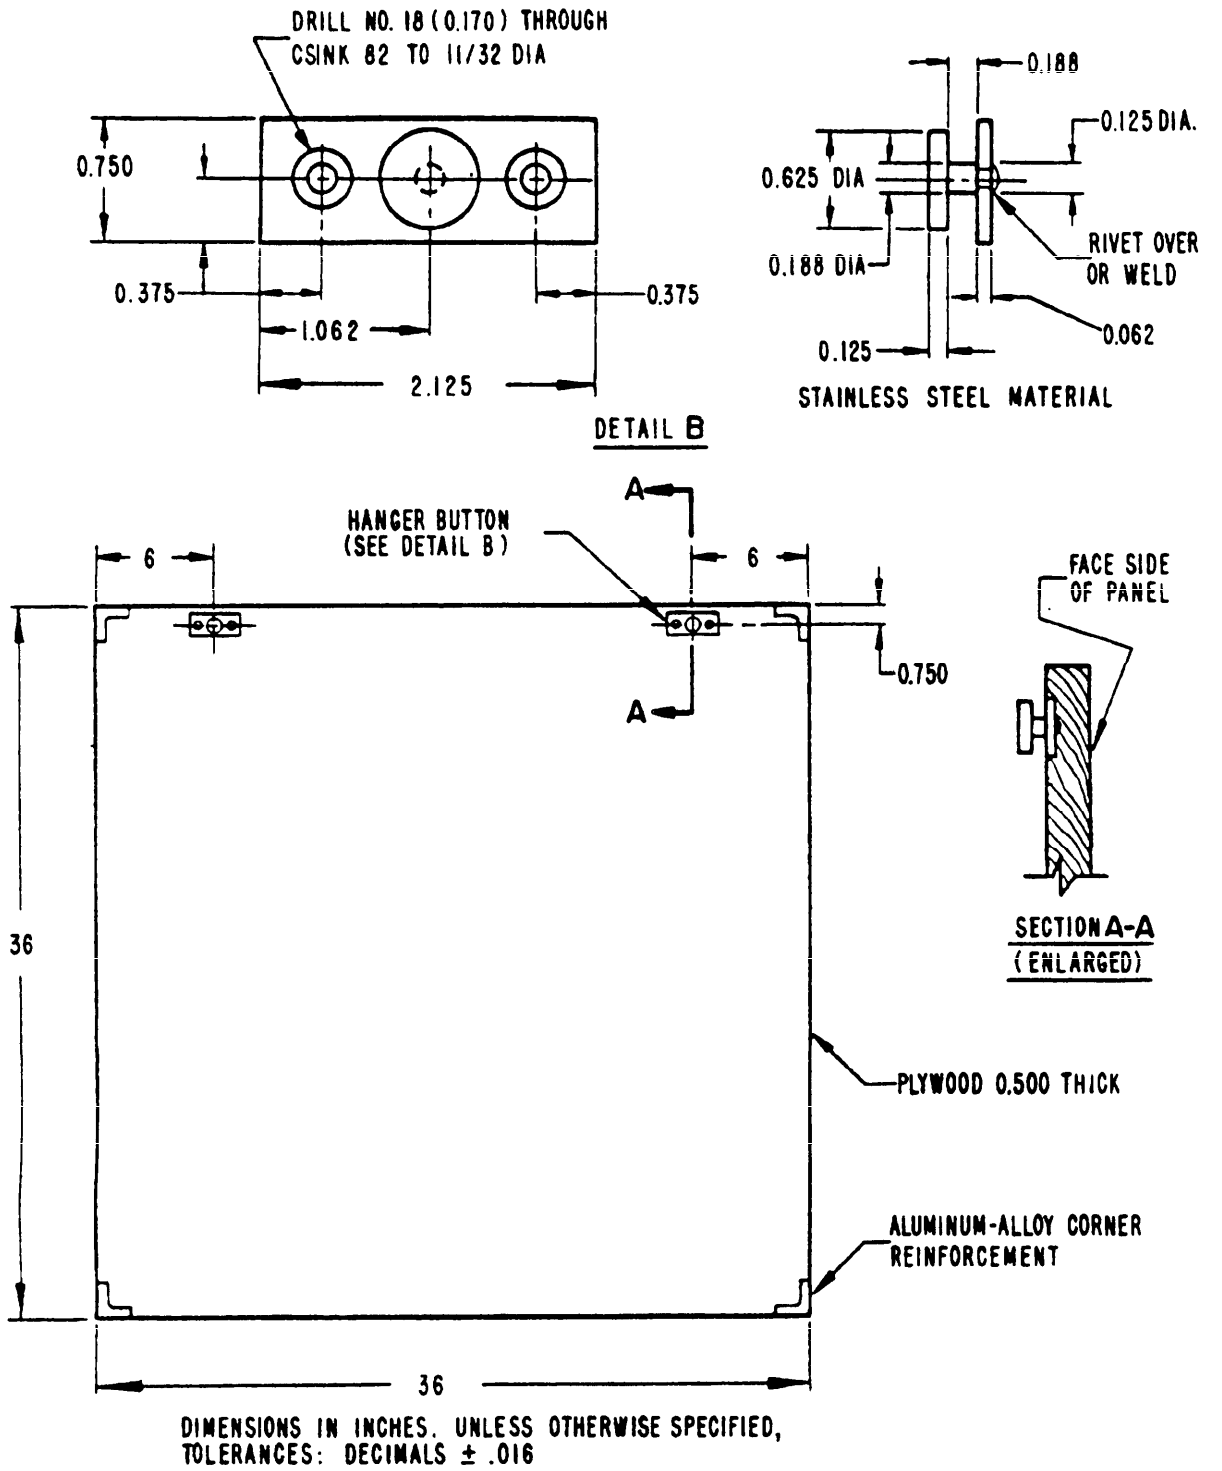


FIGURE 7. Panel Assembly of Type II Presentation


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

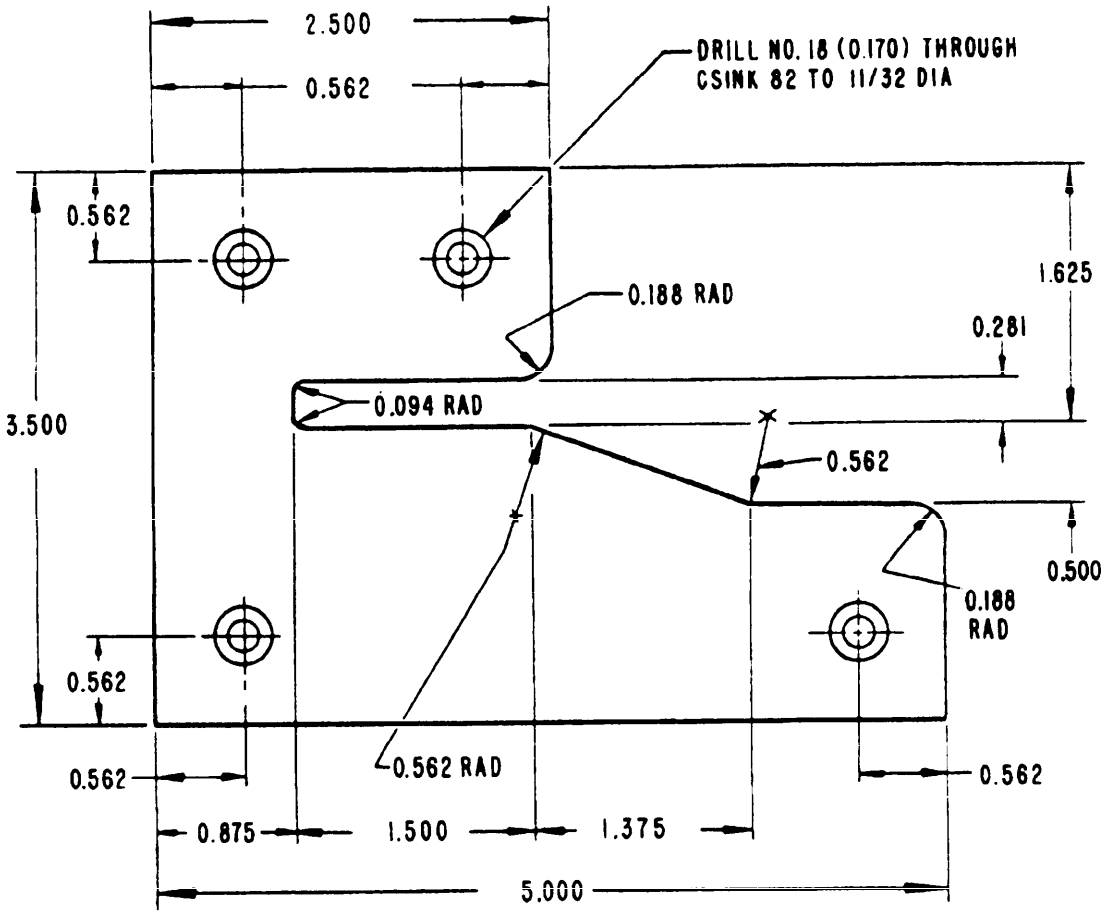


STAINLESS STEEL 3/32 - THICK MATERIAL
RIGHT HAND SHOWN, LEFT HAND OPPOSITE.
REQUIRED: 2 RIGHT AND 2 LEFT FOR 4-PANEL FRAME
4 RIGHT AND 2 LEFT FOR 6-PANEL FRAME
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ±0.016.

FIGURE 8. Frame Hanger Plate for Type II Presentation

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the current version before use.

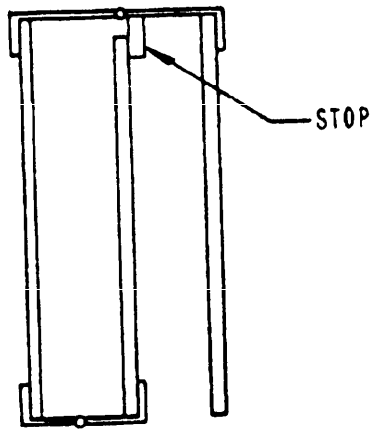

3-PANEL FOLDING ARRANGEMENT

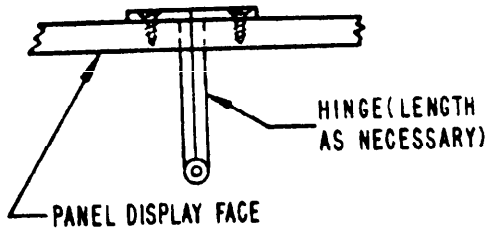

OPEN POSITION DETAIL


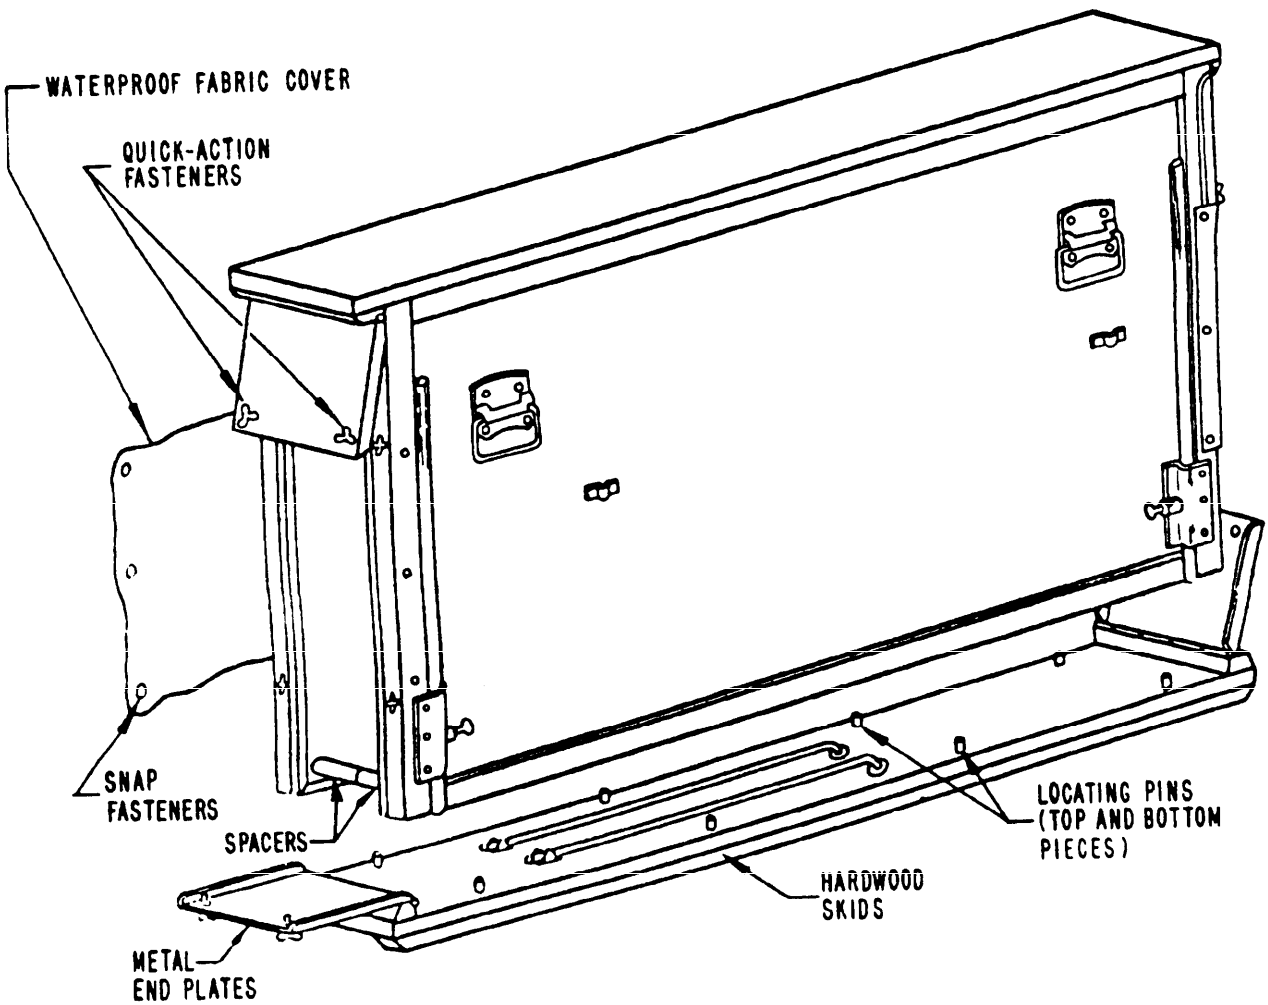


FIGURE 9. Folded Type I Presentation

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.

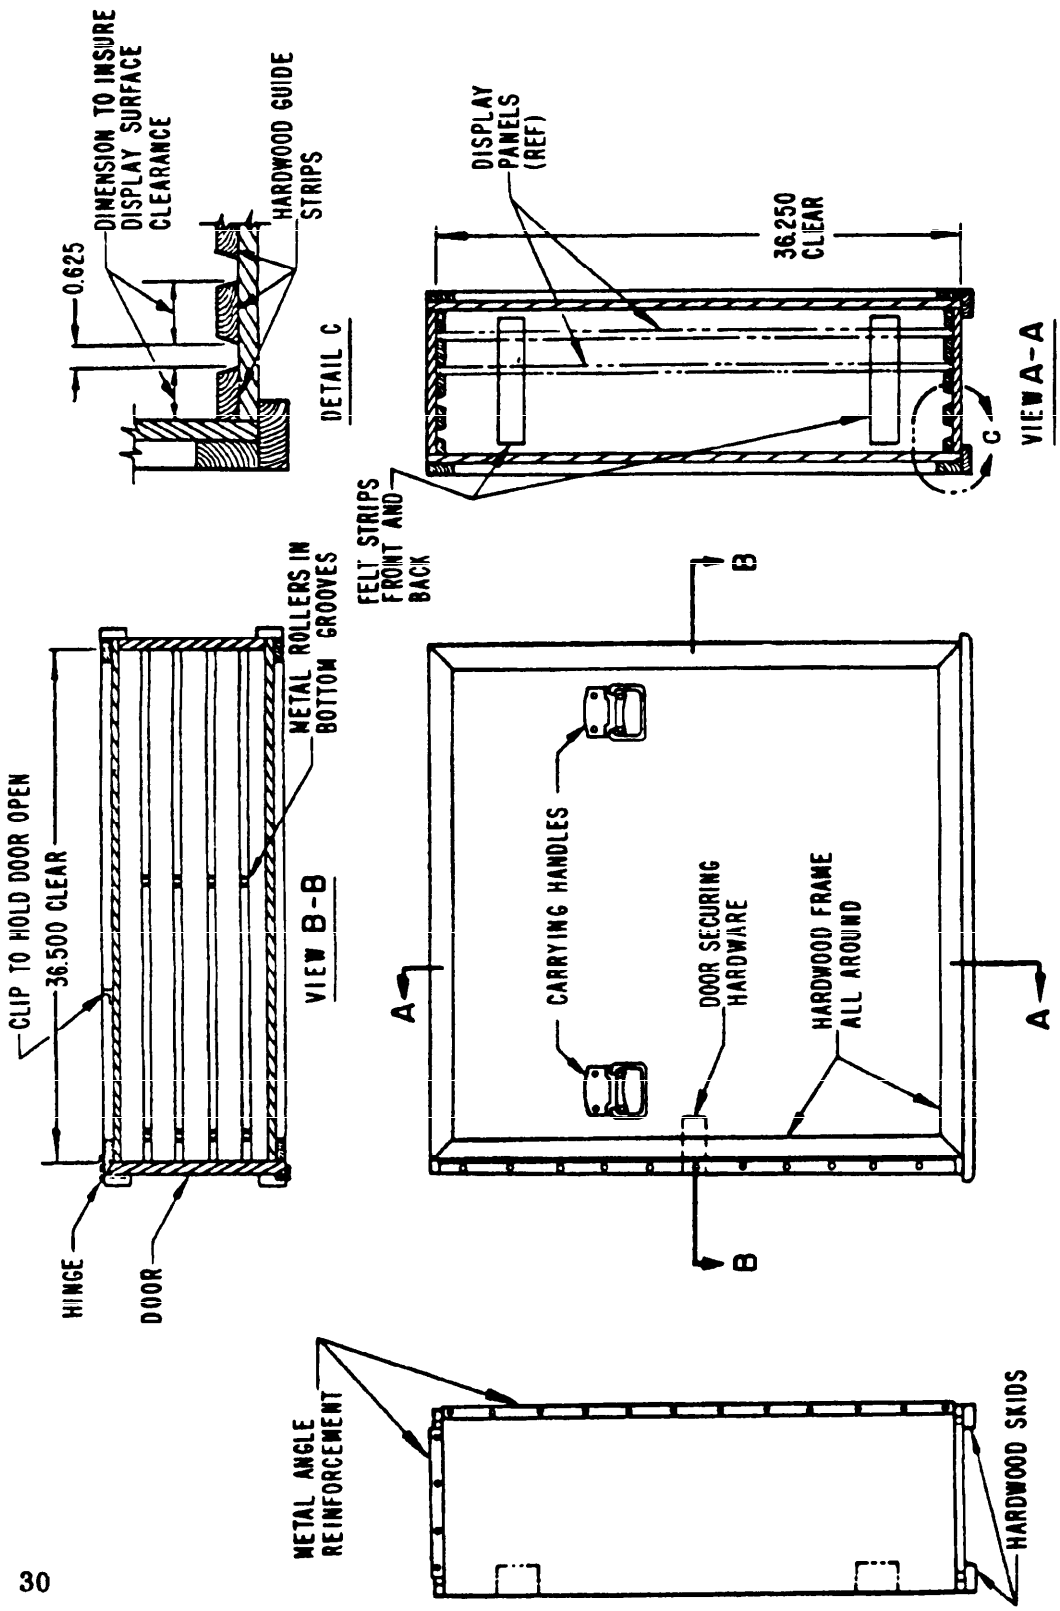

ALL MATERIAL 5-PLY PLYWOOD, EXCEPT AS OTHERWISE NOTED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED,
TOLERANCES: DECIMALS ± 0.016

FIGURE 10. Stowage Cabinet for Type II Presentation

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 54 WHICH MAY BE USED.

AFLC–WPAFB–OCT 67 2M

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:32Z
Check the source to verify that this is the current version before use.

ASD(ASNPS)
Wright-Patterson AFB, O 45433

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

POSTAGE AND FEES PAID

ASD(ASNPS)
Wright-Patterson AFB, O 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:32Z
Check the source to verify that this is the current version before use.