FED. SUP CLASS
5320

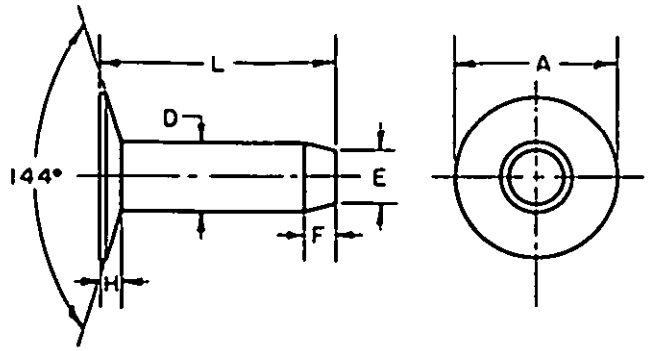


| SIZE NO. | | | 7 | 8 | 10 | 12 | 14 |
|---|---|---|---|---|---|---|---|
| BODY DIAMETER | D | NOM | .180 | .165 | .134 | .109 | .083 |
| | | MAX | .183 | .167 | .136 | .111 | .085 |
| | | MIN | .174 | .161 | .130 | .105 | .079 |
| HEAD DIAMETER | A | MAX | .513 | .481 | .417 | .353 | .260 |
| | | MIN | .487 | .455 | .395 | .333 | .240 |
| HEAD HEIGHT | H | MAX | .075 | .072 | .065 | .054 | .042 |
| | | MIN | .056 | .054 | .047 | .040 | .030 |
| TIP DIAMETER | E | | .151 | .135 | .109 | .093 | .065 |
| CHAMFER LENGTH | F | | .125 | .094 | .094 | .078 | .078 |
| LENGTH | L | | DASH NUMBER | DASH NUMBER | DASH NUMBER | DASH NUMBER | DASH NUMBER |
| 1/4 | 0.250 | | | | | | 24 |
| 3/8 | 0.375 | | | 6 | 12 | 18 | 25 |
| 1/2 | 0.500 | | 1 | 7 | 13 | 19 | 26 |
| 5/8 | 0.625 | (A) | 2 | 8 | 14 | 20 | 27 |
| 3/4 | 0.750 | | 3 | 9 | 15 | 21 | |
| 7/8 | 0.875 | | 4 | 10 | 16 | 22 | |
| 1 | 1.000 | | 5 | 11 | 17 | 23 | |

NOTES:

(A) 1. MATERIAL: Copper, in accordance with QQ-W-343, Type S.

2. PROTECTIVE COATING: Uncoated.

3. DIMENSIONS: All dimensions are in inches.

(A) 4. TOLERANCES: Length L +0.031 in., -0.00 in.

5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35745-1.

6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

7. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 23 APRIL 56 REVISED (A) 18 DEC 1968

| | | | |
|---|---|---|---|
| P.A. NC<br>Other Cust 10<br>82 | TITLE<br>RIVET SOLID-BELT | MILITARY STANDARD<br>MS35745 | |
| PROCUREMENT SPECIFICATION<br>FF-R-556 | SUPERSEDES<br>In part, EMA11 and EMA12 | SHEET 1 OF 1 | |

Source: https://assist.dla.mil -- Downloaded: 2026-04-25T17:27Z
Check the source to verify that this is the current version before use.