INCH-POUND

MS35813E
17 SEPTEMBER 2009
SUPERSEDING
MS35813D
27 FEBRUARY 1987

DETAIL SPECIFICATION SHEET

CONNECTOR, ROD END - STEEL

Inactive for new design after 16 June 1997.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-DTL-45918.

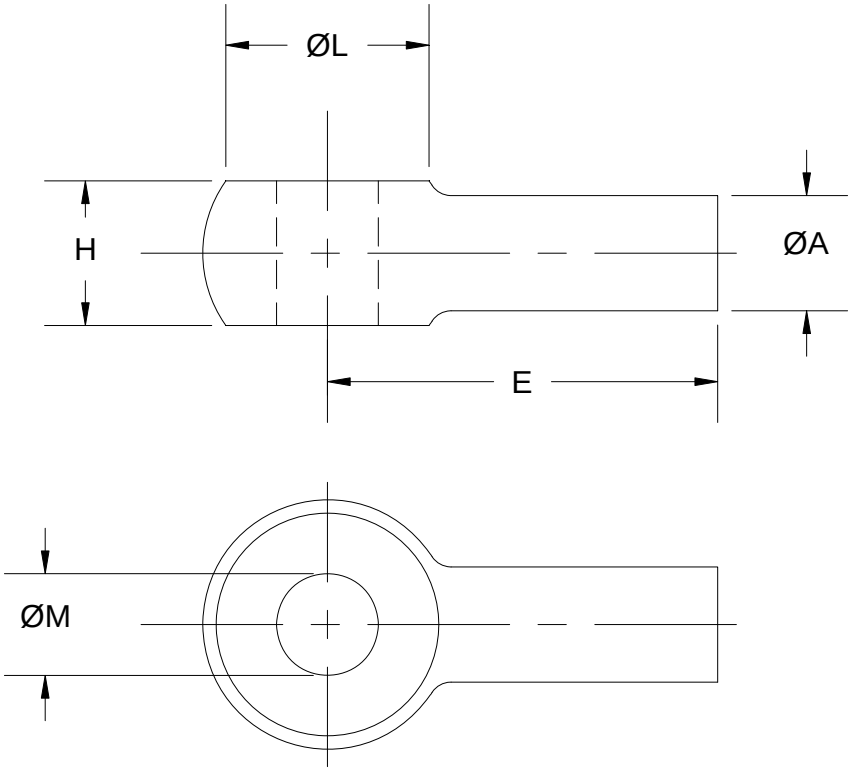

FIGURE 1. Connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

PART NUMBER	NOMINAL DIAMETER ∅A	LENGTH E	THICKNESS OF BOSS +.00 -.01 H	DIAMETER OF BOSS ±.03 ∅L	DIAMETER OF HOLE ∅M		WEIGTH (APPROX) LBS	ULTIMATE (MIN) AXIAL LOAD LBS
					SIZE	TOLERANCE +.0010		
MS35813-1	.190 (#10)	1.25	.19	.38	.1875	-.0010	.02	1500
MS35813-2	.250 (1/4)	1.25	.28	.50	.2500	-.0010	.03	2700
MS35813-3	.312 (5/16)	1.38	.34	.59	.3125	-.0010	.05	4200
MS35813-4	.375 (3/8)	1.50	.44	.69	.3750	-.0010	.08	6000
MS35813-5	.437 (7/16)	1.50	.50	.81	.4375	-.0010	.12	8200
MS35813-6	.500 (1/2)	1.75	.56	.94	.5000	-.0020	.18	10700
MS35813-7	.625 (5/8)	2.00	.69	1.19	.6250	-.0020	.34	16800
MS35813-8	.750 (3/4)	2.38	.81	1.44	.7500	-.0020	.59	24300
MS35813-9	.875 (7/8)	2.75	.94	1.29	.8750	-.0020	.91	33000
MS35813-10	1.000	3.00	1.06	1.94	1.0000	-.0020	1.32	43200

Requirements:

1. Material: Steel, carbon, SAE 1010, 1111, SAE C1015 – C1029 or equivalent in accordance with SAE-AIR4127. These steels shall have a minimum tensile strength of 55,000 psi.

2. Protective coating: Zinc coated (hot dip galvanized) in accordance with ASTM A123/A123M, Zinc (electrodeposited) in accordance with ASTM B633.

3. Surface roughness: Surfaces marked $\surd$ shall have $\surd^{125}$ surface roughness in accordance with ASME B46.1.

4. Tolerance: Unless otherwise specified, tolerance shall be ±.03.

5. Dimensions: All dimensions specified are to be met after plating.

Notes:

1. Unless otherwise specified, all dimensions are in inches.

2. Remove all burrs and sharp edges.

3. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

4. Illustrations are for identification and are not intended to restrict the design or shapes not dimensioned.

5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force – 99

Preparing Activity:
DLA -IS

(Project 5340-2009-027)

Review activities:
Army – CR4, GL, MI
Navy – MC, OS, SH, YD

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:28Z
Check the source to verify that this is the current version before use.