FED. SUP CLASS
5985

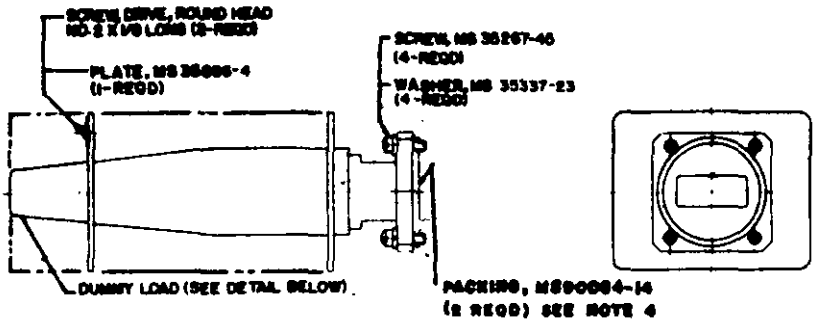

PART NUMBER	TYPE NUMBER	FREQUENCY RANGE (KMC)	RATED POWER AVERAGE (WATTS)	RATED POWER PEAK (KW)	VSWR (MAX)
MS35886-1	DA-148/U	7.05-10.00	600	460	1.10

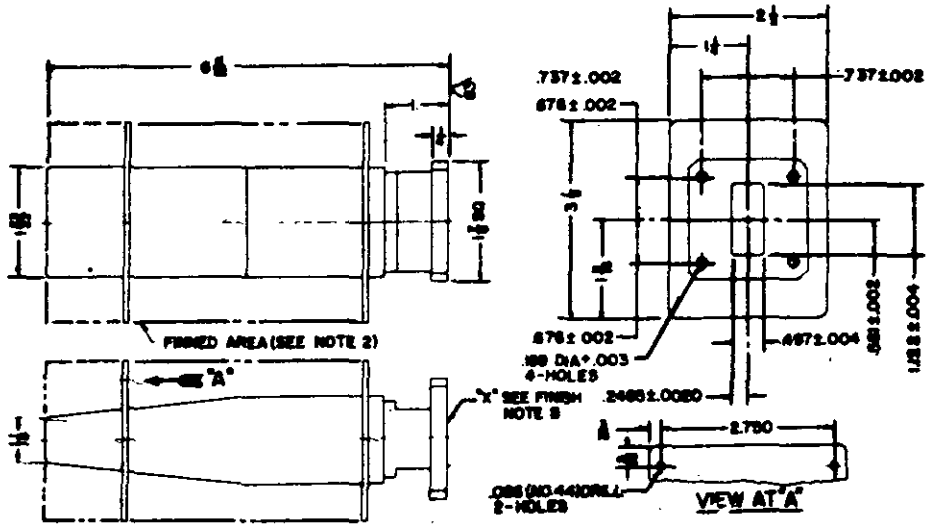

DETAIL (DUMMY LOAD)

NOTES:

1. FOR MATERIAL AND FINISH SEE PROCUREMENT SPECIFICATION.
2. ALL DIMENSIONS ARE IN INCHES. TOLERANCES, FRACTIONAL, ∠ 1/64; DECIMAL, ∠ .005, UNLESS OTHERWISE SPECIFIED.
3. QUANTITY OF FINS REQUIRED WILL BE DEPENDENT ON HEAT LEVEL REQUIREMENTS OF THE LOAD.
4. ONE REQUIRED AT ASSEMBLY, ONE REQUIRED AS REPLACEMENT.
5. DUMMY LOAD TO BE USED WITH CHOKE FLANGE MS90060-137B.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) CANCELLED - FOR PROCUREMENT USE MIL-D-3954/11A

APPROVED 21 JUN 1957 REVISED (A) 15 MAY 1962 (B) 15 MAR 1980

P.A. AR Other Cust EL	TITLE DUMMY LOAD, ELECTRICAL DA-148/U	MILITARY STANDARD MS35886
PROCUREMENT SPECIFICATION MIL-D-3954	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved by the Department of Defense and is mandatory in all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

* U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/1558

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.