FED. SUP CLASS
5985

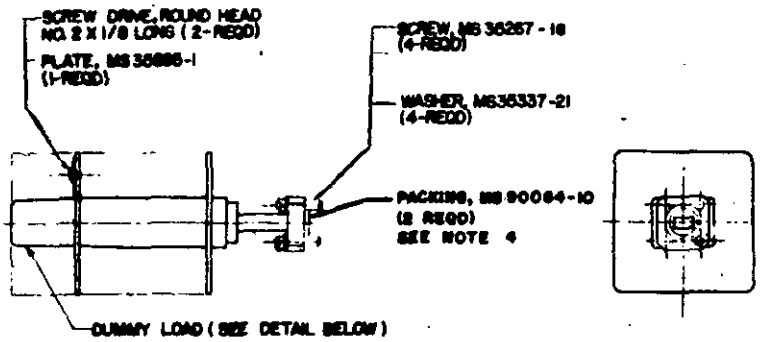

PART NUMBER	TYPE NUMBER	FREQUENCY RANGE (KMC)	RATED POWER		VSWR (MAX)
			AVERAGE (WATTS)	PEAK (KW)	
MS35887-1	DA-158/U	26.50-40.00	75	100	1.15

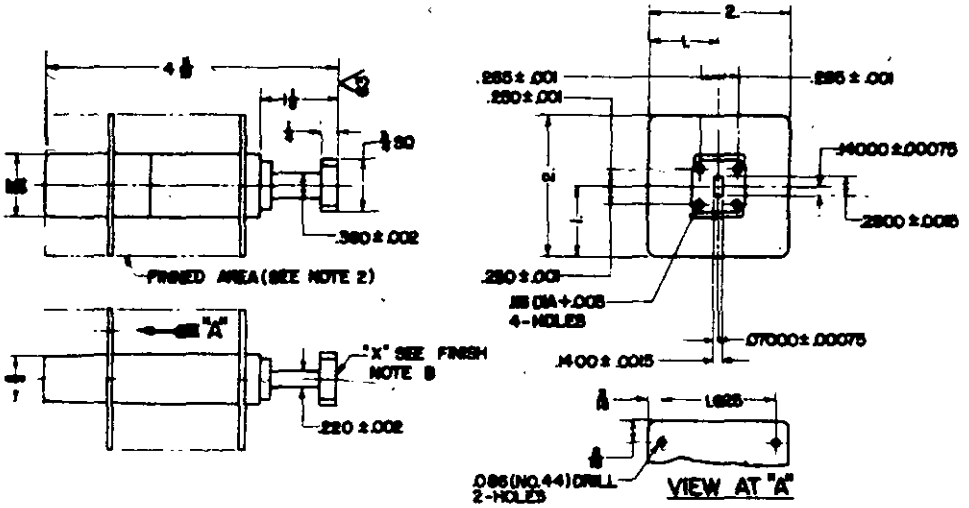

DETAIL (DUMMY LOAD)

NOTES:

1. FOR MATERIAL AND FINISH SEE PROCUREMENT SPECIFICATION.
2. ALL DIMENSIONS ARE IN INCHES. TOLERANCES, FRACTIONAL ± 1/64; DECIMAL ± .005, UNLESS OTHERWISE SPECIFIED.
3. QUANTITIES OF FINS REQUIRED WILL BE DEPENDENT ON HEAT LEVEL REQUIREMENTS OF THE LOAD.
4. ONE REQUIRED AT ASSEMBLY, ONE REQUIRED AS REPLACEMENT.
5. DUMMY LOAD TO BE USED WITH CHOKE FLANGE MS90055-600A.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) CANCELLED – FOR PROCUREMENT USE MIL-D-3954/12A

APPROVED 21 JUN 1957 REVISED (A) 15 MAY 1962 (B) 15 MAR 1980

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AR Other Cust EL	TITLE DUMMY LOAD, ELECTRICAL DA-158/U	MILITARY STANDARD MS35887
PROCUREMENT SPECIFICATION MIL-D-3954	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:30Z
Check the source to verify that this is the current version before use.

* U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/1559