FED. SUP CLASS 4730

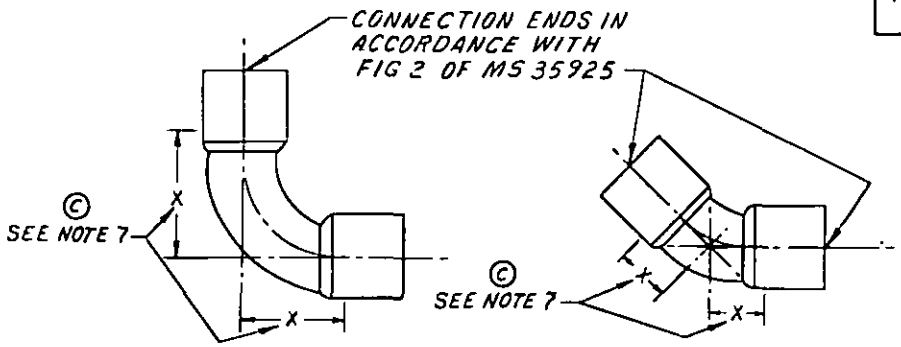

FIG 1 90° ELBOW FIG 2 45° ELBOW

© DASH NO.		© STD. REFRIG. TUBE SIZE
FIG 1	FIG 2	
-2	-2U	1/4
-3	-3U	3/8
-4	-4U	1/2
-5	-5U	5/8
-6	-6U	3/4
-7	-7U	7/8
-9	-9U	1 1/8
-11	-11U	1 3/8
-13	-13U	1 5/8
-17	-17U	2 1/8
-21	-21U	2 5/8
-25	-25U	3 1/8
-29	-29U	3 5/8
-33	-33U	4 1/8

1. FITTINGS SHALL BE MADE FROM COPPER CONFORMING TO ASTM B 75 COPPER NOS. 102, 120, or 122.
2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS WROUGHT-COPPER CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL SIZES SHOWN ARE OUTSIDE DIAMETER TUBE SIZES.
4. ALL DIMENSIONS GIVEN IN INCHES.
5. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

© 7. IN ACCORDANCE WITH ANSI B16-22, THE LAYING LENGTH ("X" IN ILLUSTRATION) CANNOT BE ESTABLISHED DUE TO VARYING MANUFACTURING PROCESSES. DIMENSION "X" SHALL BE IN ACCORDANCE WITH THE SUPPLIERS STANDARDS.

© 8. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS35917-2. THE DASH NUMBER DENOTES SIZE IN INCREMENTS OF 1/8 INCH.

APPROVED 22, SEP '58 REVISED (A) 5, JUL 1967 (B) 19, SEP 1972 © 21 MAR 75

REVIEW ACTIVITIES: ARMY MD, NAVY CS, DSA
USER ACTIVITIES: CR, MU EH, MC

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY-GL Other Cust USAF-82	TITLE ELBOWS, TUBE, 90 AND 45 DEGREE, SOLDER JOINT, REFRIGERATION	MILITARY STANDARD MS 35917
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.