INCH-POUND

MIL-PRF-1/1623C
9 July 1998
SUPERSEDING
MIL-E-1/1623B
11 May 1976

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, TRAVELING WAVE
TYPE 8175 1/

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: 1-kw power output amplifier, 2.9 to 3.1 GHz, periodic-permanent magnet focused.

ABSOLUTE RATINGS: See 1/ of table I.

Parameter:	Ef	eb	ik	Iw	iw	Pp	Pi (rf)	Du	tp	tk
Unit:	V	kv	a	mA	ma	W	w	----	μs	sec
Maximum	6.6	8	1.7	3.6	650	82	2	0.006	10	----
Minimum	6.0	6	----	----	----	----	----	2/	3/	120

PHYSICAL CHARACTERISTICS:

Dimensions:	See figure 1		Marking:	5/
DC connectors:	See figure 1		Construction:	All metal shell
RF connectors:	See figure 1		Weight:	14.5 pounds (max)
Cooling:	Forced air 4/		Mounting position:	Any

TEST CONDITIONS:

Parameter:	Ef	eb	pi (rf)	Du	tp	tk
Unit:	V	kv	w	---	μs	sec
Test condition 1:	6.3	6/	0	0.0055	5.5	120
Test condition 2:	6.3	6/	0.001	0.0055	5.5	120
Test condition 3:	6.3	6/	0.5	0.0055	5.5	120
Test condition 4:	6.3	6/	1.5	0.0055	5.5	120

Frequency	
F	GHz
1	2.9
2	3.0
3	3.1

GENERAL:

Qualification - Required. 7/

1/ Formerly type 334H

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Test	Conditions	Symbol	Limits Min	Limits Max	Unit
Conformance inspection, part 1 8/							
Heater current (nonoperating)	4289	----	Ef = 6.3 V	If	2.2	3.2	A
Electrode voltage (1) (cathode), small signal gain 6/	1261	----	F = F1 through F3; VSWR (load) = 1.5:1 (approximate)	ek	6.8	7.3	kv
Electrode voltage (2) (cathode), large signal gain) 6/	1261	----	F = F1 through F3; VSWR (load) = 1.5:1 (approximate)	ek	6.8	7.3	kv
Electrode current (cathode)	1256	3		ik	----	1.62	a
Gain (1)	4253	2	F = F1, F2, and F3	Gss	33	43	dB
Gain (2)	4253	3	F = F1, F2, and F3	G1s	33	40	dB
Gain (3)	4253	4	F = F1, F2, and F3	G1s	28.5	35	dB
Gain variation (1) 9/	4253	2	F = F1, F2, and F3	ΔGss	----	3	dB
Gain variation (2) 9/	4253	3	F = F1, F2, and F3	ΔG1s	----	2	dB
Gain variation (3) 9/	4253	4	F = F1, F2, and F3	ΔG1s	----	2	dB
Spurious output or stability 10/	4261	1		spo	----	-10	dBm
Input and output match 11/	4256	----	F = F1, F2, and F3; no voltages applied	VSWR	----	2.2:1	----
Output power and gain variation (1)	4251	3	F = F1; eb = 1.02	ΔPo	----	1	dB
Output power and gain variation (2)	4251	4	F = F3; eb = 0.98	ΔPo	----	1	dB
Conformance inspection, part 3							
Life test	----	3	Group D	t	1,000	----	hrs
Life-test end points 12/	----	3	F = F2	----	----	----	----
Gain (2)	4253	3	F = F2	G1s	31.75	----	dB
Low-frequency vibration 13/ 14/	1031	----	No voltages applied	----	----	----	----
Variable-frequency vibration 13/ 14/	1031	----	No voltages applied	----	----	----	----
Shock, specified pulse 13/ 14/	1042	----	Test condition G	----	----	----	----
Humidity 13/ 14/	1011	----	No voltages applied	----	----	----	----
Shelf life 14/ 15/	----	----		----	----	----	----
Permanence of marking 14/	1105	----		----	----	----	----

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ Cathode, one leg of heater, and focus electrode are connected internally. The anode-helix and collector are operated at ground potential.

2/ The average duty cycle shall not exceed 0.006 during any 31-millisecond interval, and no pulse width shall exceed 2 percent of the pulse period.

3/ The pulse duration (tp) shall be defined as the time interval between the first and last instants at which the instantaneous amplitude reached 90 percent of the peak pulse amplitude. The combination transition period of rise and fall times of the pulse, between the 10 percent and 90 percent amplitude points, shall not exceed 0.75 microsecond.

4/ 25 cfm of air at sea level is required for operation at ambient temperature to 65°C.

5/ The following information shall be included in the marking of each tube:

a. Serial number.

b. Heater voltage.

c. Pulse beam voltage for operation with small signal and large signal in accordance with 6/ (Gss/G1s).

d. iwdc/iwrf', where iwrf is helix current with pi of 0.5 watt at 3 GHz, and iwdc is the helix current with pi = 0.

e. Permanent legible inscription shall identify rf input and output connections, heater, heater-cathode, anode-helix, and ground stud.

6/ The optimum pulse beam voltage for small-signal gain and large-signal gain shall be specified for each tube and included on the identification plate of the tube. The tube under test (TUT) shall be operated within ± 3 percent of the voltage specified for the corresponding mode of operation.

7/ First article sample inspection shall conform to the requirements of appendix F of MIL-PRF-1 and shall consist of performing all test specified on this tube specification sheet. Invitation for bids should provide that the preparing activity reserves the right to waive the requirements for first article samples as to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending acquisition.

8/ Unless otherwise specified, the acceptance level for all tests listed under conformance inspection part 1, shall be 1.0, inspection level II.

9/ Small-signal gain variation and large-signal gain variation shall be the difference between the maximum gain and the minimum gain at the test frequencies specified.

10/ The input of the TUT shall be terminated with a matched load, and the output shall be connected to a +10 dB directional coupler. The signal from the arm of the coupler shall pass through Microlab HP-FH2801 and LP-FL3201 filters, or equivalent, into a crystal detector. The output of the coupler shall be connected through a 3-dB attenuator to a variable-phase short circuit. The spurious power output shall be the maximum signal detected at the crystal as the phase of the short is varied through the one-wave length at 3 GHz.

11/ The VSWR and frequency at both input and output shall be measured and recorded at the point of maximum VSWR in the frequency band.

12/ The life-test end points shall be the point in time when power output falls below 750 w peak under condition of 0.5 w input anywhere within the frequency band with tube operating into a matched load.

13/ During (or after) performance of specified test the TUT shall be capable of passing tests contained in conformance inspection, part 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

14/ This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as part of conformance inspection, part 2, code level D, with an acceptance level of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

15/ The tube tested and acquired in accordance with this specification sheet, shall be capable of shelf-life for a period of 12 months after date of shipment from the manufacturer's plant. Tubes placed in operation during this shelf-life period, shall meet all requirements of this tube specification sheet. Tubes found to be defective, within the shelf-life period, shall be replaced by the manufacturer at no cost to the Government, or its contractors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.

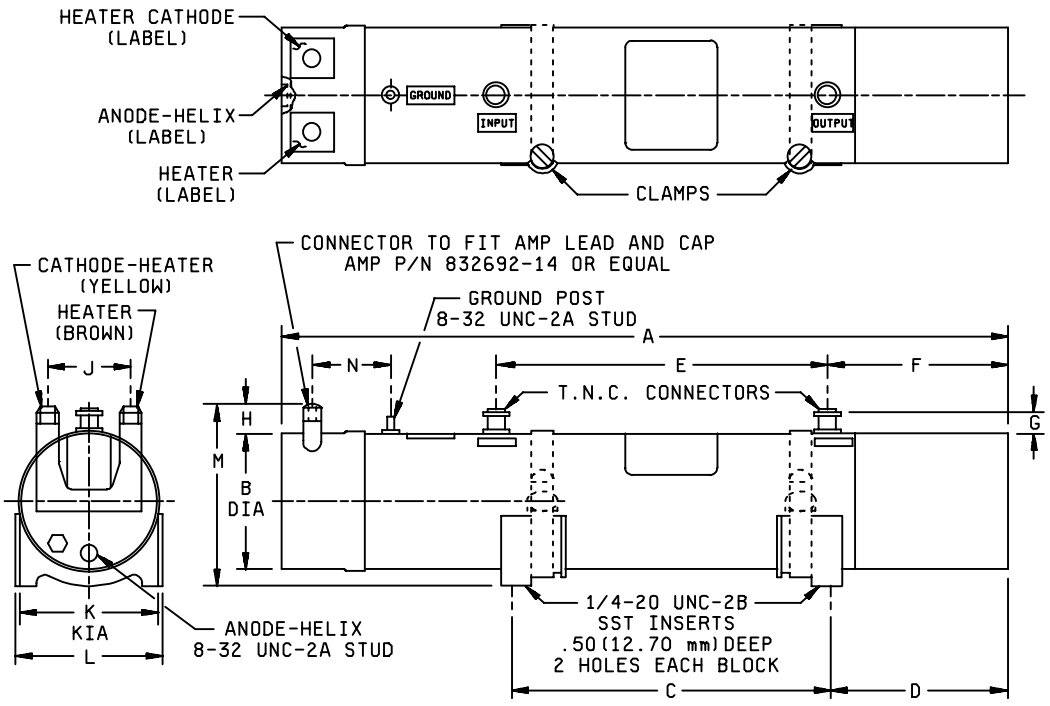

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 1 (see note)				
A	----	17.88	----	454.15
B	3.59	3.65	91.19	92.71
C	7.78	7.84	197.61	199.14
D	4.19	4.31	106.43	109.47
E	7.48	7.98	189.99	202.69
F	4.03	5.03	102.36	127.76
G	0.56	0.68	14.22	17.27
H	0.36	0.48	9.14	12.19
J	1.97	2.03	50.04	51.56
K	3.36	3.40	85.34	86.36
L	----	3.88	----	98.55
M	----	4.82	----	122.43
N	1.63	1.87	41.40	47.50

NOTE: Unless otherwise specified, the acceptance level for all tests listed under conformance inspection, part 1, shall be 1.0, inspection level II.

FIGURE 1. Outline drawing of electron tube type 8175 .

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, CG, MC, OS, SH
Air Force - 11, 99

Preparing activity:
DLA - CC

(Project 5960-3497)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:08Z
Check the source to verify that this is the current version before use.