
FED. SUP CLASS. 5306

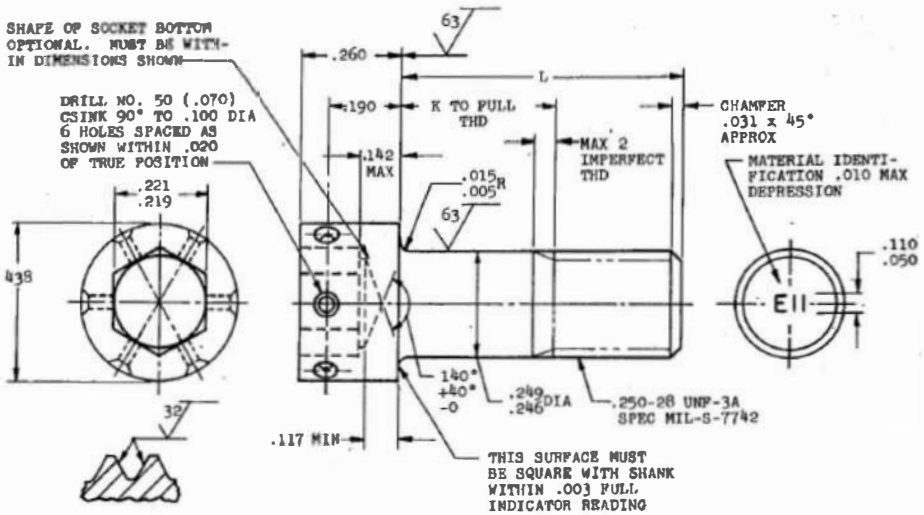

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.312	.562	AN148669	2.625	1.875	AN148683	4.375	3.625	AN148697
.500	(a)	AN148656	1.375	.625	AN148670	2.750	2.000	AN148684	4.500	3.750	AN148698
.562	(a)	AN148657	1.438	.688	AN148671	2.875	2.125	AN148685	4.625	3.875	AN148699
.625	(a)	AN148658	1.500	.750	AN148672	3.000	2.250	AN148686	4.750	4.000	AN148700
.688	(a)	AN148659	1.562	.812	AN148673	3.125	2.375	AN148687	4.875	4.125	AN148701
.750	(a)	AN148660	1.625	.875	AN148674	3.250	2.500	AN148688	5.000	4.250	AN148702
.812	(a)	AN148661	1.688	.938	AN148675	3.375	2.625	AN148689	5.125	4.375	AN148703
.875	.125	AN148662	1.750	1.000	AN148676	3.500	2.750	AN148690	5.250	4.500	AN148704
.938	.188	AN148663	1.875	1.125	AN148677	3.625	2.875	AN148691	5.375	4.625	AN148705
1.000	.250	AN148664	2.000	1.250	AN148678	3.750	3.000	AN148692	5.500	4.750	AN148706
1.062	.312	AN148665	2.125	1.375	AN148679	3.875	3.125	AN148693	5.625	4.875	AN148707
1.125	.375	AN148666	2.250	1.500	AN148680	4.000	3.250	AN148694	5.750	5.000	AN148708
1.188	.438	AN148667	2.375	1.625	AN148681	4.125	3.375	AN148695	5.875	5.125	AN148709
1.250	.500	AN148668	2.500	1.750	AN148682	4.250	3.500	AN148696	6.000	5.250	AN148710

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .003 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .003 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS7652

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR DESIGN AFTER 1 JAN 1960 SEE DRAWING MS9089

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jun 43 REVISED (1) 7 Jan 53 (2) 1 Aug 58 (3) 30 June 1961

PA 11
CUST AV, AS 11

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - SOCKET HEAD, 6 HOLES DRILLED, .250-28

AN4865L
SUPSD BY
AN148750

Source: https://assist.dla.mil -- Downloaded: 2026-02-2
Check the source to verify that this is the current version