MIL-B-920C

18 September 1974
SUPERSEDING
MIL-B-920B
30 March 1965

MILITARY SPECIFICATION

BARS, BUCKING, RIVET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers various types of rivet bucking bars.

1.2 Classification. Bucking bars shall be furnished in the following types and sizes as specified (see 6.2).

Type I	-	Tee head bucking bar
Type II	-	Universal bucking bar
Type IV	-	Bell bucking bar
Type V	-	Angle head bucking bar
Type VI	-	"L" head bucking bar
Type VII	-	Straight tapered bucking bar
Type VIII	-	Off-set, one way bucking bar
Type IX	-	Off-set, two way bucking bar
Type X	-	Trapezoidal bucking bar
Type XI	-	Channeled bucking bar

1.2.1 Sizes. Sizes for types VII, VIII and IX are shown on figures 6, 7 and 8, respectively.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATION

FEDERAL

* PPP-P-40 - Packaging and Packing of Hand Tools

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

STANDARD

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

E 18-65 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.4).

* 3.2 Materials. Bucking bars shall be made from steel or ductile (nodular) iron of the quality normally used by the manufacturer for bucking bars, provided that the completed item complies with all the provisions of this specification.

3.3 Design and construction.

3.3.1 Bucking bars shall be of the design and dimensions shown on figures 1 through 10 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

* 3.3.1.1 Dimensions and tolerances. Dimensions shall be in inches. Tolerances shall be in accordance with standard commercial practice.

* 3.3.2 Hardness. Bucking bars shall be heat treated to attain a hardness within the range of Rockwell C38 to 45 (see 4.5.1).

3.3.3 Recess depth. For types VII, VIII, and IX bars, the recess depth (for rivet heads) shall be in accordance with standard commercial practice.

* 3.4 Finish. All radii not specified shall be not less than 1/16 inch. All surfaces marked "f" (finish), and the cupped surfaces of types VII, VIII, and IX, shall be smooth and highly polished in accordance with standard commercial practice.

3.5 Marking. Each bar shall be permanently and legibly marked for identification with the manufacturer's name or readily identifiable trade mark.

* 3.6 Workmanship. The bucking bars shall be clean, and free of cracks, sharp edges, sharp corners, and burrs.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article. When a first article is required, the bucking bar shall be examined as specified in 4.4.2.1 and 4.4.2.2, and tested as specified in 4.5.1. Any nonconformance shall be cause for rejection of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

* 4.4.1 Component and material inspection. The supplier shall insure that all components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards unless excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.2 End item inspection. The lot shall be all bucking bars of one type and size offered for inspection at one time. The sample unit shall be one bucking bar.

* 4.4.2.1 Visual examination. The bucking bars shall be examined for defects in table I. The inspection level shall be level II, with an Acceptable Quality Level (AQL) of 2.5 for major defects, and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified	X	
Design	Configuration not as specified (see applicable figure)	X	
Workmanship	Bucking bars not free of burrs, sharp corners, sharp edges, or cracks	X	
	Not clean		X
Identification marking	Missing, incomplete, illegible or not permanent		X

* 4.4.2.2 Dimensional examination. The bucking bar shall be examined for compliance with dimensions specified. Any noncompliance with the dimension specified shall constitute a defect. The inspection level shall be S-4, with an AQL of 2.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

* 4.4.2.3 Testing of the end item. Bucking bars shall be tested for hardness in accordance with 4.5.1. The inspection level shall be S-2 with an AQL of 1.5 expressed in terms of defects per hundred units.

* 4.4.3 Examination of preparation for delivery. Examination shall be made to determine compliance with preservation, packaging, packing and marking requirements in accordance with PPP-P-40.

4.5 Test.

* 4.5.1 Hardness test. The hardness test shall be performed in accordance with ASTM E 18-65. Three determinations shall be made, all within the hardness range specified, to determine compliance with the requirements of 3.3.2.

5. PREPARATION FOR DELIVERY

* 5.1 Levels A, B, and C. Bucking bars shall be preserved, packaged, packed and marked for each level of protection in accordance with the applicable requirements of PPP-P-40 (see 6.2).

6. NOTES

6.1 Intended use. Rivet bucking bars covered in this specification are for use in forming heads on the shanks of rivets during riveting processes.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification
(b) Type and size (if applicable) required (see 1.2)
(c) When first article is required (see 3.1, 4.3 and 6.3)
(d) Selection of applicable levels of preservation, packaging, and packing (see 5.1)

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

6.4 The margins of this document have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last issue.

Custodians:

Army - GL
Navy - SH
Air Force - 84

User activities:

Army - AT, EL, ME, WC
Navy - YD, MC, OS

Preparing activity:

Army - GL

Project No. 5120-0665

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

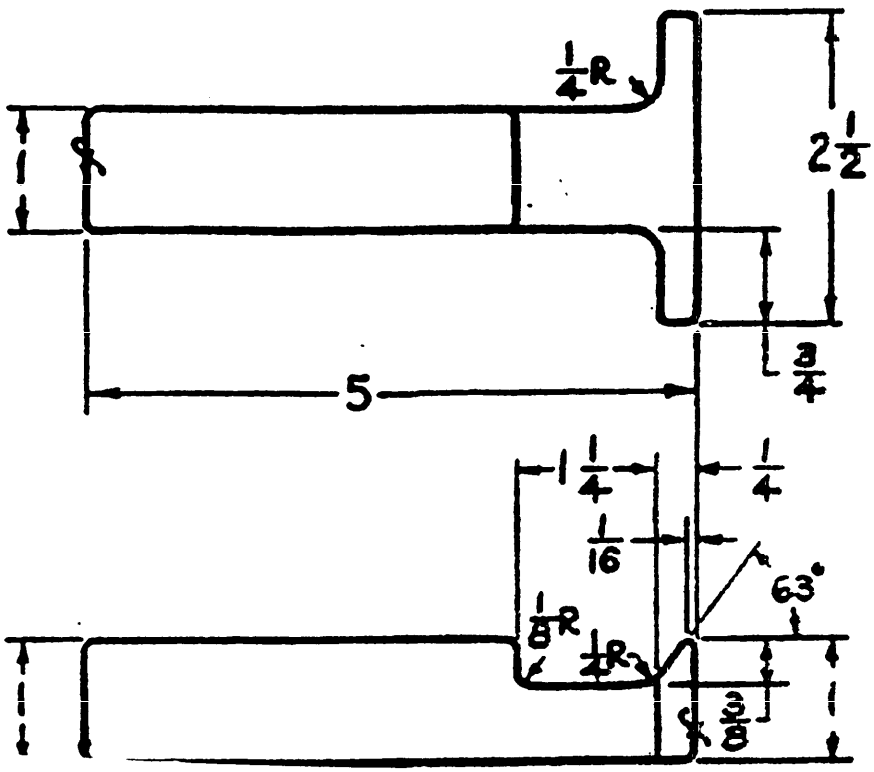


Figure 1. - Type I, tee head bucking bar.

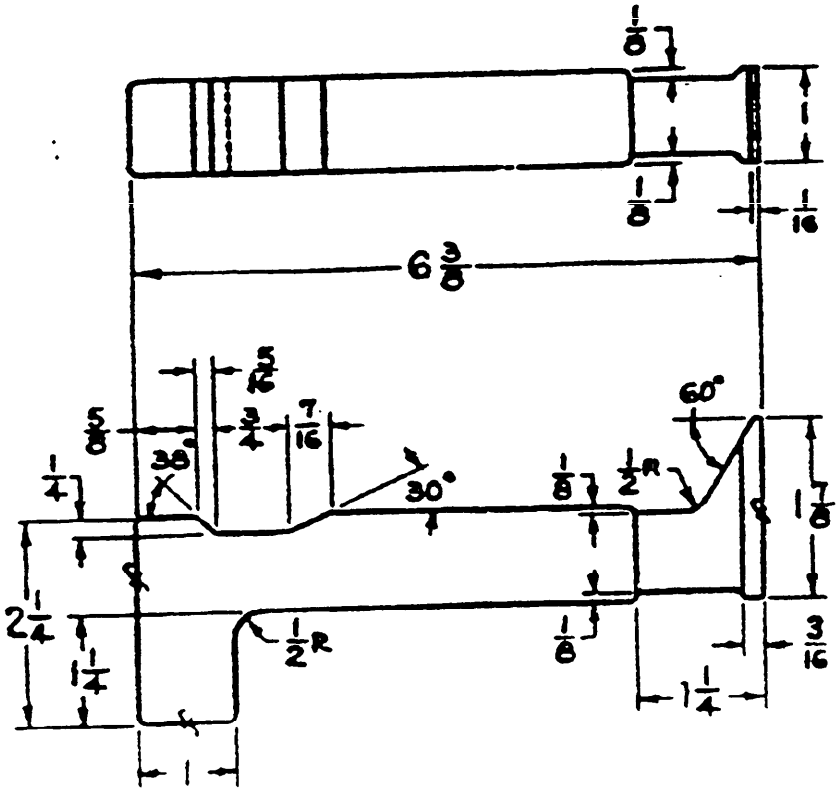


Figure 2. - Type II, universal bucking bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

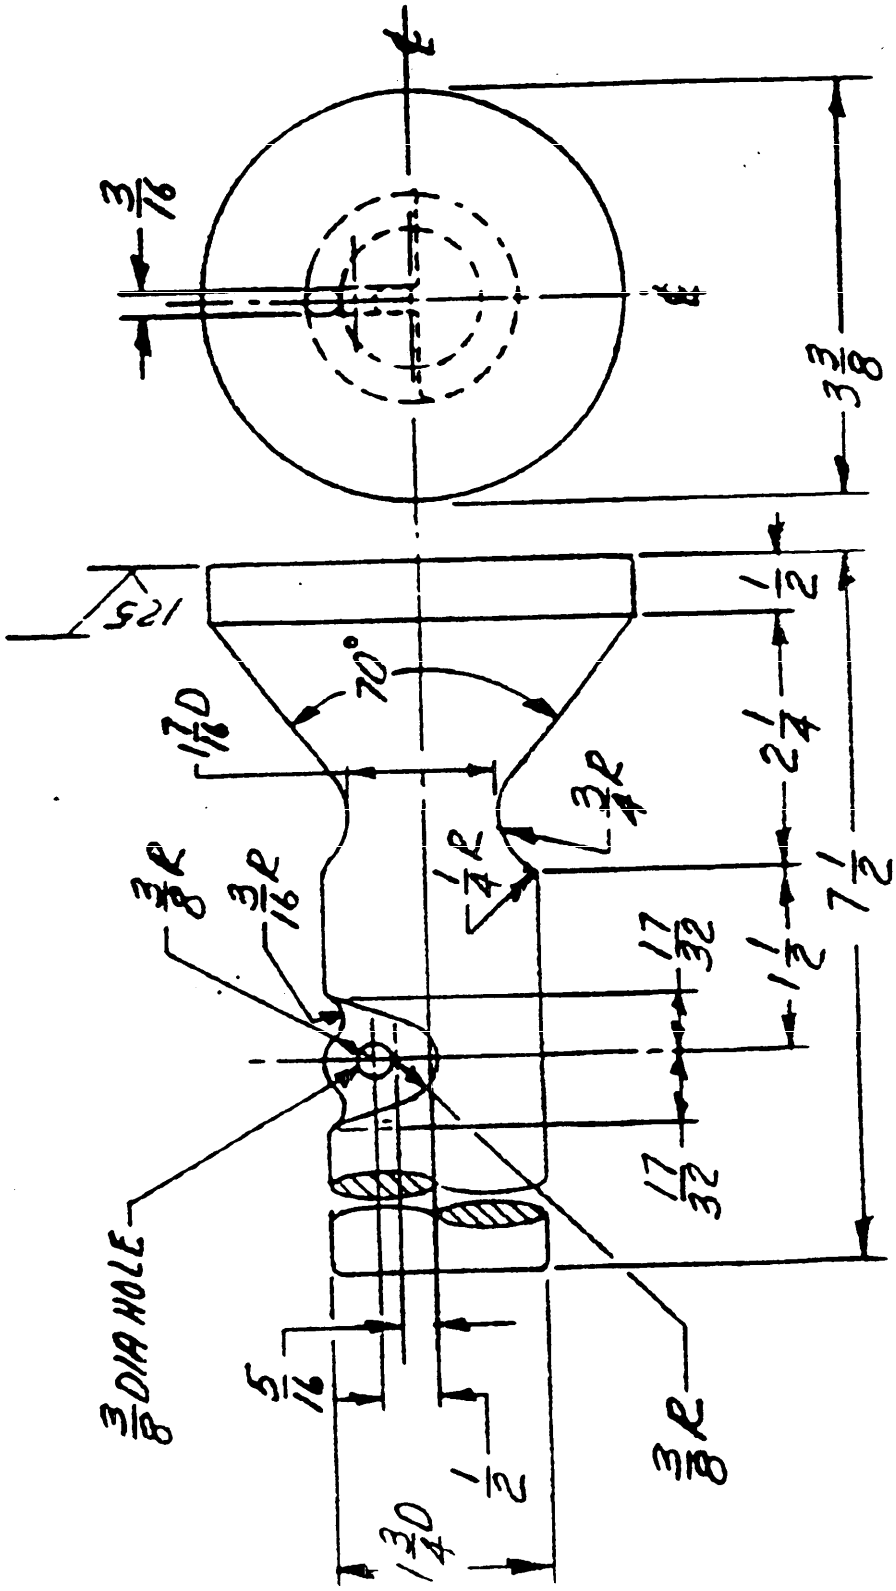


FIG 3 TYPE IV, BELL BUCKING BAR

Source: https://assist.dla.mil -- Downloaded: 20261O-16T12:21Z
Check the source to verify that this is the current version before use.

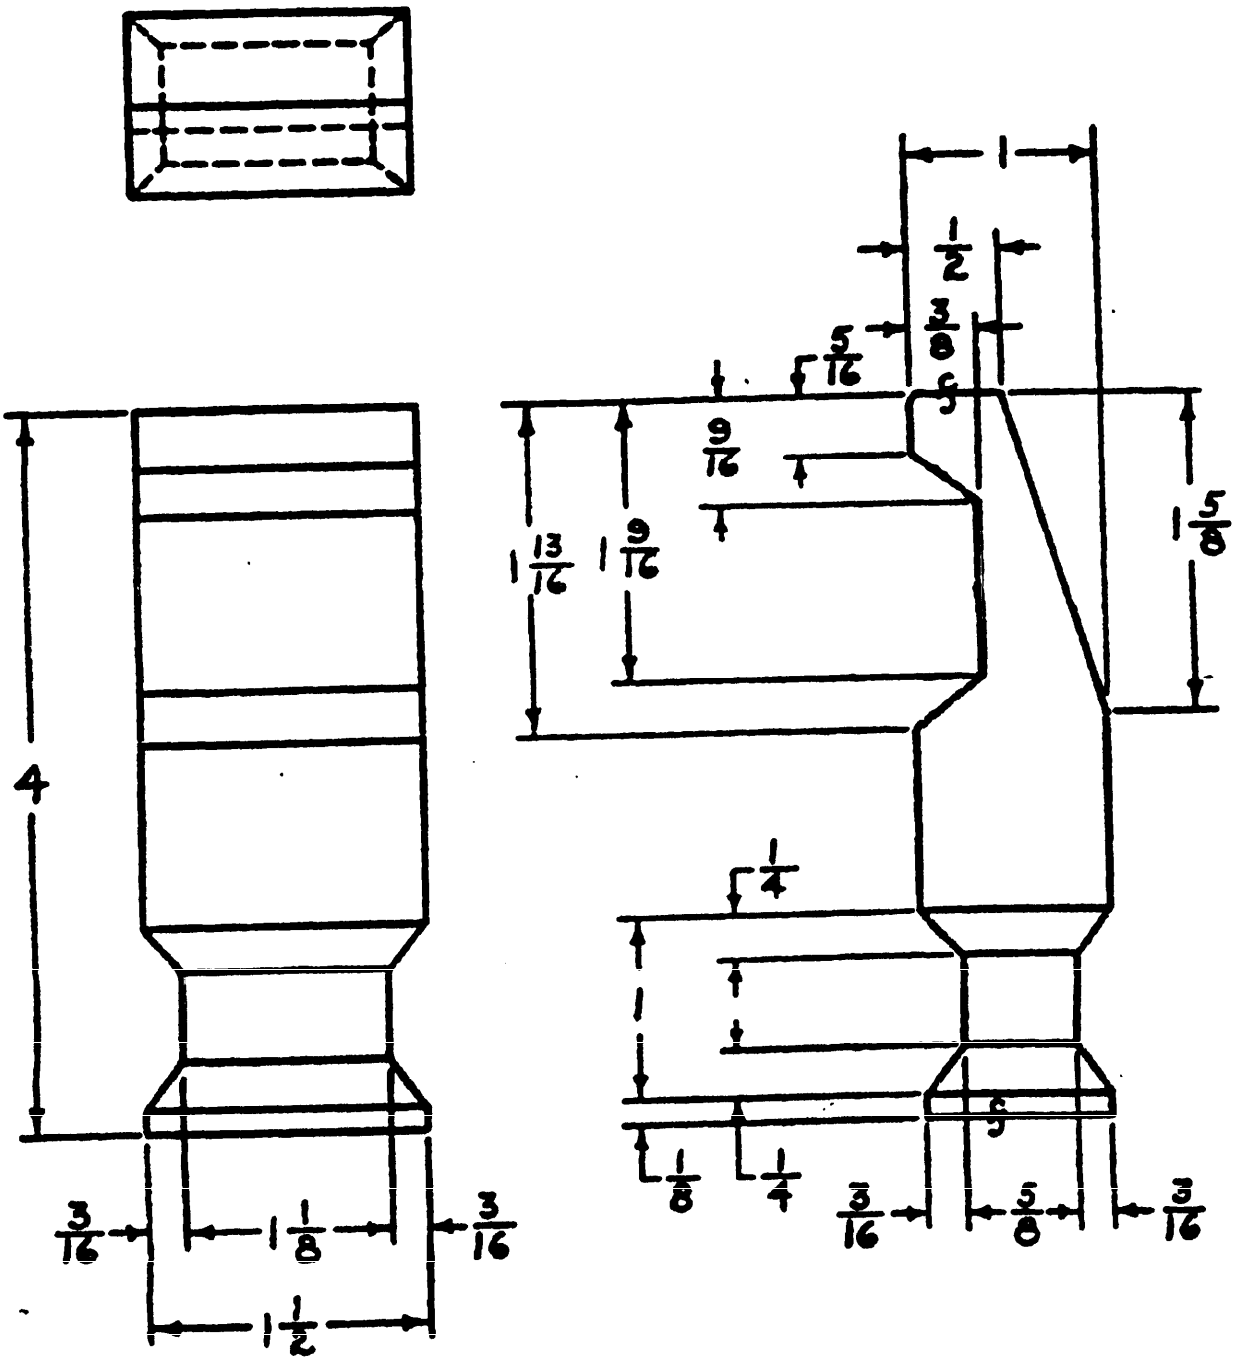


Figure 4. - Type V, angle head bucking bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.


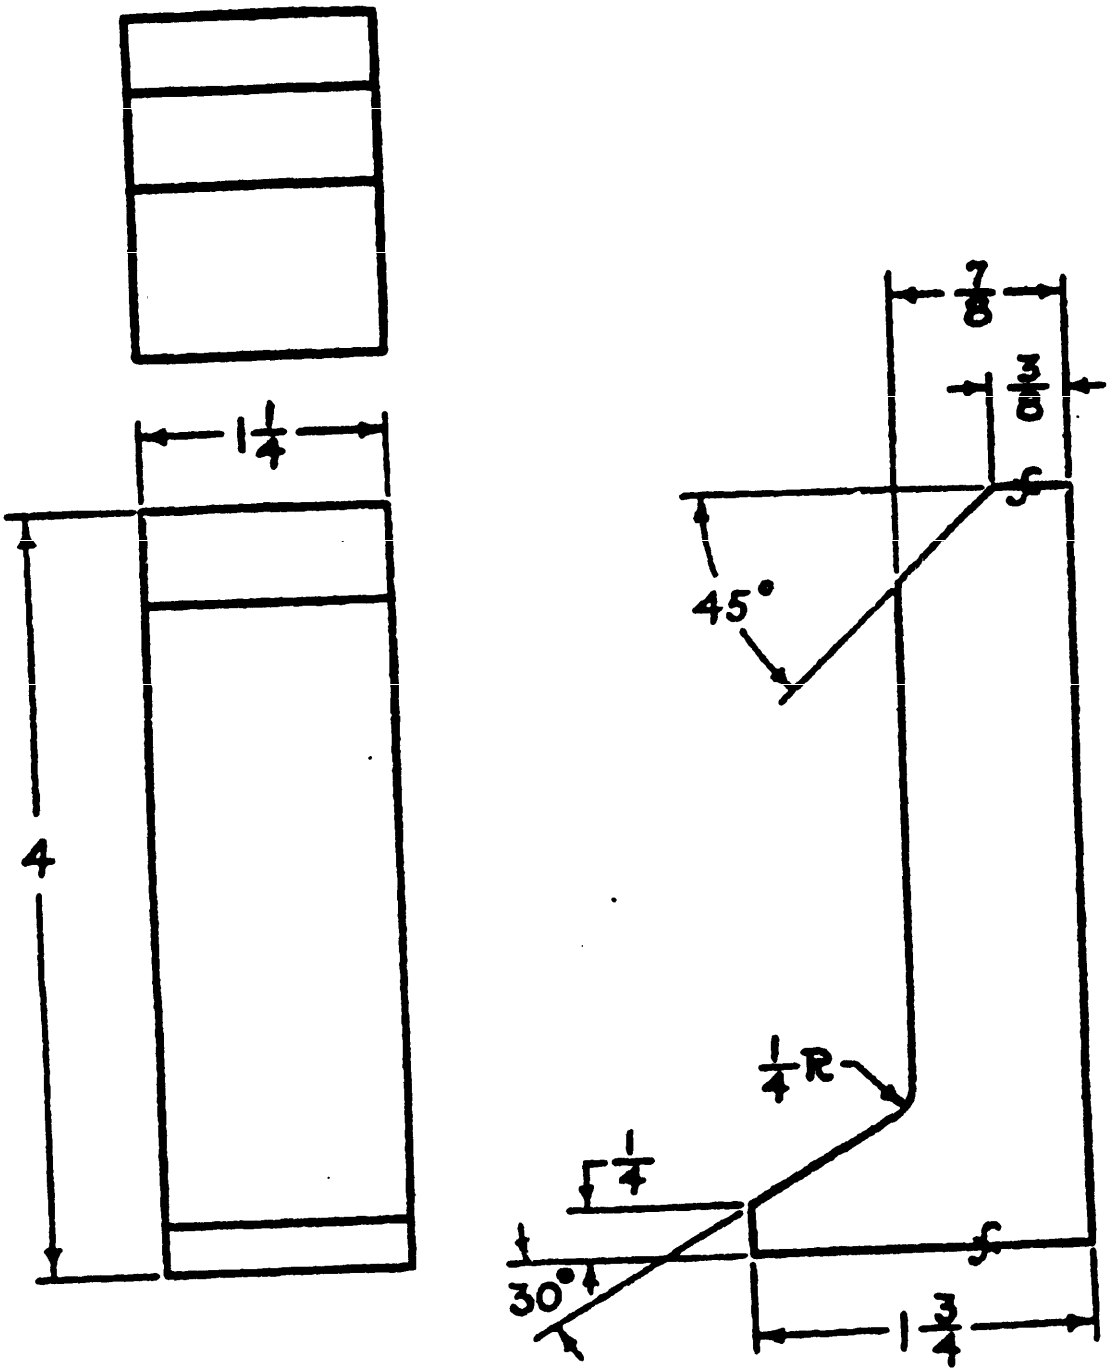


Figure 5. - Type VI, "L" head bucking bar.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.



Size	Rivet Recess Dia. (C) Inches	Stock Dia. (D) Inches	O/A Length (A) Inches	Taper Length (B) Inches
1	3/8	1-5/8	24	*A/A
2	1/2	1-5/8	24	A/A
3	5/8	2	24	A/A
4	3/4	2	30	A/A
5	7/8	2-1/8	30	A/A

* Any Acceptable


Figure 6. - Type VII, straight tapered bucking bar.

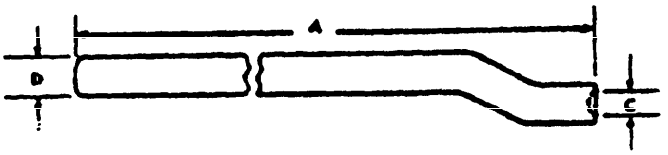

Size	Rivet Recess Dia. (C) Inches	Stock Dia. (D) Inches	O/A Length (A) Inches
1	1/2	1-5/8	24
2	5/8	2	24
3	3/4	2	30
4	7/8	2-1/8	30

Figure 7. - Type VIII, off-set, one way bucking bar.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:21Z
Check the source to verify that this is the current version before use.

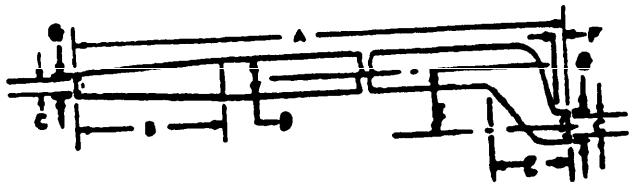

Size	Rivet Recess Dia. (C) In.	Taper Lg. (B) In.	O/A Lg. (A) In.	Stock Dia. (D) In.	Dim (E) Inches	Dim (F) Inches	Dia. (G) Inches
1	7/32	4-1/4	23-1/4	3/4	1	3/16	5/16
2	1/2	4-1/4	23-1/4	1-1/2	2	3/8	5/8

Figure 8. - Type IX, off-set, tapered, two way bucking bar.

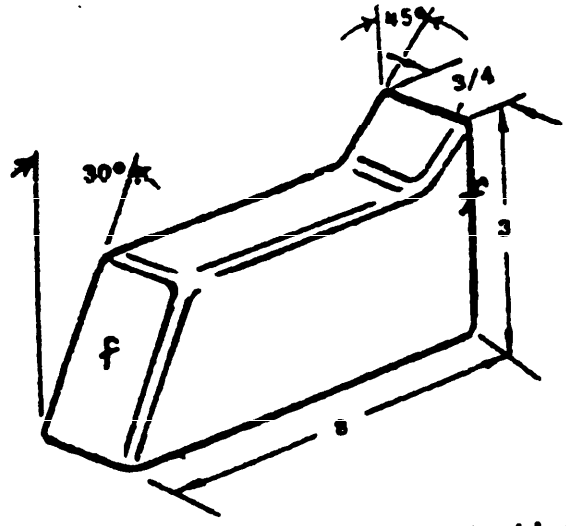


Figure 9. - Type X, trapezoidal bucking bar.

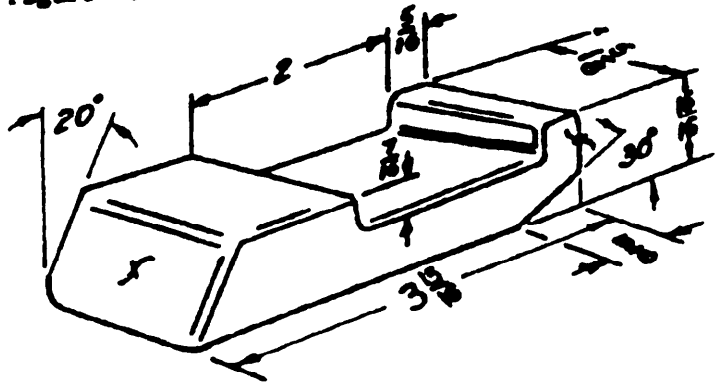


Figure 10. - Type XI, channeled bucking bar.

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:21Z
Check the source to verify that this is the current version before use.

FOLD

US Army Natick Labs
Natick, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STSNL-ID

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD - 314

Commander
U. S. Army Natick Laboratories
ATTN: STSNL-ID
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-920C - BARS, BUCKING, RIVET

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRAC

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T12:21Z
Check the source to verify that this is the current version before use.