MIL–C–982B
18 MAY 1961
SUPERSEDING
MIL–C–982A
4 APRIL 1952

MILITARY SPECIFICATION

COMPRESS AND SKULLCAP, HEAD DRESSING

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers a sterile, adjustable, head dressing of the skullcap type.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

FEDERAL

V–T–276	—Thread, Cotton.
FF–P–416	—Pins, Safety.
UU–T–116	—Tape, Paper, Gummed, Water-Resistant.
CCC–G–101	—Gauze, Absorbent.
CCC–M–911	—Muslin; Bleached.
DDD–T–86	—Tape; Cotton, Bleached, Dyed, or Grey, General Use.
PPP–B–636	—Boxes, Fiber.
PPP–T–45	—Tape, Gummed, Paper, Reinforced.
PPP–T–76	—Tape, Pressure-Sensitive, Adhesive, Paper, Water Resistant.
PPP–B–566	Boxes, Folding, Paperboard.
PPP–B–676	—Boxes, Set-Up, Paperboard.

STANDARDS

FEDERAL

Fed. Std. No. 751	—Stitches, Seams, and Stitching.

MILITARY

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

U. S. PHARMACOPOEIAL CONVENTION, INC.
Pharmacopeia of the United States.

(Application for copies should be addressed to the Mack Publishing Company, Easton, Pa.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Muslin.* Muslin shall conform to type II, bleached, of Specification CCC–M–911.

3.1.2 *Gauze.* Gauze shall conform to Specification CCC–G–101 for the types as hereinafter specified.

3.1.3 *Safety pins.* Safety pins shall conform to size 2 (medium) of Specification FF–P–416.

3.1.4 *Thread.* Thread shall conform to type IA2, 3-ply, ticket No. 60, of Specification V–T–276.

3.1.5 *Tape.* Tape shall be ½ inch in width conforming to Specification DDD–T–86.

FSC 6510

571075–61–(L-137)

Source: https://assist.dla.mil -- Downloaded: 202640-16T12:32Z
Check the source to verify that this is the current version before use.

3.1.6 *Inner wrapper.* Inner wrapper shall be parchmentized kraft paper weight 30 pounds, basis 24 by 36 inches (500 sheets).

3.2 Construction. The adjustable head dressing shall consist essentially of a gauze compress bandage and a cap of the skullcap type, one end of which shall be extended to form a tailed end for securing the cap.

3.2.1 *Gauze compress bandage.* Gauze compress bandage shall consist of a gauze pad and a bandage constructed as shown in figure 1. The pad shall measure 2½ ± ⅛ inches by 4 inches (plus ¼ inch, minus ⅛ inch), consisting of 16 thicknesses of type III gauze. The pad shall be so formed as to be free of any exposed raw edges. This pad shall be sewn in its center and within ¼ inch of one end, to the approximate center of a continuous bandage measuring 2½ ± ⅛ inches wide by 36 inches ± 1 inch long. This bandage shall be made from type I gauze and its cut edges shall be crushed during cutting to form a substantially ravel-free edge. The gauze compress bandage shall be folded with the ends of the bandage on the outside so that the pad may be opened and applied without contamination of the inner surface in handling.

3.2.2 *Cap.* Cap (skullcap type) and tailed end shall be of one piece of muslin as specified in 3.1.1 and shall be constructed as shown in figure 1. The crown portion of the cap shall be cut to form a conventional type crown adjustable to various head sizes.

3.3 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to Fed. Standard No. 751 for the types as specified herein:

All stitches shall be stitch type 301 with 12 to 14 stitches per inch.

All edges of the cap shall be finished with a ⅛ inch hem using stitch type EFB–1.

The muslin forming the crown of the cap shall be joined using seam type SSa–1 and by binding the seam with tape, or using stich type 606–FSa–1.

3.4 Color. Muslin, gauze, thread, and tape shall be brown, dyed to the acceptable color standard by use of Pontamine B. T. Brown concentrate in the amount of 2 ounces of dye per 100 pounds of material, or by use of an acceptable equivalent which shall be nontoxic.

3.5 Folding and compression. Folded compress bandage shall be placed inside the cap in such a manner that the compress bandage shall be readily accessible upon opening the wrapped dressing. The cap and gauze compress bandage shall be folded and compressed to a finished size measuring approximately 3 inches long by 2 inches wide by ⅝ inch thick.

3.6 Wrapping. Each compressed adjustable head dressing (gauze compress bandage and the cap) shall be wrapped, together with a safety pin, in kraft paper as specified in 3.1.6 and sealed. Wrapping shall be such as to maintain sterility of the dressing until the inner wrapper is opened. The wrapped package shall be sterilized.

3.7 Sterilization and certificate of sterilization.

3.7.1 *Requirement for certificate of sterility.* A certificate of sterility, listing all lot or control numbers, stating that samples from each sterilizer charge have been tested and found to be sterile, shall be submitted to the procuring activity. Sterility tests shall be conducted in accordance with U. S. P. requirements.

3.8 Workmanship. Workmanship shall be first class throughout. Adjustable head dressings shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Supplier responsibilities for inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection, as used in this specification,

Source: https://assist.dla.mil -- Downloaded: 20261O-16T12:32Z
Check the source to verify that this is the current version before use.

is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 *Certificates of quality.* When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 *For examination.* Sampling for examination shall be conducted in accordance with Standard MIL–STD–105.

4.2.2 *For tests.* Sampling for tests shall be conducted in accordance with Standard MIL–STD–105.

4.2.2.1 *Components.* Sufficient samples of the components shall be selected from each lot of material used in the manufacture of the compress and skullcap head dressings to perform tests as required by the applicable subsidiary specifications or by tests specified herein. When sample size for components covered by the subsidiary specifications is not specified, the sample size for each test shall be as indicated for inspection level L3 in Standard MIL–STD–105, except that the acceptance number shall be zero (0).

Muslin.....yards.
Gauze.....yards.
Tape.....yards.
Safety pins.....each.
Thread.....spool or cone.
Inner wrapper.....sheets.

No test shall fall below the minimum or exceed the maximum values specified. The sample unit for testing shall be the quantity necessary to perform all required tests one time each. Not less than 3 samples shall be taken regardless of lot size.

4.2.3 Where possible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 Examination. The compress and skullcap head dressings shall be examined to determine compliance with specification requirements.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 *Sterility.* The gauze compress bandages shall be tested for sterility in accordance with the method specified for sterility of solids in the latest revision of the U. S. Pharmacopeia.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Unit of issue.* One (1) compress and skullcap, as specified, constitutes one unit of issue.

5.1.2 *Packaging quantities.* The number of units of issue indicated in table I shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in procurement document.

TABLE I. *Packaging quantities*

Unit package	*Intermediate package*	*Protective package*	*Exterior container*
1 unit	12 units	288 units	576 units

5.1.2.1 *Packing variation permitted.* If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Unit package.* Each wrapped and sterilized package shall be further packaged in a bag fabricated from virgin polyethylene seamless tubing having an average wall thickness of not less than 0.004 inch, with no wall thickness at any point below 0.00325 inch. Excess air shall be expelled or evacuated, and closure effected by heat sealing.

5.1.3.2 *Intermediate package.* Intermediate package shall be a box constructed in accordance with Specification PPP–B–566 or PPP–B–676. Closure shall be adequate to prevent spillage of contents under normal handling.

5.1.3.3 *Protective package.* Protective package shall be a box of appropriate size constructed in accordance with Specification PPP–

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:32Z
Check the source to verify that this is the current version before use.

B–636, class 2, compliance symbol W5c or W5s, style RSC, except that the manufacturer's joint shall be effected either by sealing as specified in 3.3.3.3 of Specification PPP–B–636, or by means of metal stitches.

5.1.3.3.1 *Closure.* Closure shall be effected by means of tape conforming to the requirements of Specification UU–T–116, PPP–T–45, or PPP–T–76. The tape shall be not less than 2 inches wide, and shall be applied to both top and bottom so that the center seams are covered their full length. Tape shall extend at least 2 inches onto each of the end panels. Tape will not be required on manufacturer's joint.

5.2 Packing.

5.2.1 *Level A.*

5.2.1.1 *Exterior container.* Exterior container shall be a box of appropriate size constructed in accordance with Specification PPP–B–636, class 2, compliance symbol V3c or V3s, style RSC.

5.2.1.1.1 *Closure.* Closure shall be as specified in 30.3.2.1 of Specification PPP–B–636, and in addition, the top and bottom center seams shall be closed by means of tape conforming to the requirements of Specification UU–T–116, PPP–T–45, or PPP–T–76. The tape shall be not less than 2 inches wide and shall extend at least 2 inches onto each of the end panels. Strapping will not be required.

5.3 Marking.

5.3.1 *Unit package.* Each unit package shall be printed or bear a label with the following data printed in black, in appropriately size type: Stock number, unit, quantity, and the legend:

"ONE HEAD DRESSING, ADJUSTABLE ONE MEDIUM COMPRESS BANDAGE STERILIZED DYED DRESSING"

Below this legend shall appear the name and address of the manufacturer and any additional information required by Federal or State laws.

5.3.2 *Intermediate package.* Each intermediate package shall be marked in accordance with section 5 of Standard MIL–STD–129, and shall bear the legend "DYED DRESSINGS".

5.3.3 *Protective package.* Each protective package shall be marked in accordance with section 5 of Standard MIL–STD–129.

5.3.4 *Exterior container.* Exterior container shall be marked in accordance with Standard MIL–STD–129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

6.3 Transportation description. Transportation description applicable to this item is:

Dressings, Surgeons

Carload minimum weight 24,000 pounds subject to Rule 34 of the Uniform Freight Classification.

Truckload minimum weight 24,000 pounds per National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army—M
Navy—Md
Air Force

Preparing activity:
Navy—Bureau of Medicine and Surgery (MMSA)

Source: https://assist.dla.mil -- Downloaded: 202640-16T12:32Z
Check the source to verify that this is the current version before use.

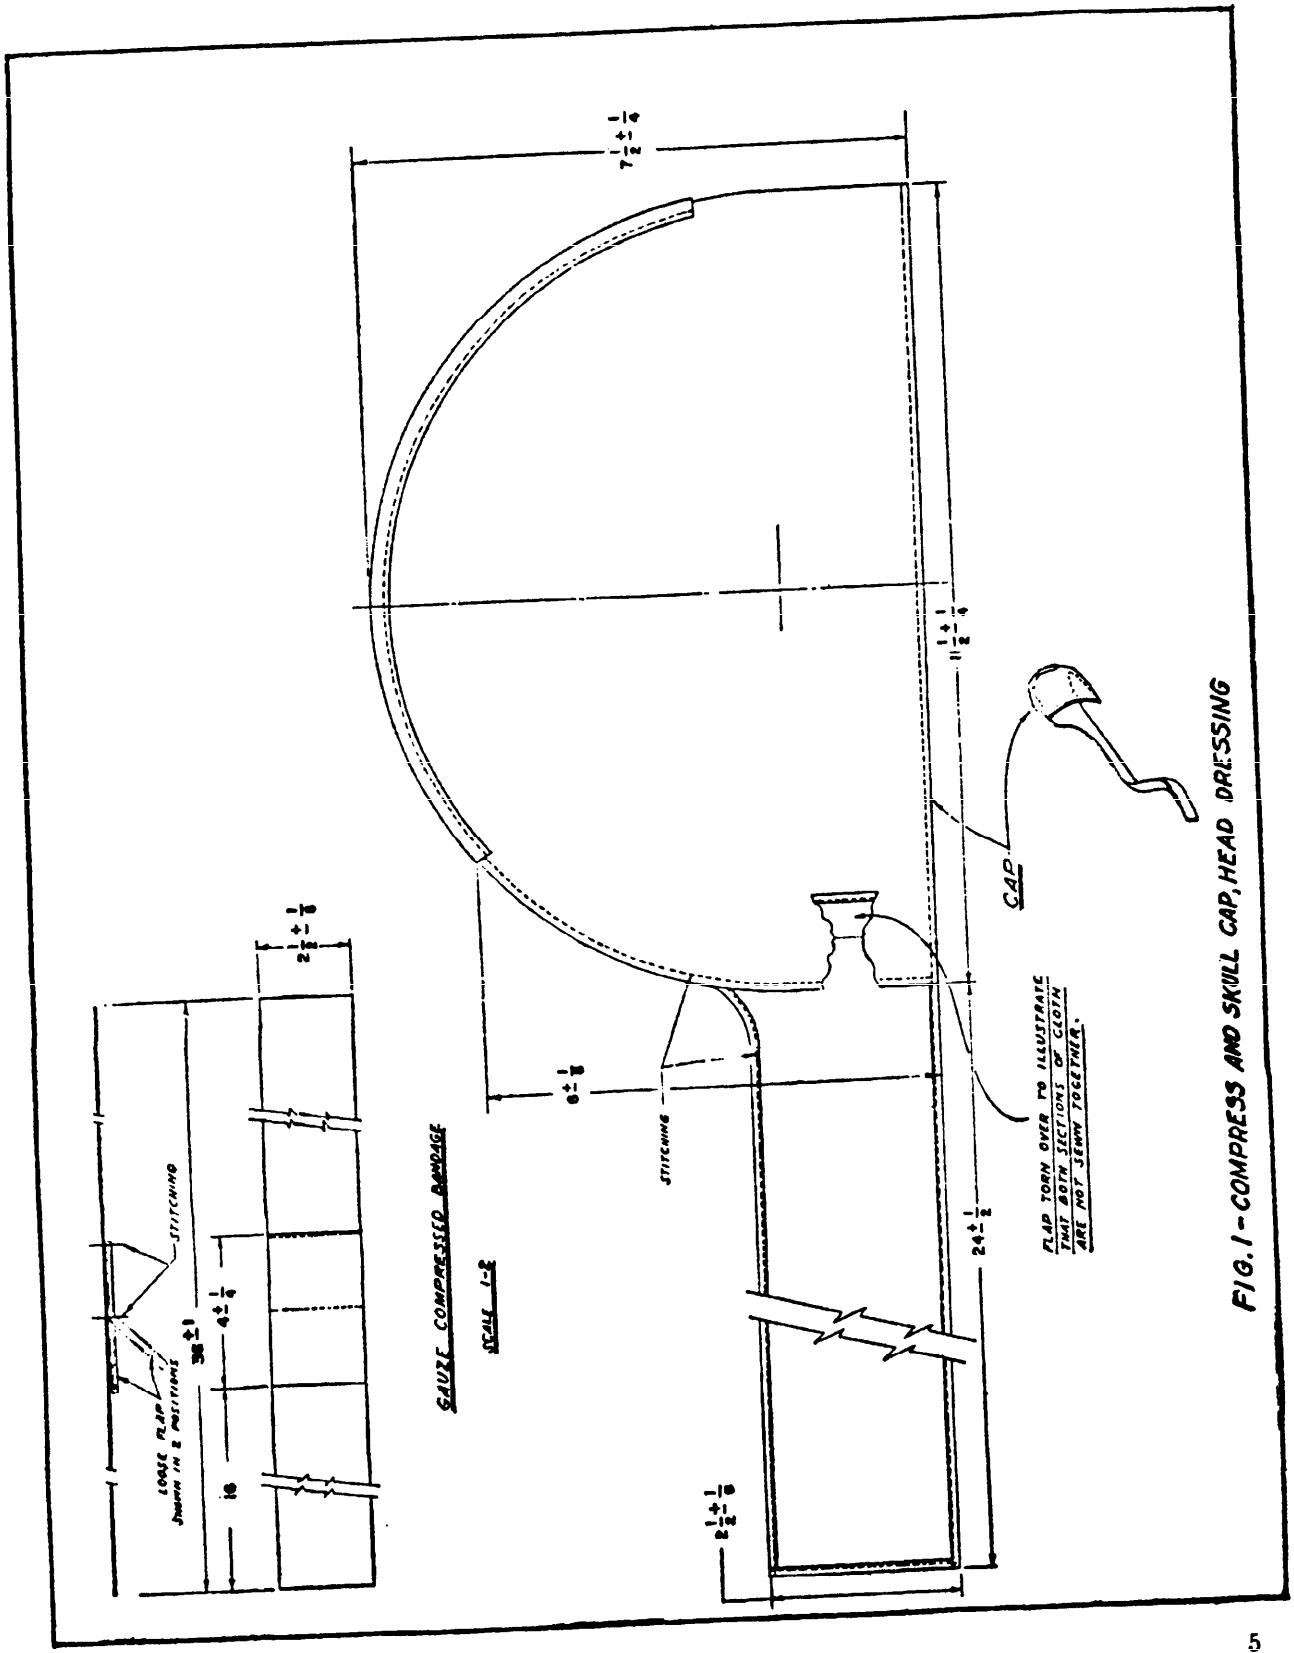


FIG. 1 - COMPRESS AND SKULL CAP, HEAD DRESSING

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:32Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DOD 316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Chief, Bureau of Medicine and Surgery
Attn: Code 4631, Building 4, Potomac Annex
Washington, DC 20372

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:32Z
Check the source to verify that this is the current version before use.