
MIL-L-970/10A(SHIPS)
18 November 1966
SUPERSEDING
MIL-L-970/10(SHIPS)
17 June 1966

MILITARY SPECIFICATION SHEET

LAMPHOLDER, MINIATURE BI-PIN FOR FLUORESCENT LAMPS

The complete requirements for procuring the lampholder described herein shall consist of this document and the latest issue of Specification MIL-L-970.

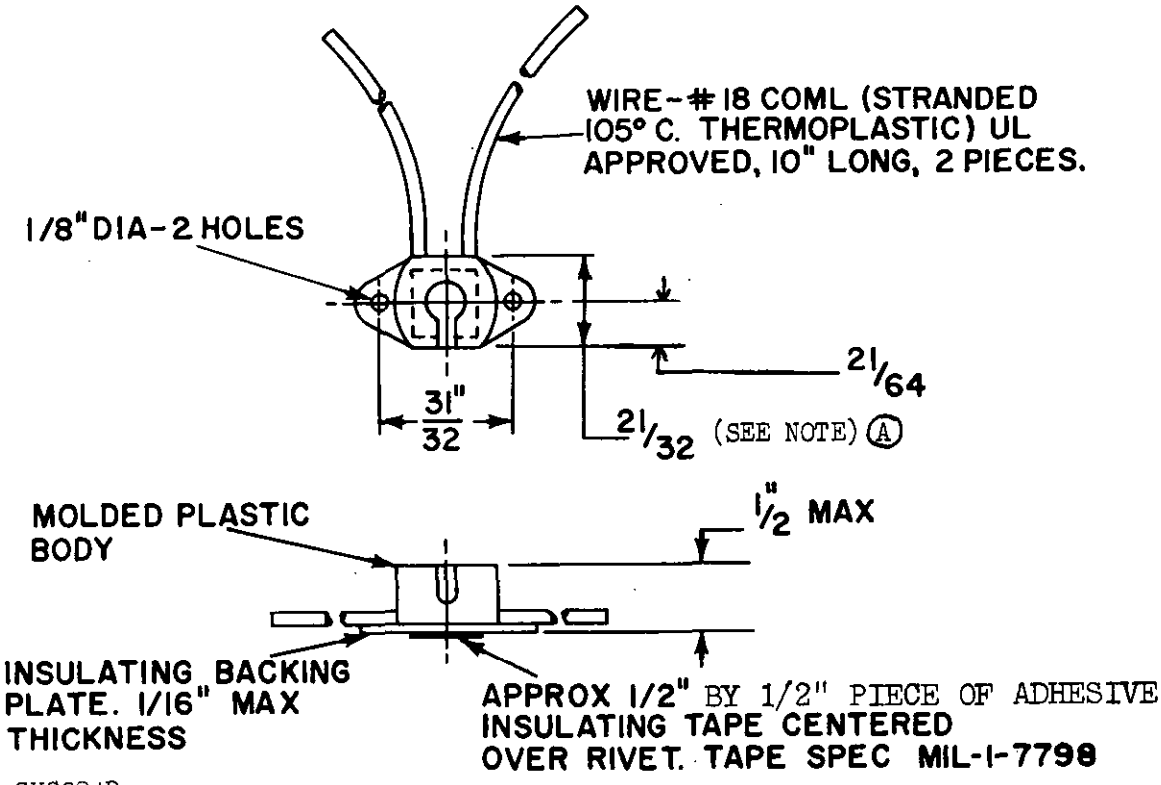

SH8394B

(A) NOTE:
When this lampholder is used by lighting equipment manufacturers for new design construction, this dimension may be varied up to a maximum of 3/4 inch. When supplied as a replacement part, this dimension shall be maintained as shown.

(A) For change see page 1.

FSC 6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material and design:	Lampholder shall consist of a molded plastic body, housing two contacts to which lead wires are securely attached and covered by an insulating backing plate or plates. The molded plastic body shall be formed with a keyhole slot to allow lamp pins to enter and turn and shall have two electrical conducting contacts so formed that good electrical contact is made and maintained when the lamp is rotated 90° from the entering position. The contacts shall locate and hold lamps in the 90° position.
Assembled lampholder:	May be any commercial type of similar shape and contour complying with the above requirements and bearing Underwriter's Laboratory approval.
Tests:	
Dielectric strength:	Lampholder shall withstand for one minute a dielectric test voltage of 900 volts, a.c., 60 cycles, between current carrying parts and ground.
Heat:	Not required.
Pull:	The test sample shall be rigidly supported and a 20-pound weight applied to each lead of the lampholder in a direction perpendicular to the plane of the lead entry hole. The weight shall be applied gradually and allowed to hang free for a period of 1 minute.
Shock and vibration:	Shall be conducted with lampholder mounted in a fixture as shown on MS16673.

Preparing activity:
Navy-SH
(Project 6250-N093SH)

(A) For change see page 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:29Z
Check the source to verify that this is the current version before use.