
MILITARY SPECIFICATION SHEET

LAMPHOLDER, BASE-MOUNTED, CANDELABRA SCREW, (TWO LAMP),

150-VOLT, 75 WATTS, SINGLE CIRCUIT AND TWO-CIRCUIT

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lampholder described herein shall consist of this document and the latest issue of Specification MIL-L-970.

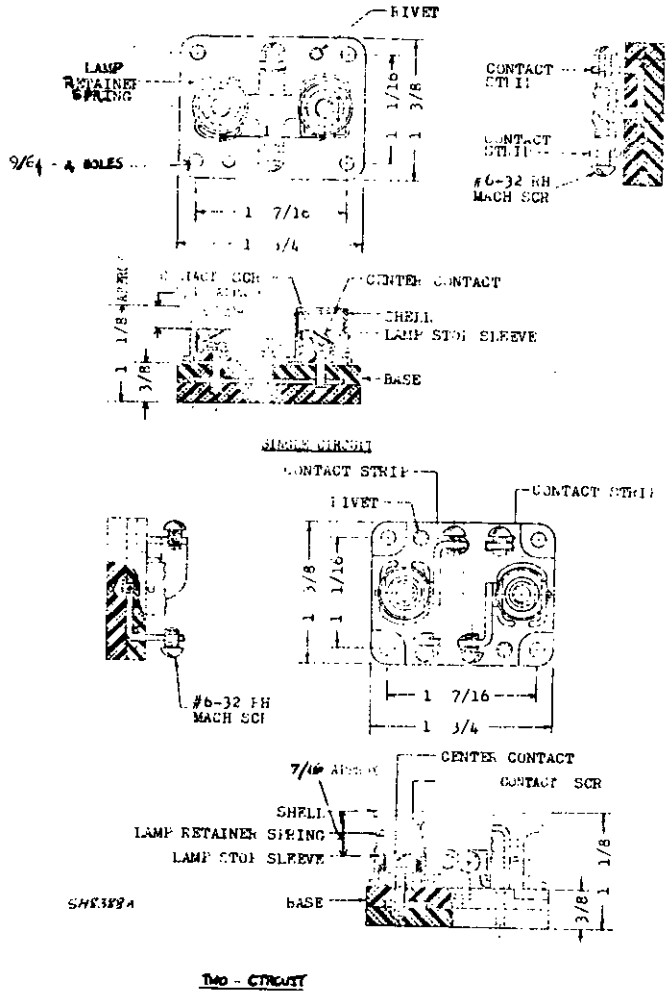

NOTE: All dimension are in inches. Unless otherwise specified, tolerances for fractions are ±1/64 inch.

FIGURE 1. Base mounted lampholder.

FSC 6250

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design:

Dimensions and configurations:	See figure 1. Lampholders shall be designed to accommodate two candelabra screw base lamps.
Base and lamp stop sleeve:	Material shall be type MAI-30 or MAI-60 of MIL-M-14. When base is molded in one piece, rivets are not required.
Center contact and spring:	Material shall be phosphor bronze.
All other parts:	Material for all other parts shall be brass.
Electrical rating:	150 volts, 75 watts.

TESTS:

First article inspection:	Shall be in accordance with MIL-L-970, except the heat test is not required.
Quality conformance inspection:	Shall be in accordance with MIL-L-970.

GENERAL INFORMATION: General information is as follows:

(a) Military part number:
Single Circuit: M970/4-001
Two Circuits: M970/4-002

(b) National Stock Number:
Single Circuit: 6250-00-295-2858
Two-circuit: None assigned

(c) Requirements formerly covered on Military Standard MS 16750 and Drawing 9000-S6405-73455.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH

(Project 6250-N129)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:28Z
Check the source to verify that this is the current version before use.