INCH-POUND
MIL-PRF-64266/10
25 November 2008

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG STYLE, MULTIPLE REMOVABLE TERMINI, DUST COVER, SCREW THREADS, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification sheet and MIL-PRF-64266.

Dust covers for MIL-PRF-64266 receptacles shall be in accordance with MIL-PRF-64266/11.

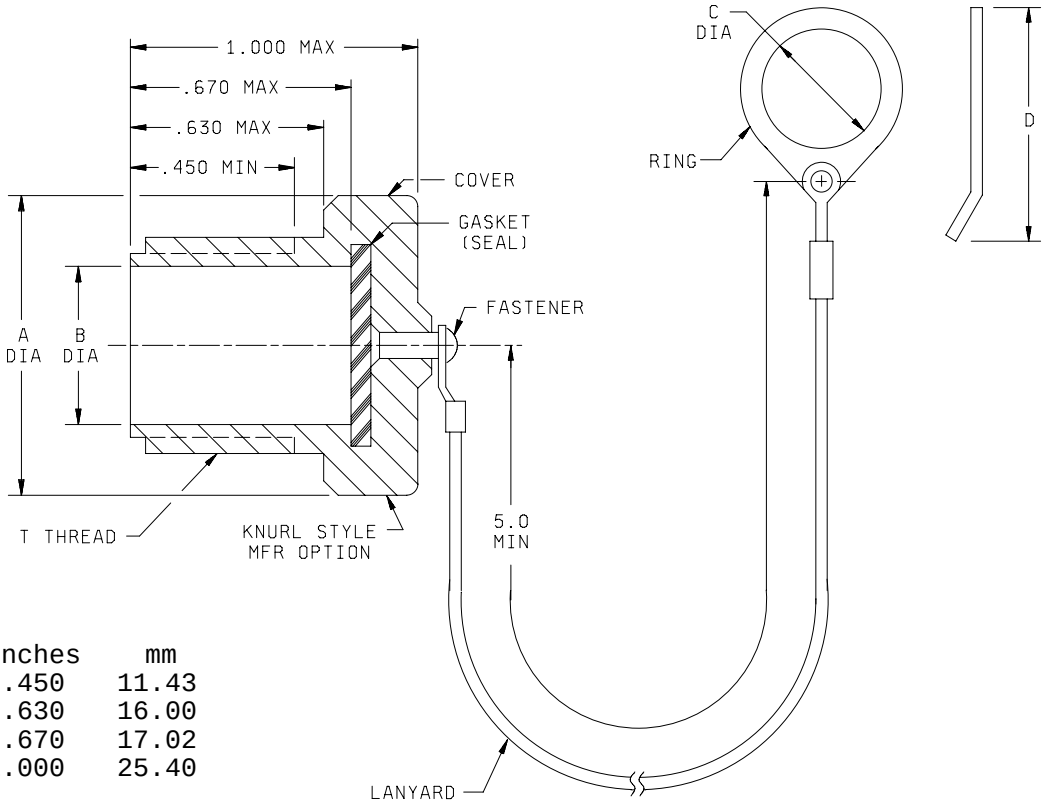

Inches	mm
.450	11.43
.630	16.00
.670	17.02
1.000	25.40

FIGURE 1. Plug dust cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Shell size	T thread Class 2A	A dia max		B dia		C dia min		D max	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm
11	.750-.1P-.2L-D.S.	1.028	26.11	.581 .569	14.75 14.45	.709	18.0	1.650	41.91
13	.875-.1P-.2L-D.S.	1.141	28.98	.705 .693	17.90 17.60	.787	20.0	1.800	45.72
15	1.062-.1P-.2L-D.S.	1.263	32.08	.877 .865	22.27 21.97	.906	23.0	1.950	49.53
23	1.500-.1P-.2L-D.S.	1.705	43.26	1.299 1.287	32.99 32.69	1.339	34.0	2.483	63.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions apply to plated/finished part.
4. The connector plug interface dimensions shall be in accordance with figure A-1 of MIL-PRF-64266.

FIGURE 1. Plug dust cover - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 herein and MIL-PRF-64266, figure A-1.

Weight: Weight shall not exceed the specified value in table I for the applicable shell size. Weight includes lanyard and ring.

TABLE I. Dust cover weights.

Shell size	Composite		Aluminum		Stainless steel	
	ounces	grams	ounces	grams	ounces	grams
11	0.28	8.0	0.49	14.0	1.27	36.0
13	0.35	10.0	0.56	16.0	1.59	45.0
15	0.42	12.0	0.71	20.0	1.94	55.0
23	0.63	18.0	1.06	30.0	3.17	90.0

Gasket: Gasket shall be bonded to cover or mechanically retained.

Lanyard: Lanyard shall be free to rotate on fastener. Lanyard attachment shall consist of a coated stainless steel wire rope with ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Marking:

Part or Identification Number (PIN): Marked dust cover.

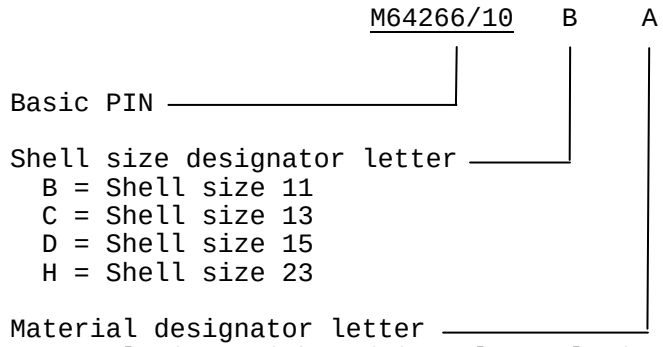

PIN example: M64266/10BA

Referenced documents. In addition to MIL-PRF-64266, this specification sheet references the following document:

MIL-PRF-64266/11

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6060-2007-008)

Review activities:
Navy - AS
Air Force - 13, 19, 93, 99
NASA - NA

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.