INCH-POUND
MIL-PRF-64266/5
25 November 2008

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, PLUG AND RECEPTACLE STYLE, MULTIPLE REMOVABLE GENDERLESS TERMINI, SCREW THREADS, 45° BACKSHELL, HEAVY DUTY, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification sheet and MIL-PRF-64266.

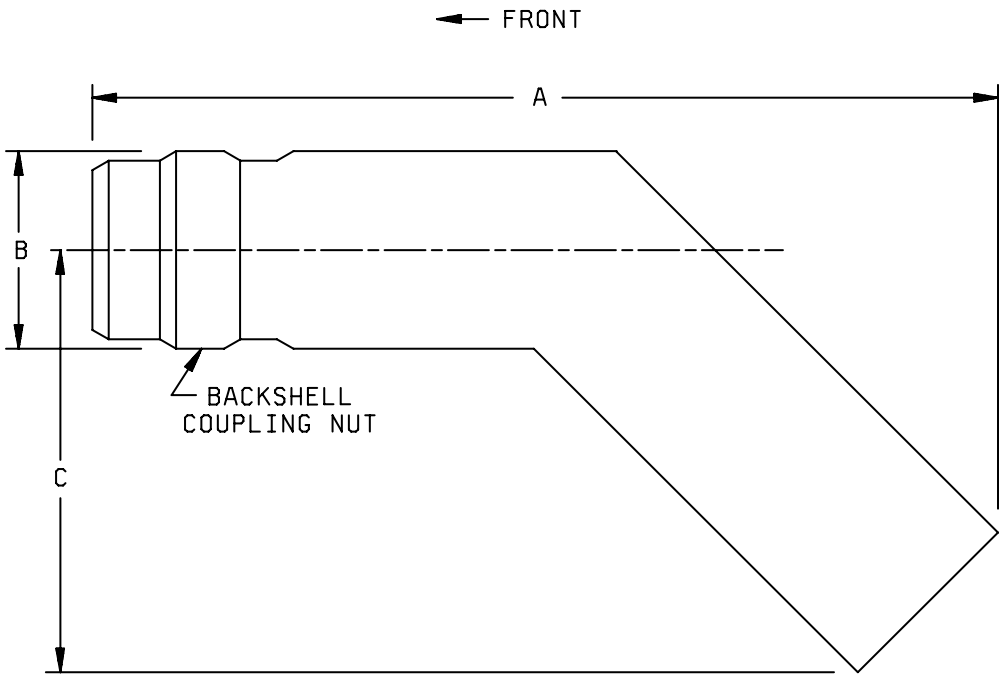

FIGURE 1. 45° Backshell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Shell size	Shell size designator	Backshell dash number	Dimension A maximum	Dimension B maximum	Dimension C maximum
11	B	1	3.2 (81)	1.2 (30.5)	3.0 (76)
13	C	1	3.2 (81)	1.2 (30.5)	3.1 (79)
15	D	1, 2	3.2 (81)	1.3 (33)	3.1 (79)
23	H	1	6.500 (165.10)	2.250 (57.15)	4.200 (106.68)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Dimensions apply to plated/finished part.
5. Backshell internal configuration not shown. The backshell interface dimensions shall be in accordance with figure A-6 of MIL-PRF-64266.

FIGURE 1. 45° Backshell - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 herein and MIL-PRF-64266, figure A-6.

Weight:

Shell size	Weight (ounces), gram, maximum
11	7.5
13	9.0
15	11.5
23	23.5

Fiber optic cable:

Cable diameter: .315 inch ± .020 inch (8.00± 0.51 mm), or .425 ± .043 inch (10.80 ± 1.09 mm), .563 ± .039 (14.3 ± 1.00 mm) or .817 ± .049 inch (20.75 ± 1.24 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Cable strain-relief capture mechanism. A capture mechanism, inside the backshell, shall be used to affix the outer cable strength member to the backshell. This mechanism shall prevent cable movement that may otherwise cause tension on the single fiber cables and terminated termini.

Sealing mechanism. The backshell shall contain means to provide environmental sealing integrity. This integrity includes that at the connector interface and at the cable entrance interface.

Cleaning procedures: Each shipment of connectors shall include recommended cleaning procedures. The following wording or equivalent is recommended "To clean, use lint free wipe dampened with alcohol and blow dry with air".

Marking:

PIN: Marked on coupling ring of the backshell (see table I).

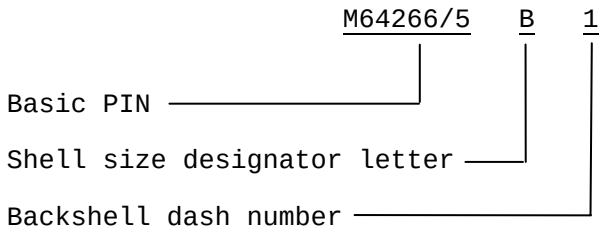

TABLE I. PIN designators.

Shell size	Designator	Backshell dash number	Cable diameter range
11	B	1	.280 - .346 (7.11 – 8.79)
13	C	1	.280 - .346 (7.11 - .879)
15	D	1	.280 - .346 (7.11 - 8.79)
		2	.380 - .465 (9.65 – 11.81)
23	H	1	.768 – 1.000 (19.51 – 25.40)

Mating counterpart: Backshell mates with MIL-PRF-64266/1 receptacle, MIL-PRF-64266/2 plug, and MIL-PRF-64266/3 receptacle.

Installation and removal tools: Adjustable or 1.25 inches (31.8 mm) open end wrench, strap wrench, and scissors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-64266, this specification sheet references the following documents:

MIL-PRF-64266/1
MIL-PRF-64266/2
MIL-PRF-64266/3

Custodians:
Army - CR
Navy - SH
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6060-2006-007)

Review activities:
Navy - AS
Air Force - 13, 19, 93, 99
NASA - NA

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:20Z
Check the source to verify that this is the current version before use.